ORDER NO.MTNC060480AE

# Service Manual

## Digital High Definition Plasma Television

Simplified

# TH-42PX6U
# TH-50PX6U

GP9DU Chassis

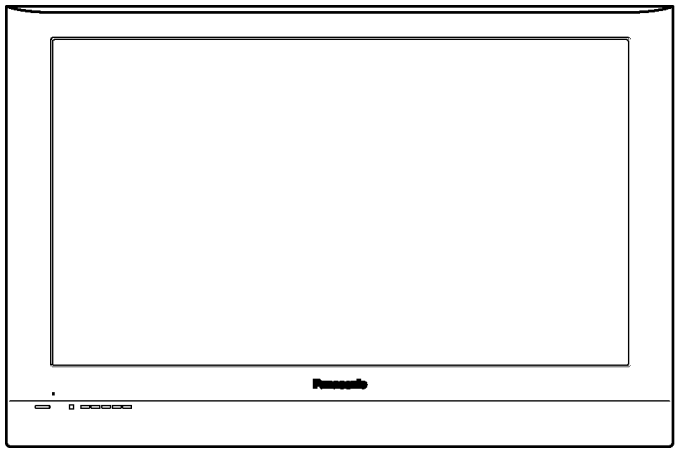

**Please file and use this manual together with the service manual for Model No.**
**TH-42PX600U, Order No.MTNC0601991CE.**
**TH-50PX60U, Order No.MTNC0601992CE.**

## Specifications

| | |
|---|---|
| **Power Source** | AC 120 V, 50 / 60 Hz |
| **Power Consumption** | |
| **Maximum** | 390 W (TH-42PX6U), 515 W (TH-50PX6U) |
| **Standby condition** | 0.2 W |
| **Plasma Display panel** | |
| **Drive method** | AC type |
| **Aspect Ratio** | 16:9 |
| **Contrast Ratio** | (max) 10000:1 |
| **Visible screen size** | 106 cmV (TH-42PX6U), 127 cmV (TH-50PX6U) |
| **(W × H × Diagonal)** | 36.3” × 20.4” × 41.6” (920 mm × 518 mm × 1,056 mm) (TH-42PX6U) |
| | 43.6” × 24.5” × 50.0” (1,106 mm × 622 mm × 1,269 mm) (TH-50PX6U) |
| **(No. of pixels)** | 786,432 (1,024 (W) × 768 (H)) [3,072 × 768 dots] (TH-42PX6U) |
| | 1,049,088 (1,366 (W) × 768 (H)) [4,098 × 768 dots] (TH-50PX6U) |
| **Sound** | |
| **Speaker** | 4.8” × 2.4” (120 mm × 60 mm) × 2 pcs, 8 Ω |
| **Audio Output** | 20 W [10 W + 10 W], (10% THD) |

Panasonic®

© 2006 Matsushita Electric Industrial Co., Ltd. All rights reserved. Unauthorized copying and distribution is a violation of law.

| | | |
|---|---|---|
| **Channel Capability (Digital/Analog)** | **VHF/UHF:** 2 - 69, **CATV:** 1 - 135 | |
| **Operating Conditions** | **Temperature :** 0 °C - 40 °C | |
| | **Humidity :** 20 % - 80 % RH (non-condensing) | |
| **Connection Terminals** | | |
| **INPUT 1-2** | **VIDEO:** RCA PIN Type × 1 1.0 V[p-p] (75 Ω) | |
| | **S-VIDEO:** Mini DIN 4-pin Y: 1.0 V[p-p] (75 Ω) C: 0.286 V[p-p] (75 Ω) | |
| | **AUDIO L-R:** RCA PIN Type × 2 0.5 V[rms] | |
| **COMPONENT VIDEO INPUT 1-2** | **Y:** 1.0 V[p-p] (including synchronization) | |
| | **$P_B$, $P_R$: ±** 0.35 V[p-p] | |
| | **AUDIO L-R:** RCA PIN Type × 2 0.5 V[rms] | |
| **HDMI 1-2** | TYPE A Connector1.0 V[p-p] (including synchronization) | |
| | **AUDIO L-R:** RCA PIN Type × 2 0.5 V[rms] | |
| **Card slot (SERVICE ONLY)** | SD CARD slot × 1 | |
| **AV PROG. OUT** | **VIDEO:** RCA PIN Type × 1 1.0 V[p-p] (75 Ω) | |
| | **AUDIO L-R:** RCA PIN Type × 2 0.5 V[rms] | |
| **DIGITAL AUDIO OUT** | PCM/ Dolby Digital, Fiver Optic | |
| **FEATURES** | 3D Y/C FILTER | |
| **Dimensions ( W × H × D )** | | |
| **Including pedestal** | 42.1” × 30.1” × 12.6” (1,068 mm × 764 mm × 320 mm) (TH-42PX6U) | |
| | 49.5” × 34.6” × 14.6” (1,257 mm × 877 mm × 370 mm) (TH-50PX6U) | |
| **TV Set only** | 42.1” × 27.6” × 3.8” (1,068 mm × 701 mm × 97 mm) (TH-42PX6U) | |
| | 49.5” × 32.1” × 3.8” (1,257 mm × 814 mm × 97 mm) (TH-50PX6U) | |
| **Weight** | | |
| **Including pedestal** | 70.5 lb. (32 kg) (TH-42PX6U) | 97.0 lb. (44 kg) (TH-50PX6U) |
| **TV Set only** | 66.1 lb. (30 kg) (TH-42PX6U) | 90.4 lb. (41 kg) (TH-50PX6U) |

**Notes:**

- Design and Specifications are subject to change without notice. Weight and Dimensions shown are approximate.

**⚠ WARNING**

This service information is designed for experienced repair technicians only and is not designed for use by the general public.
It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product.
Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

# CONTENTS


**Page**

**1 Difference PCB Structure sheet ..... 4**
1.1. TH-42PX6U ..... 4
1.2. TH-50PX6U ..... 4
**2 Service Hint ..... 5**
2.1. TH-42PX6U ..... 5
2.2. TH-50PX6U ..... 6
**3 Plasma panel replacement method ..... 7**
3.1. Remove the S-Board ..... 7
3.2. Remove the K-Board ..... 7
**4 Location of Lead Wiring ..... 8**
4.1. Lead of Wiring (1) ..... 8
4.2. Lead of Wiring (2) ..... 9
**5 Conductor Views ..... 11**
5.1. H-Board ..... 11
5.2. K and S-Board ..... 13

**Page**

5.3. DG-Board ..... 14
5.4. DT-Board ..... 16
**6 Schematic and Block Diagram ..... 19**
6.1. Schematic Diagram Note ..... 19
6.2. Main Block Diagram (42inch) ..... 20
6.3. Main Block Diagram (50inch) ..... 21
6.4. H-Board Block Diagram ..... 22
6.5. H-Board (1 of 3) Schematic Diagram ..... 23
6.6. H-Board (2 of 3) Schematic Diagram ..... 24
6.7. H-Board (3 of 3) Schematic Diagram ..... 25
6.8. K and S-Board Block and Schematic Diagram ..... 26
6.9. DG-Board (1 of 3) Block Diagram ..... 27
6.10. DG-Board (2 of 3) Block Diagram ..... 28
6.11. DG-Board (3 of 3) Block Diagram ..... 29
6.12. DG-Board (1 of 8) Schematic Diagram ..... 30

6.13. DG-Board (2 of 8) Schematic Diagram ····· 31
6.14. DG-Board (3 of 8) Schematic Diagram ····· 32
6.15. DG-Board (4 of 8) Schematic Diagram ····· 33
6.16. DG-Board (5 of 8) Schematic Diagram ····· 34
6.17. DG-Board (6 of 8) Schematic Diagram ····· 35
6.18. DG-Board (7 of 8) Schematic Diagram ····· 36
6.19. DG-Board (8 of 8) Schematic Diagram ····· 37
6.20. DT and GS-Board Block Diagram ····· 38
6.21. DT-Board (1 of 6) Schematic Diagram ····· 39
6.22. DT-Board (2 of 6) Schematic Diagram ····· 40
6.23. DT-Board (3 of 6) and GS-Board Schematic Diagram ··· 41
6.24. DT-Board (4 of 6) Schematic Diagram ····· 42
6.25. DT-Board (5 of 6) Schematic Diagram ····· 43
6.26. DT-Board (6 of 6) Schematic Diagram ····· 44
**7 Parts Location & Mechanical Replacement Parts List ····· 45**
7.1. Parts Location (TH-42PX6U) ····· 45
7.2. Parts Location (TH-50PX6U) ····· 46
7.3. Packing Exploded Views ····· 47
7.4. Mechanical Replacement Parts List (TH-42PX6U) ····· 48
7.5. Mechanical Replacement Parts List (TH-50PX6U) ····· 49
**8 Electrical Replacement Parts List ····· 50**
8.1. Replacement Parts List Notes ····· 50
8.2. Electrical Replacement Parts List (TH-42PX6U) ····· 51
8.3. Electrical Replacement Parts List (TH-50PX6U) ····· 79

# 1 Difference PCB Structure sheet

## 1.1. TH-42PX6U

| Board name | Parts No. | | Remarks |
|---|---|---|---|
| | TH-42PX60U | **TH-42PX6U** | |
| DT | TNAG167S | **TNAG170S** | Changed |
| HC | TNPA3855S | **TNPA3855E** | * |
| DG | TNPA3903BBS | **TNPA3903BGS** | Changed |
| H | TNPA3769S | **TNPA3769ABE** | Changed |
| PA | TXNPA1BJTUJ | **TXNPA1BJTUE** | * |
| K | TNPA3762AGS | **TNPA3603AES** | Changed |
| S | TNPA3964ABS | **TNPA3604ACS** | Changed |
| G | TNPA3764ADS | **-----** | Deleted |
| GS | TNPA3853ABS | **-----** | Deleted |
| GK | TNPA3965ACS | **-----** | Deleted |
| D | TNPA3810AHS | | |
| C1 | TXNC11BJTUJ | **TXNC11BJTUE** | * |
| C2 | TXNC21BJTUJ | **TXNC21BJTUE** | * |
| SU | TXNSU1BJTUJ | **TXNSU1BJTUE** | * |
| SD | TXNSD1BJTUJ | **TXNSD1BJTUE** | * |
| SC | TXNSC1BJTUJ | **TXNSC1BJTUE** | * |
| SS | TXNSS1BJTUJ | **TXNSS1BJTUE** | * |
| P | TXN/P1BJTU | | |

* Changed Parts No. only.

## 1.2. TH-50PX6U

| Board name | Parts No. | | Remarks |
|---|---|---|---|
| | TH-50PX60U | **TH-50PX6U** | |
| DT | TNAG167S | **TNAG170S** | Changed |
| HC | TNPA3855S | **TNPA3855E** | * |
| DG | TNPA3903BCS | **TNPA3903BHS** | Changed |
| H | TNPA3769S | **TNPA3769ABE** | Changed |
| PA | TXNPA1BJTUJ | **TXNPA1BJTUE** | * |
| K | TNPA3762AGS | **TNPA3603AES** | Changed |
| S | TNPA3964ABS | **TNPA3604ACS** | Changed |
| G | TNPA3764ADS | **-----** | Deleted |
| GS | TNPA3853ABS | **-----** | Deleted |
| GK | TNPA3965ACS | **-----** | Deleted |
| D | TNPA3820ACS | | |
| C1 | TXNC11BHTUJ | **TXNC11BHTUE** | * |
| C2 | TXNC21BHTUJ | **TXNC21BHTUE** | * |
| C3 | TXNC31BHTUJ | **TXNC31BHTUE** | * |
| C4 | TXNC41BHTUJ | **TXNC41BHTUE** | * |
| C5 | TXNC51BHTUJ | **TXNC51BHTUE** | * |
| C6 | TXNC61BHTUJ | **TXNC61BHTUE** | * |
| SU | TXNSU1BHTUJ | **TXNSU1BHTUE** | * |
| SD | TXNSD1BHTUJ | **TXNSD1BHTUE** | * |
| SC | TXNSC1BHTUJ | **TXNSC1BHTUE** | * |
| SS | TXNSS1BHTUJ | **TXNSS1BHTUE** | * |
| SS2 | TNPA3829S | | |
| SS3 | TNPA3830S | | |
| P | ETXMM610MEF | | |

* Changed Parts No. only.

# 2 Service Hint

## 2.1. TH-42PX6U

Remove the Back Cover

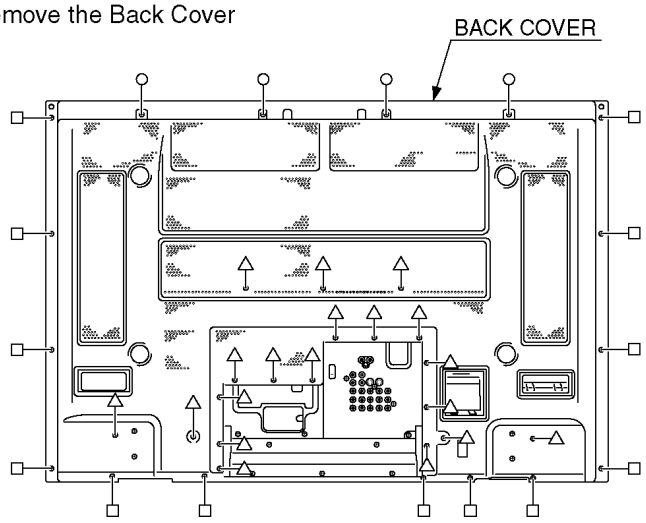


Remove:
4 screws (○) XYN4+F30FJK
13 screws (□) XTB4+12GFJK
19 screws (△) THEL0429

Service Position

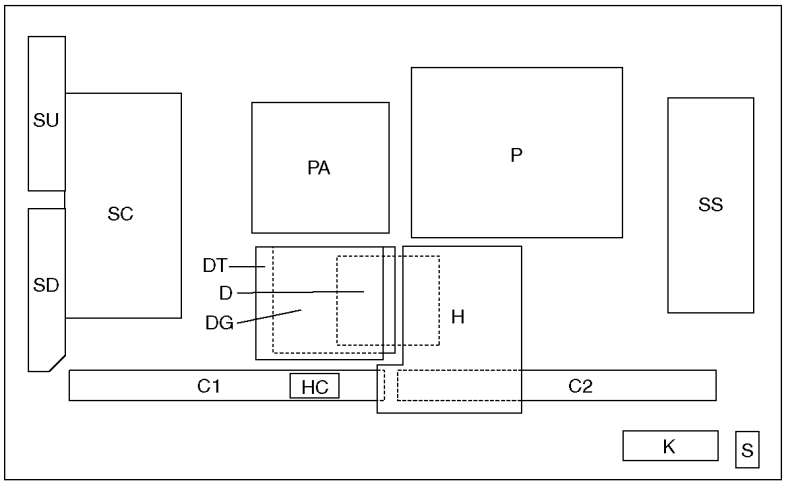


| Board Name | Function | Board Name | Function |
|---|---|---|---|
| P | Power Supply | C1 | Data Driver (Lower Right) |
| PA | DC-DC Converter, Speaker out, Audio AMP | C2 | Data Driver (Lower Left) |
| H | AV Terminal, AV Switch | SC | Scan Drive |
| DG | Digital Signal Processor, Micom, HDMI Interface | SU | Scan out (Upper) |
| DT | ATSC Interface | SD | Scan out (Lower) |
| D | Format Converter, Plasma AI, Sub-Field Processor | SS | Sustain Drive |
| HC | Jig Connection | K | Remote receiver, Power LED, Key Switch |
| | | S | Power Switch |

## 2.2. TH-50PX6U

Remove the Back Cover

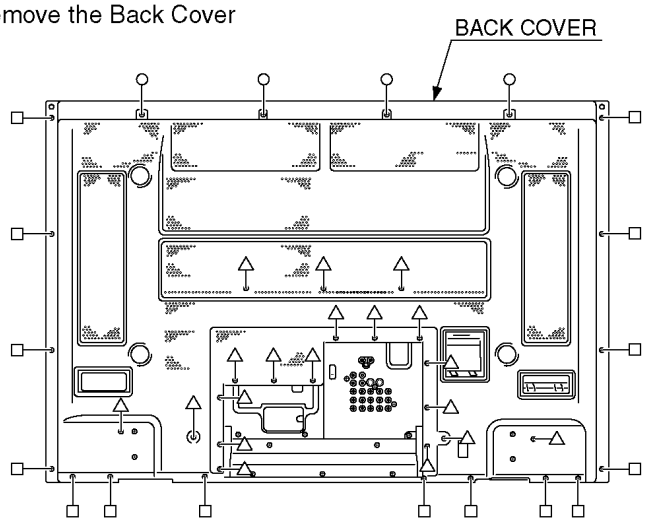


Remove:
4 screws (○) XYN4+F30FJK
15 screws (□) XTB4+12GFJK
19 screws (△) THEL0429

Service Position

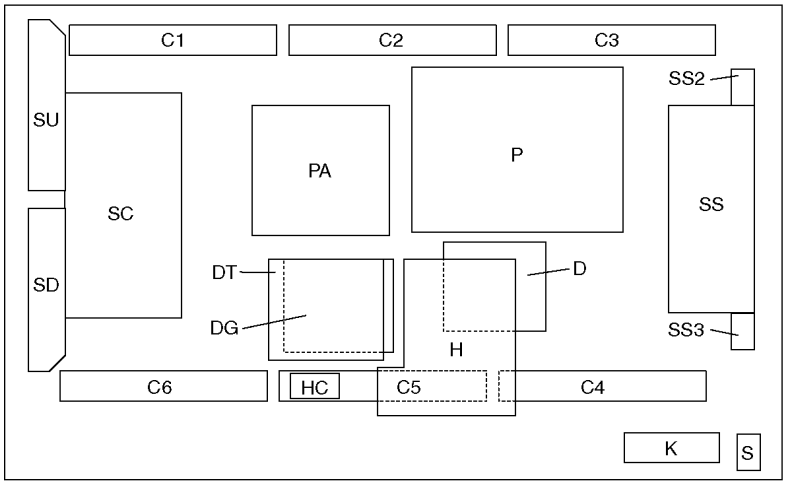


| Board Name | Function | Board Name | Function |
|---|---|---|---|
| P | Power Supply | C1 | Data Driver (Upper Right) |
| PA | DC-DC Converter<br>Speaker out, Audio AMP, Fan Control | C2 | Data Driver (Upper Center) |
| | | C3 | Data Driver (Upper Left) |
| H | AV Terminal, AV Switch | C4 | Data Driver (Lower Left) |
| DG | Digital Signal Processor, Micom, HDMI Interface | C5 | Data Driver (Lower Center) |
| DT | ATSC Interface | C6 | Data Driver (Lower Right) |
| D | Format Converter, Plasma AI, Sub-Field Processor | SC | Scan Drive |
| GS | SD Card Slot | SU | Scan out (Upper) |
| K | Remote receiver, Power LED, Key Switch | SD | Scan out (Lower) |
| S | Power Switch | SS | Sustain Drive |
| HC | Jig Connection | SS2 | Sustain Connector (Upper) |
| | | SS3 | Sustain Connector (Lower) |

# 3 Plasma panel replacement method

## 3.1. Remove the S-Board

1. Remove the screw (×2 ➡) and remove the S-Board unit.

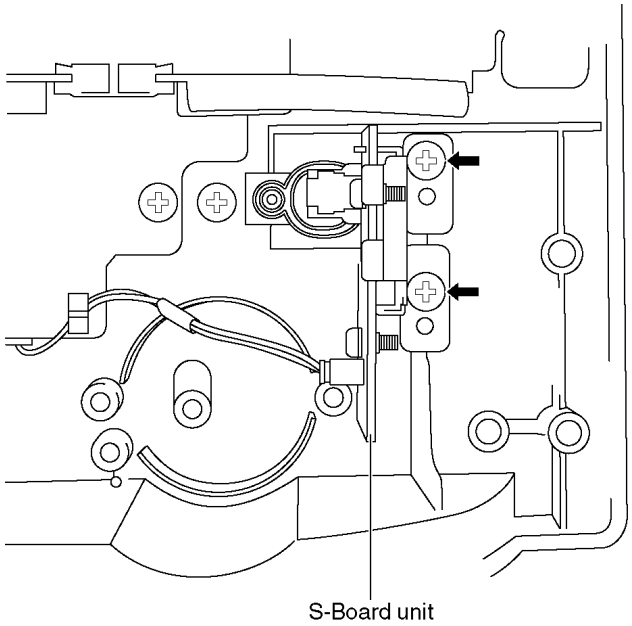


2. Unlock the cable clampers to free the cable.
3. Disconnect the coupler (S2).
4. Remove the screws (×2 ➡) and remove the S-Board.

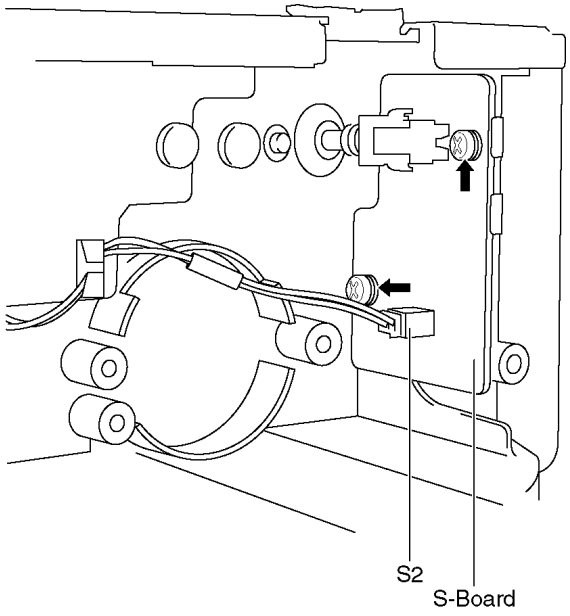


## 3.2. Remove the K-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the couplers (H53 and S2).
3. Remove the screws (×3 ➡) and remove the K-Board.

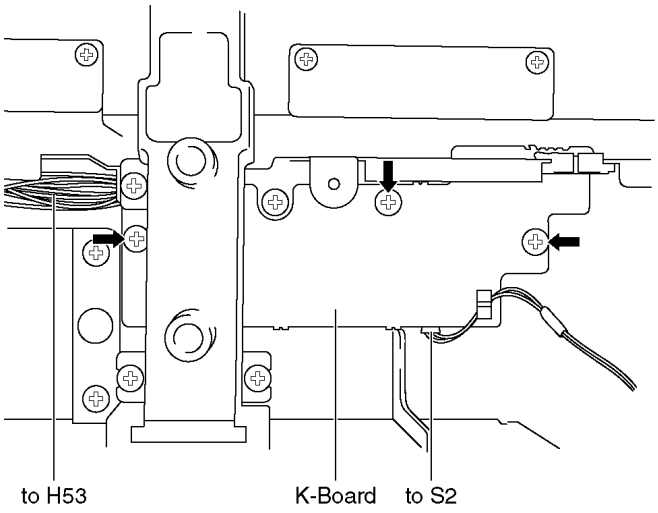

# 4 Location of Lead Wiring

## 4.1. Lead of Wiring (1)

The wire is dressed as shown in figure.

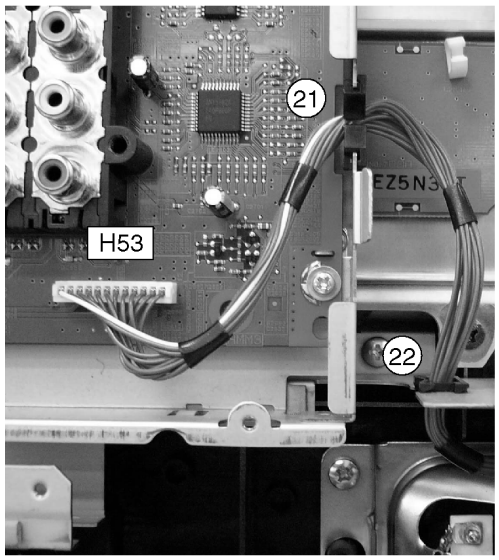


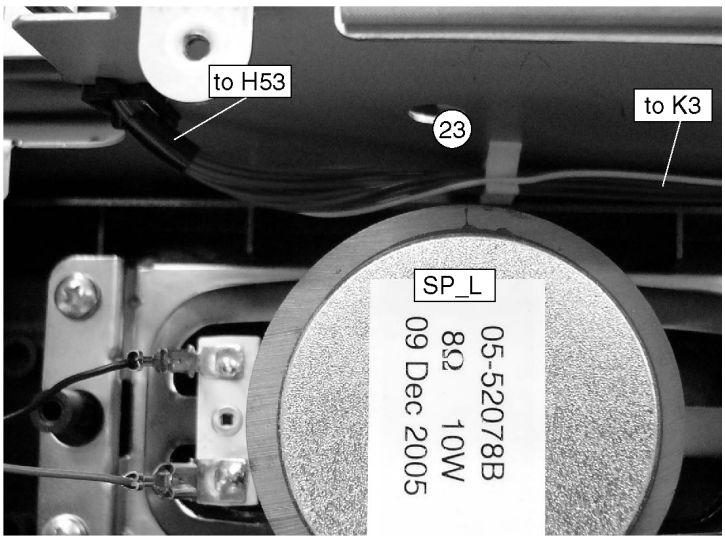


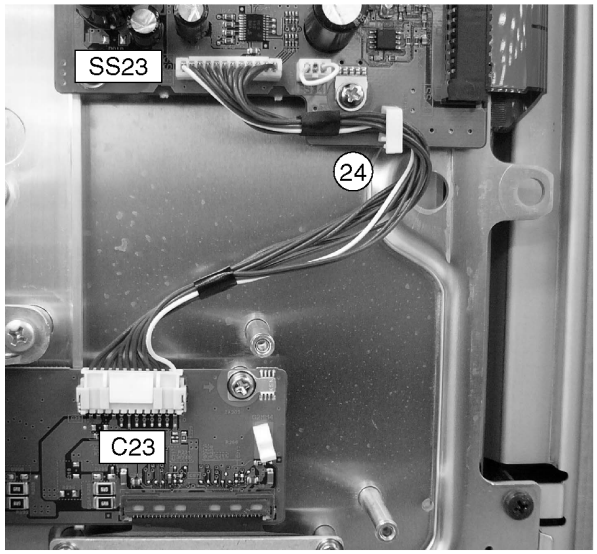


| Connector No. | 21 | 22 | 23 | 24 |
|---|---|---|---|---|
| H53 - K3 | O | O | O | |
| C23 - SS23 | | | | O |

## 4.2. Lead of Wiring (2)

The wire is dressed as shown in figure.

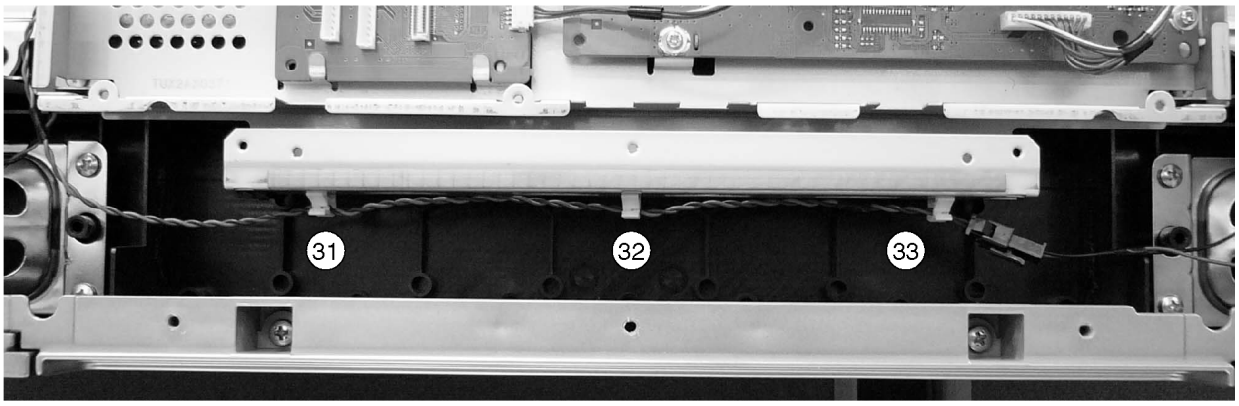


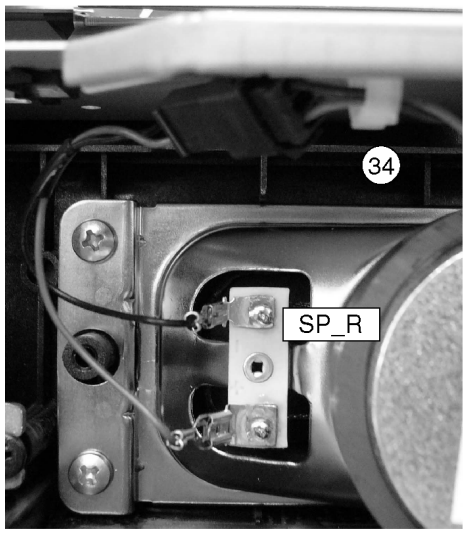


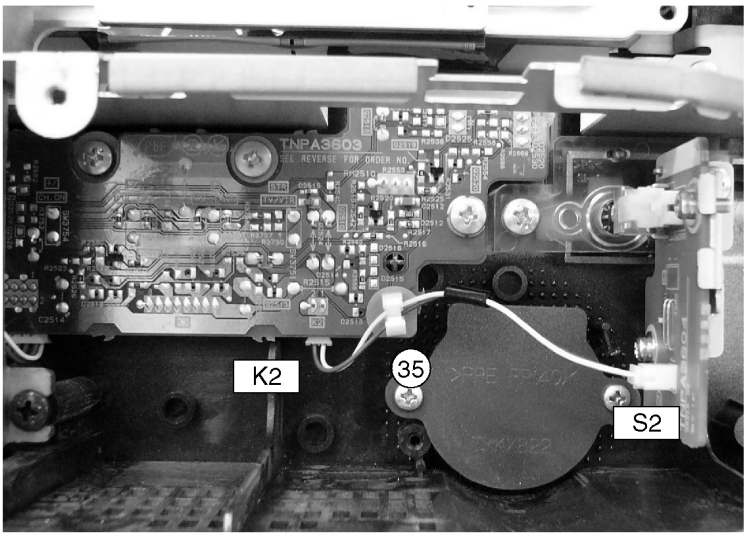


| Connector No. | 31 | 32 | 33 | 34 | 35 |
|---|---|---|---|---|---|
| PA2 - RELAY | O | O | O | O | |
| K2 - S2 | | | | | O |

NOTE

# 5 Conductor Views

## 5.1. H-Board

**H-BOARD (FOIL SIDE)**
**TNPA3769ABE**

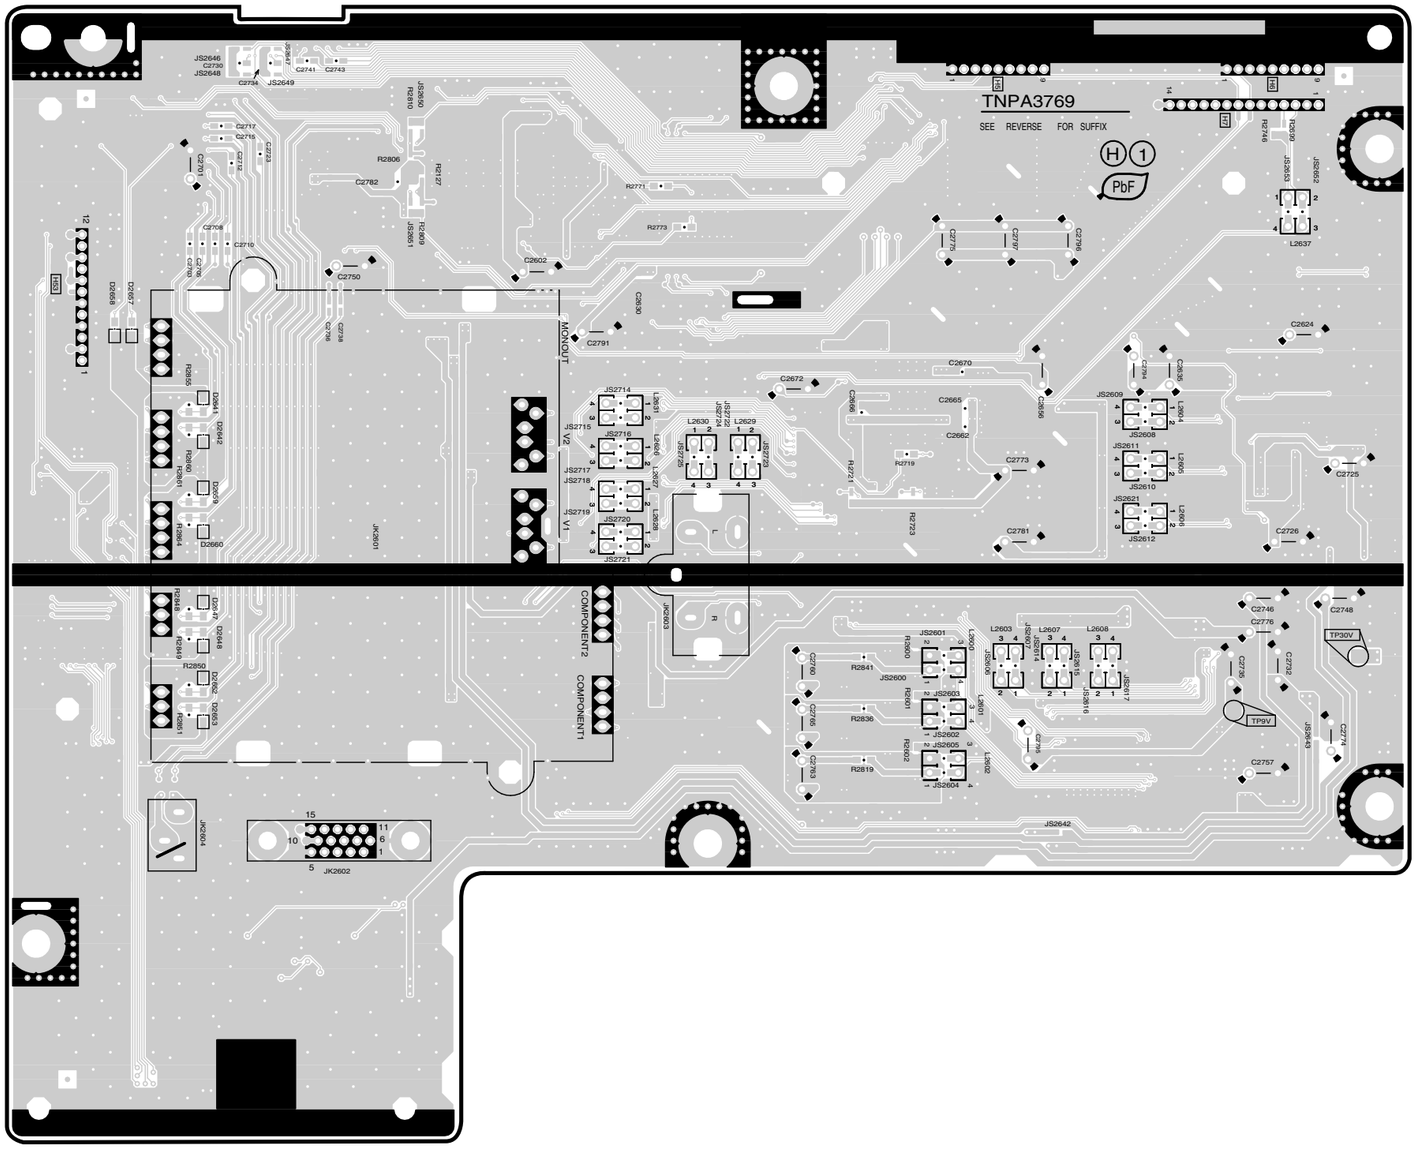


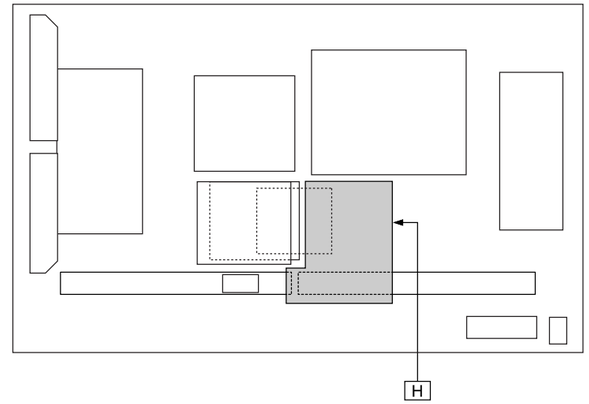


**Parts Location**

| H-BOARD (FOIL SIDE) | |
|---|---|
| **TP** | |
| TP9V<br>TP30V | F-3<br>G-3 |

TH-42/50PX6U
H-BOARD TNPA3769ABE

TH-42/50PX6U
H-BOARD TNPA3769ABE

## H-BOARD (COMPONENT SIDE)
## TNPA3769ABE

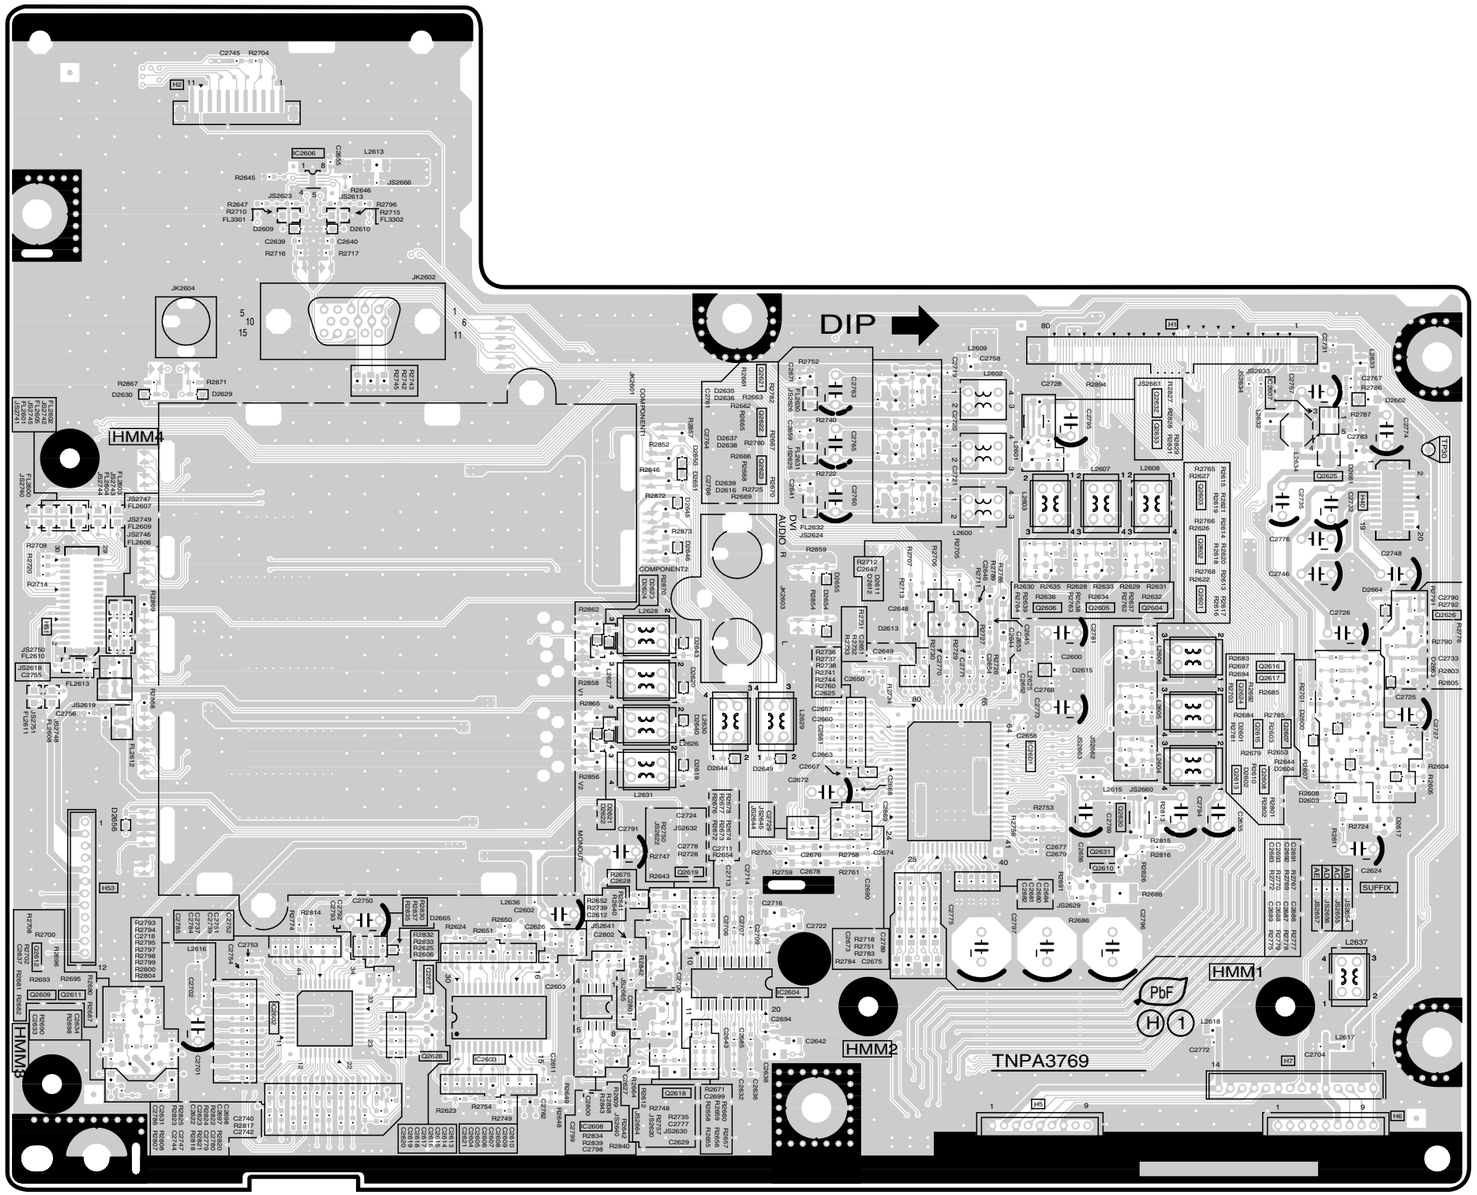


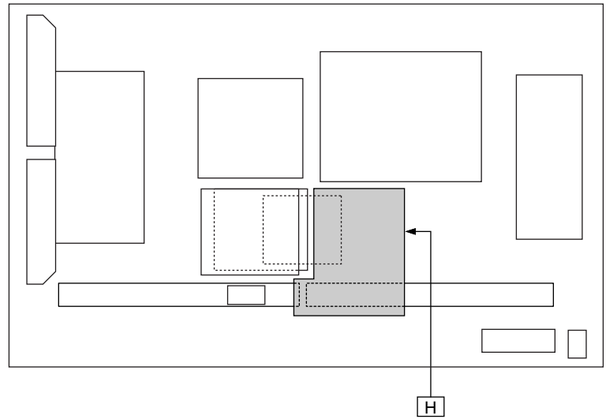


### Parts Location

| H-BOARD (COMPONENT SIDE) | | | |
|---|---|---|---|
| **IC** | | Q2616 | F-3 |
| IC2601 | E-3 | Q2617 | F-3 |
| IC2602 | B-2 | Q2618 | C-1 |
| IC2603 | C-2 | Q2619 | D-2 |
| IC2604 | D-2 | Q2621 | D-4 |
| IC2606 | B-5 | Q2622 | D-4 |
| IC2607 | F-4 | Q2623 | D-4 |
| IC2608 | C-2 | Q2624 | F-3 |
| **TRANSISTOR** | | Q2625 | F-4 |
| Q2601 | F-3 | Q2626 | G-3 |
| Q2602 | F-4 | Q2627 | B-2 |
| Q2603 | F-4 | Q2628 | B-2 |
| Q2604 | E-4 | Q2630 | E-3 |
| Q2605 | E-3 | Q2631 | E-2 |
| Q2606 | E-3 | Q2632 | E-4 |
| Q2607 | E-3 | Q2633 | E-4 |
| Q2608 | E-3 | **TP** | |
| Q2609 | A-2 | TP30 | G-4 |
| Q2610 | E-2 | | |
| Q2611 | A-2 | | |
| Q2612 | A-2 | | |
| Q2613 | F-3 | | |
| Q2615 | F-3 | | |

TH-42/50PX6U
H-BOARD TNPA3769ABE

TH-42/50PX6U
H-BOARD TNPA3769ABE

## 5.2. K and S-Board

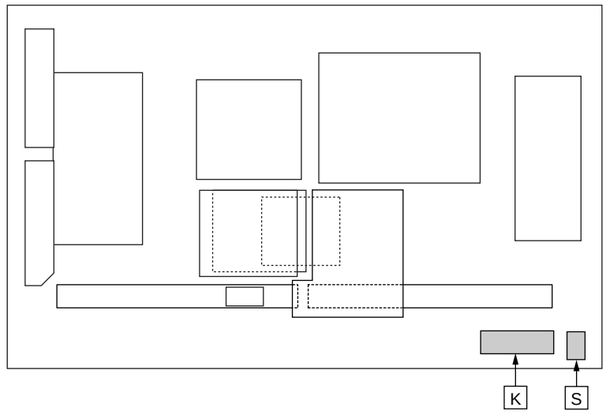


**S-BOARD (FOIL SIDE)**
**TNPA3604ACS**




**S-BOARD (COMPONENT SIDE)**
**TNPA3604ACS**




**K-BOARD (FOIL SIDE)**
**TNPA3603AES**

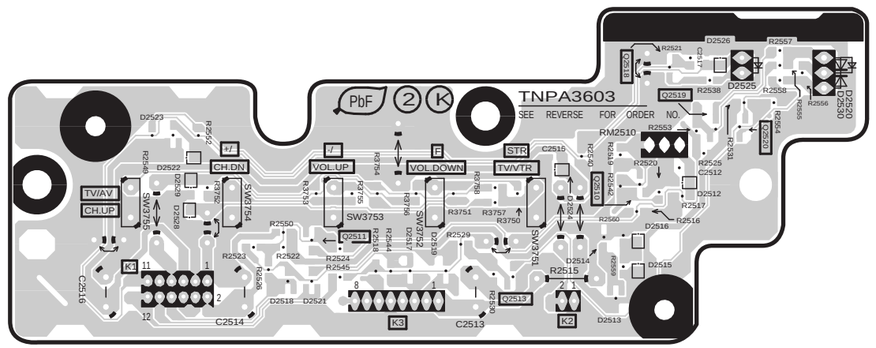


**K-BOARD (COMPONENT SIDE)**
**TNPA3603AES**

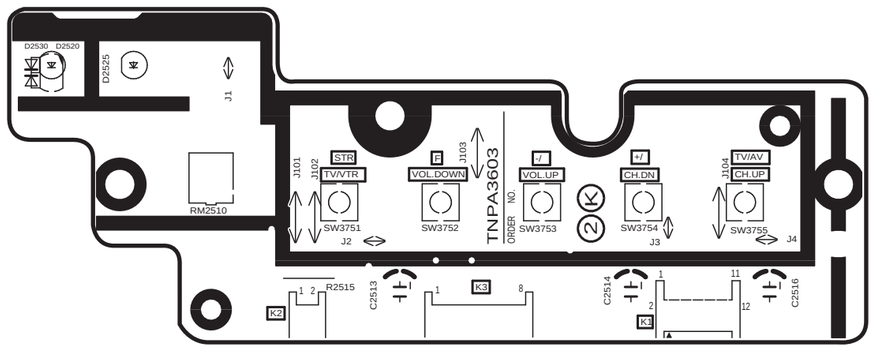


TH-42/50PX6U
K-BOARD TNPA3603AES
S-BOARD TNPA3604ACS

TH-42/50PX6U
K-BOARD TNPA3603AES
S-BOARD TNPA3604ACS

## 5.3. DG-Board

**DG-BOARD (FOIL SIDE)**
**TNPA3903BGS (42inch)**
**TNPA3903BHS (50inch)**

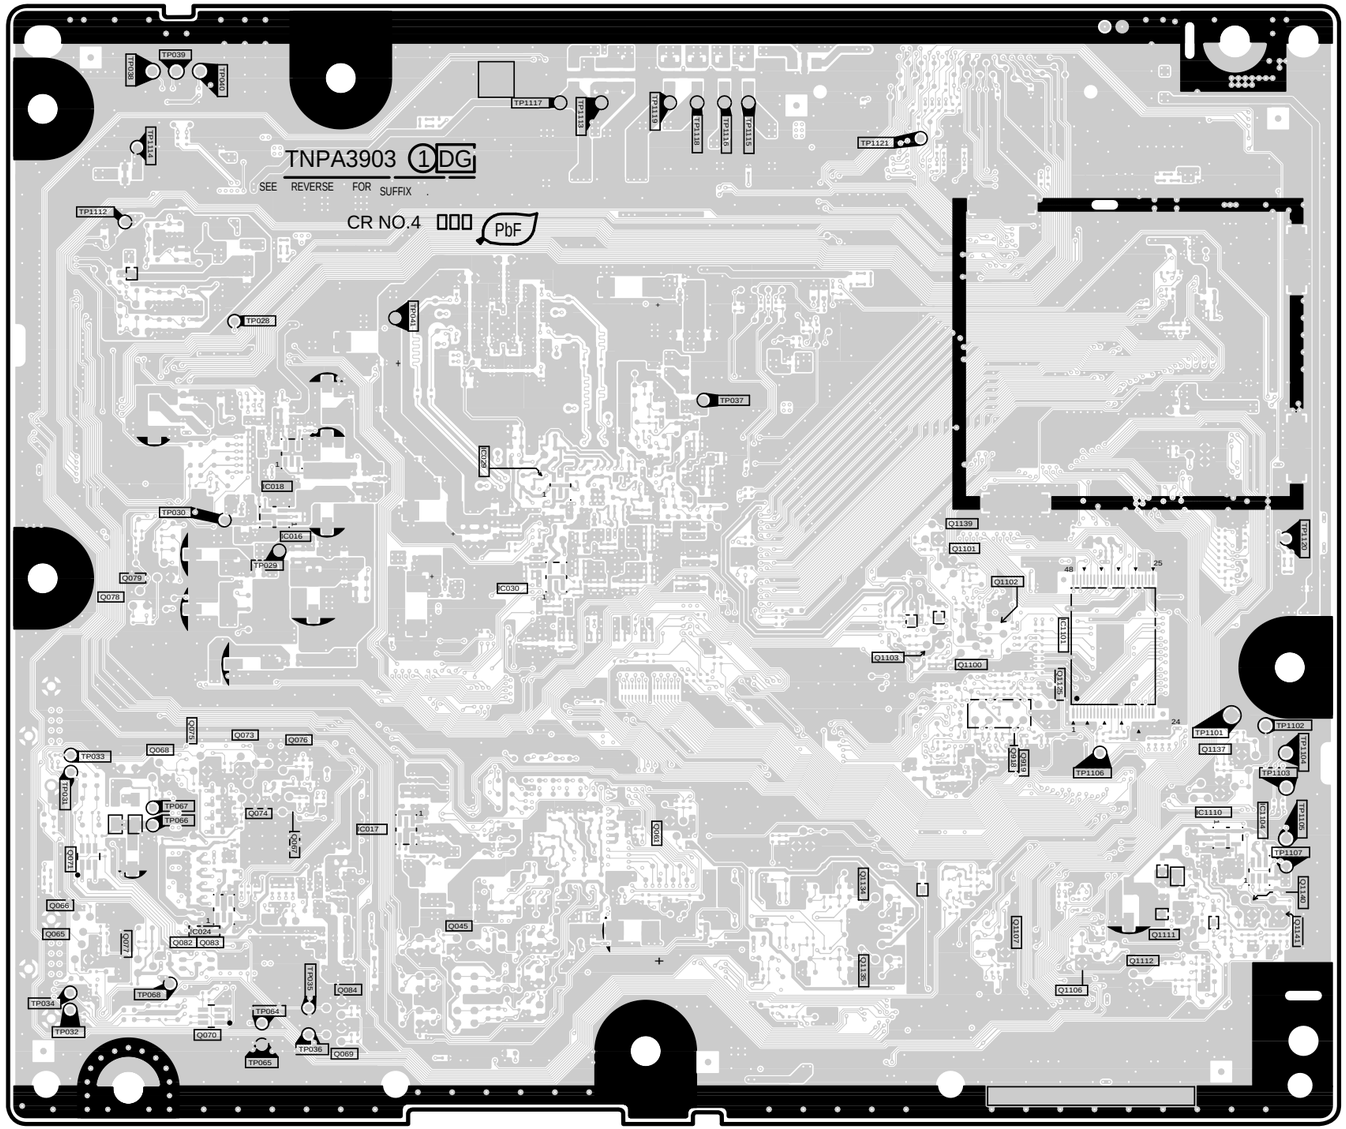


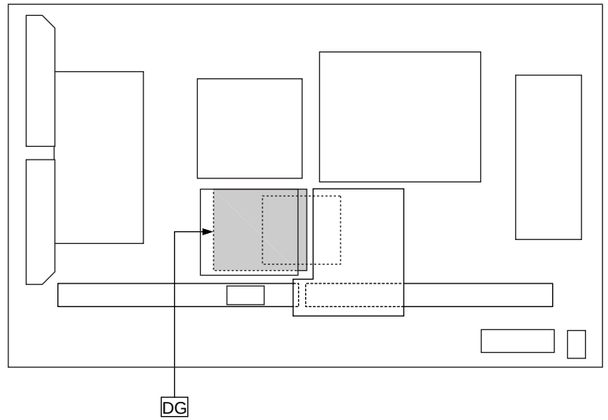


**Parts Location**

| DG-BOARD (FOIL SIDE) | | | | | |
|---|---|---|---|---|---|
| **IC** | | **TRANSISTOR** | | **TP** | |
| IC1101 | E-3 | Q1100 | E-3 | TP1101 | F-3 |
| IC1104 | F-2 | Q1101 | E-3 | TP1102 | F-3 |
| IC1110 | F-2 | Q1102 | E-3 | TP1103 | F-2 |
| IC4016 | B-3 | Q1103 | E-3 | TP1104 | F-3 |
| IC4017 | B-2 | Q1106 | E-2 | TP1105 | F-2 |
| IC4018 | B-4 | Q1107 | E-2 | TP1106 | F-2 |
| IC4024 | B-2 | Q1111 | F-2 | TP1107 | F-2 |
| IC4029 | C-4 | Q1112 | F-2 | TP1112 | A-5 |
| IC4030 | C-3 | Q1125 | E-3 | TP1113 | C-5 |
| | | Q1134 | D-2 | TP1114 | A-5 |
| | | Q1135 | D-2 | TP1115 | D-5 |
| | | Q1137 | F-3 | TP1116 | D-5 |
| | | Q1139 | E-4 | TP1117 | C-5 |
| | | Q1140 | F-2 | TP1118 | D-5 |
| | | Q1141 | F-2 | TP1119 | D-5 |
| | | Q4045 | C-2 | TP1120 | F-3 |
| | | Q4061 | D-2 | TP1121 | D-5 |
| | | Q4065 | A-2 | TP4028 | B-4 |
| | | Q4066 | A-2 | TP4029 | B-3 |
| | | Q4067 | B-2 | TP4030 | B-4 |
| | | Q4068 | A-3 | TP4031 | A-2 |
| | | Q4069 | B-1 | TP4032 | A-1 |
| | | Q4070 | B-1 | TP4033 | A-3 |
| | | Q4071 | A-2 | TP4034 | A-1 |
| | | Q4073 | B-3 | TP4035 | B-2 |
| | | Q4074 | B-2 | TP4036 | B-1 |
| | | Q4075 | A-2 | TP4037 | D-4 |
| | | Q4076 | B-3 | TP4038 | A-5 |
| | | Q4077 | A-2 | TP4039 | B-5 |
| | | Q4078 | A-3 | TP4040 | B-5 |
| | | Q4079 | A-3 | TP4041 | C-4 |
| | | Q4082 | B-2 | TP4064 | B-1 |
| | | Q4083 | B-2 | TP4065 | B-1 |
| | | Q4084 | B-2 | TP4066 | B-2 |
| | | Q4918 | E-3 | TP4067 | B-2 |
| | | Q4919 | E-3 | TP4068 | A-2 |

TH-42PX6U
DG-BOARD TNPA3903BGS

TH-50PX6U
DG-BOARD TNPA3903BHS

TH-42PX6U
DG-BOARD TNPA3903BGS

TH-50PX6U
DG-BOARD TNPA3903BHS

## DG-BOARD (COMPONENT SIDE)
## TNPA3903BGS (42inch)
## TNPA3903BHS (50inch)

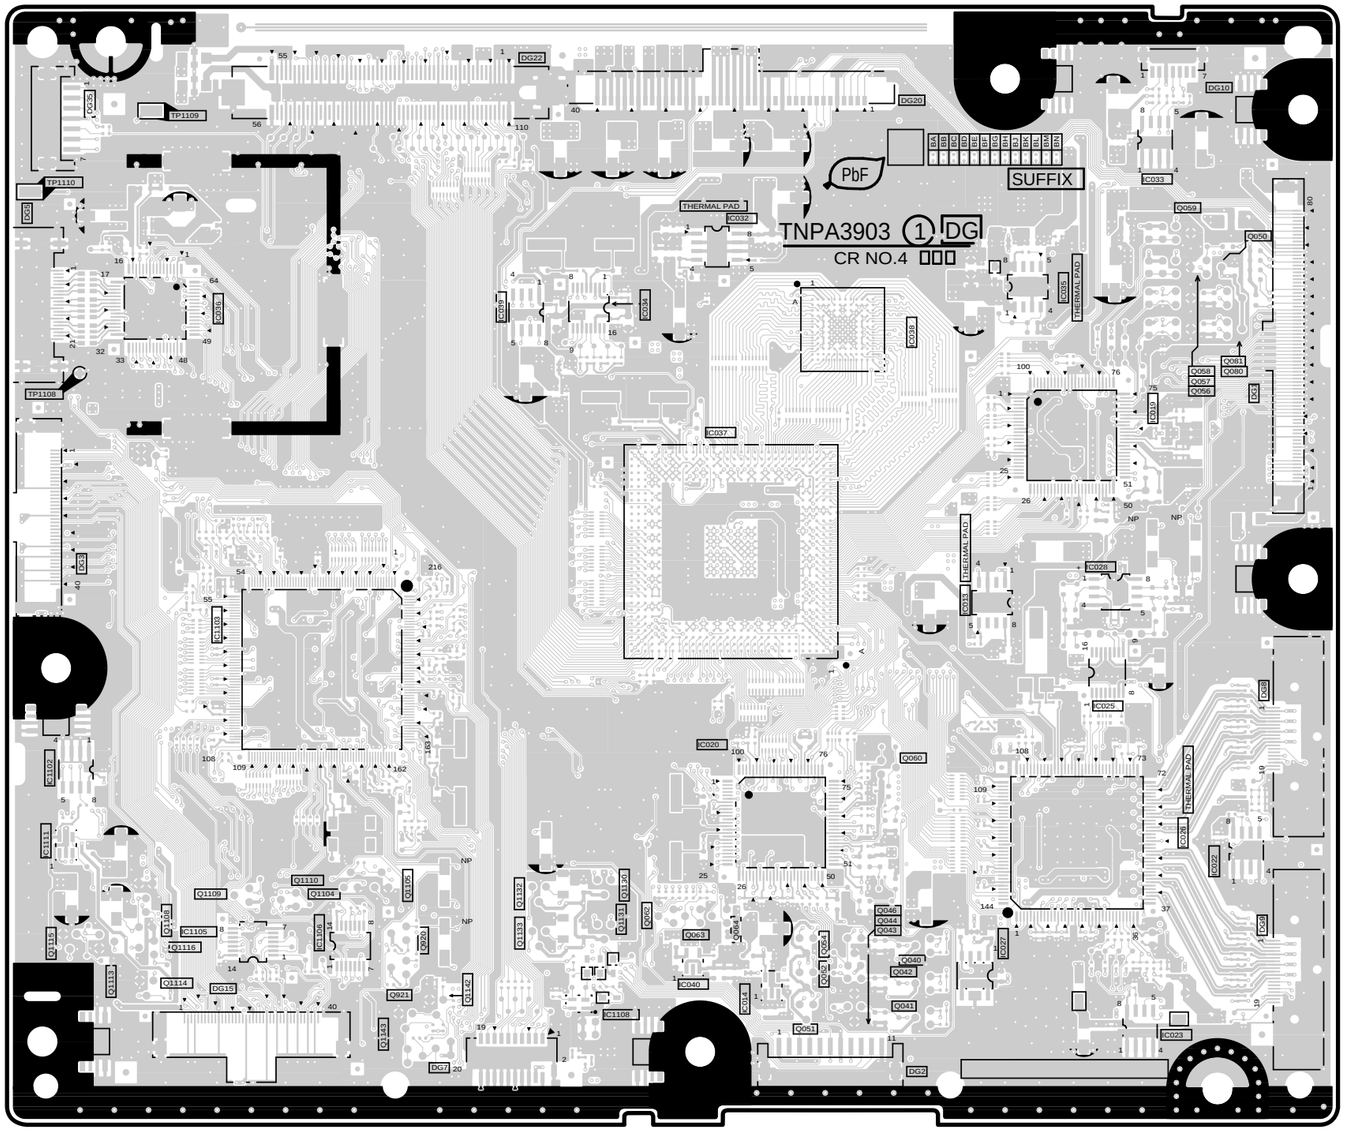

## 5.4. DT-Board

### DT-BOARD (FOIL SIDE)
### TNAG170S

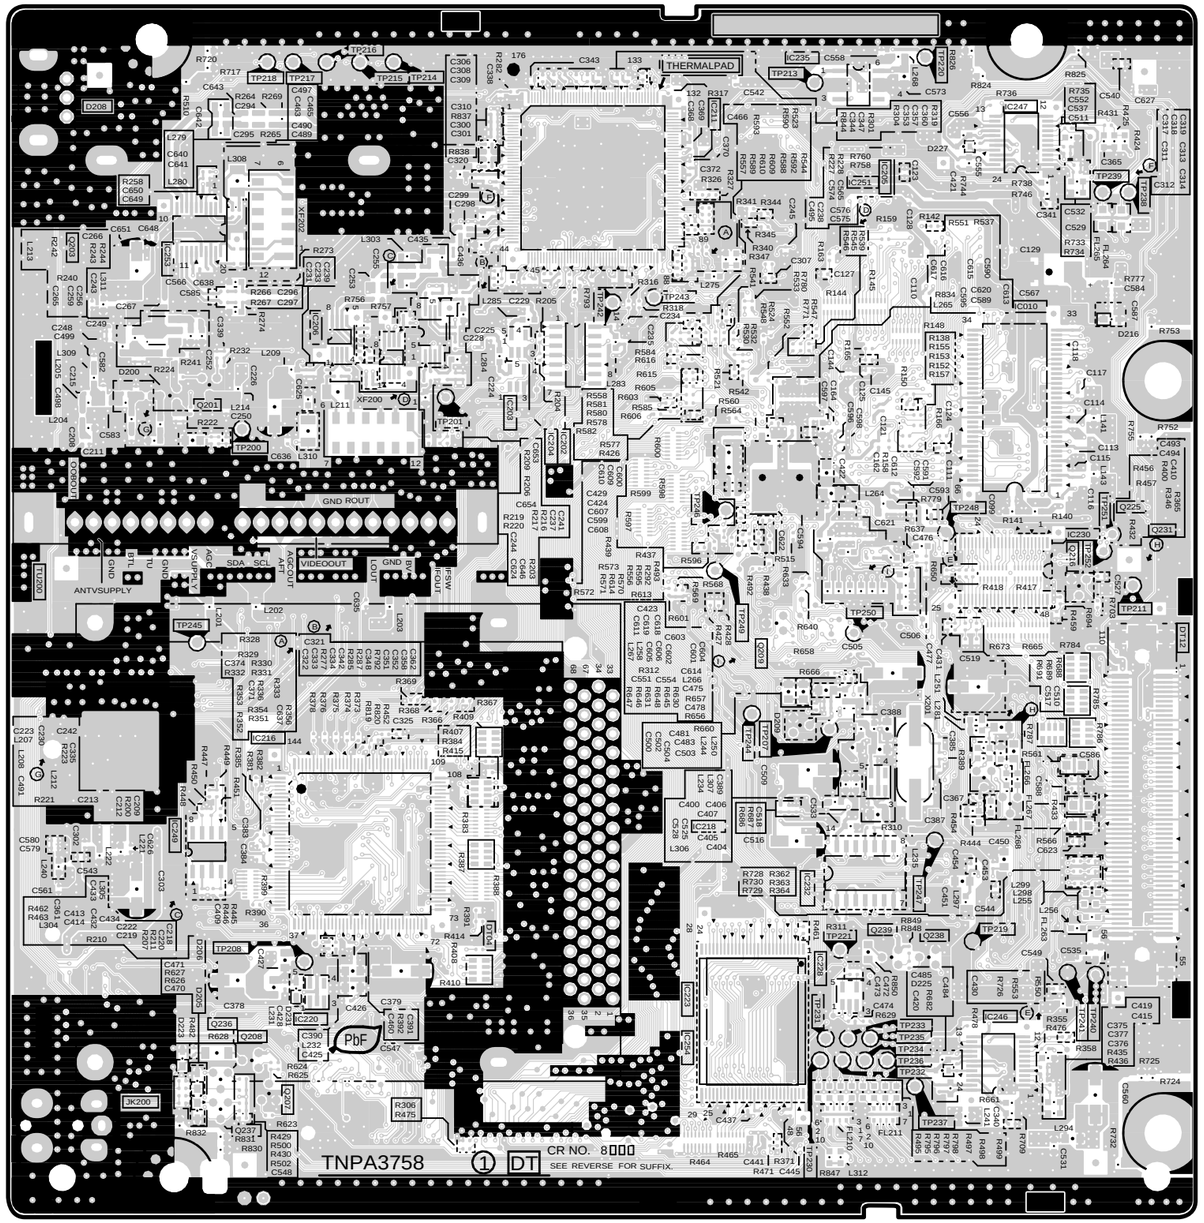


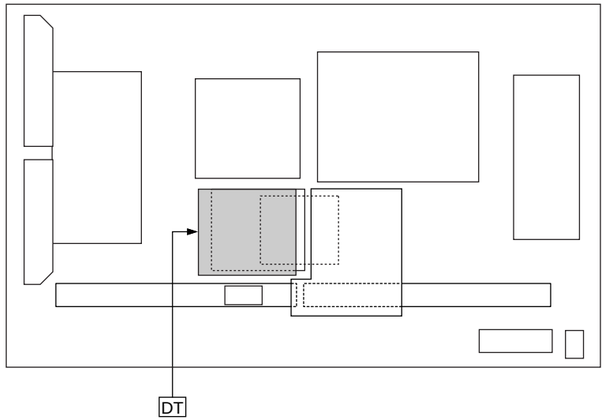


### Parts Location

**DT-BOARD (FOIL SIDE)**

| IC | | TRANSISTOR | | | |
|---|---|---|---|---|---|
| IC8202 | C-4 | Q8201 | B-4 | TP8221 | D-2 |
| IC8203 | C-4 | Q8203 | A-5 | TP8230 | D-1 |
| IC8204 | C-4 | Q8207 | B-1 | TP8231 | D-2 |
| IC8205 | E-5 | Q8208 | B-2 | TP8232 | E-2 |
| IC8206 | B-5 | Q8209 | D-3 | TP8233 | E-2 |
| IC8211 | D-6 | Q8216 | E-4 | TP8234 | E-2 |
| IC8216 | B-3 | Q8225 | F-4 | TP8235 | E-2 |
| IC8218 | D-3 | Q8231 | F-4 | TP8236 | E-2 |
| IC8220 | B-2 | Q8236 | B-2 | TP8237 | E-2 |
| IC8223 | D-2 | Q8237 | B-1 | TP8238 | F-5 |
| IC8228 | D-2 | Q8238 | E-2 | TP8239 | E-5 |
| IC8230 | E-4 | Q8239 | E-2 | TP8240 | E-2 |
| IC8232 | D-2 | TP | | TP8241 | E-2 |
| IC8235 | D-6 | TP8200 | B-4 | TP8242 | C-5 |
| IC8246 | E-2 | TP8201 | C-4 | TP8243 | D-5 |
| IC8247 | E-6 | TP8207 | D-3 | TP8244 | D-3 |
| IC8249 | B-3 | TP8208 | B-2 | TP8245 | B-3 |
| IC8251 | D-5 | TP8211 | F-4 | TP8246 | D-4 |
| IC8253 | B-5 | TP8213 | D-6 | TP8247 | E-2 |
| IC8254 | D-2 | TP8214 | C-6 | TP8248 | E-4 |
| IC8010 | E-5 | TP8215 | B-6 | TP8249 | D-4 |
| | | TP8216 | B-6 | TP8250 | D-4 |
| | | TP8217 | B-6 | TP8251 | E-4 |
| | | TP8218 | B-6 | TP8252 | E-4 |
| | | TP8219 | E-2 | | |
| | | TP8220 | E-6 | | |

## DT-BOARD (COMPONENT SIDE)
## TNAG170S

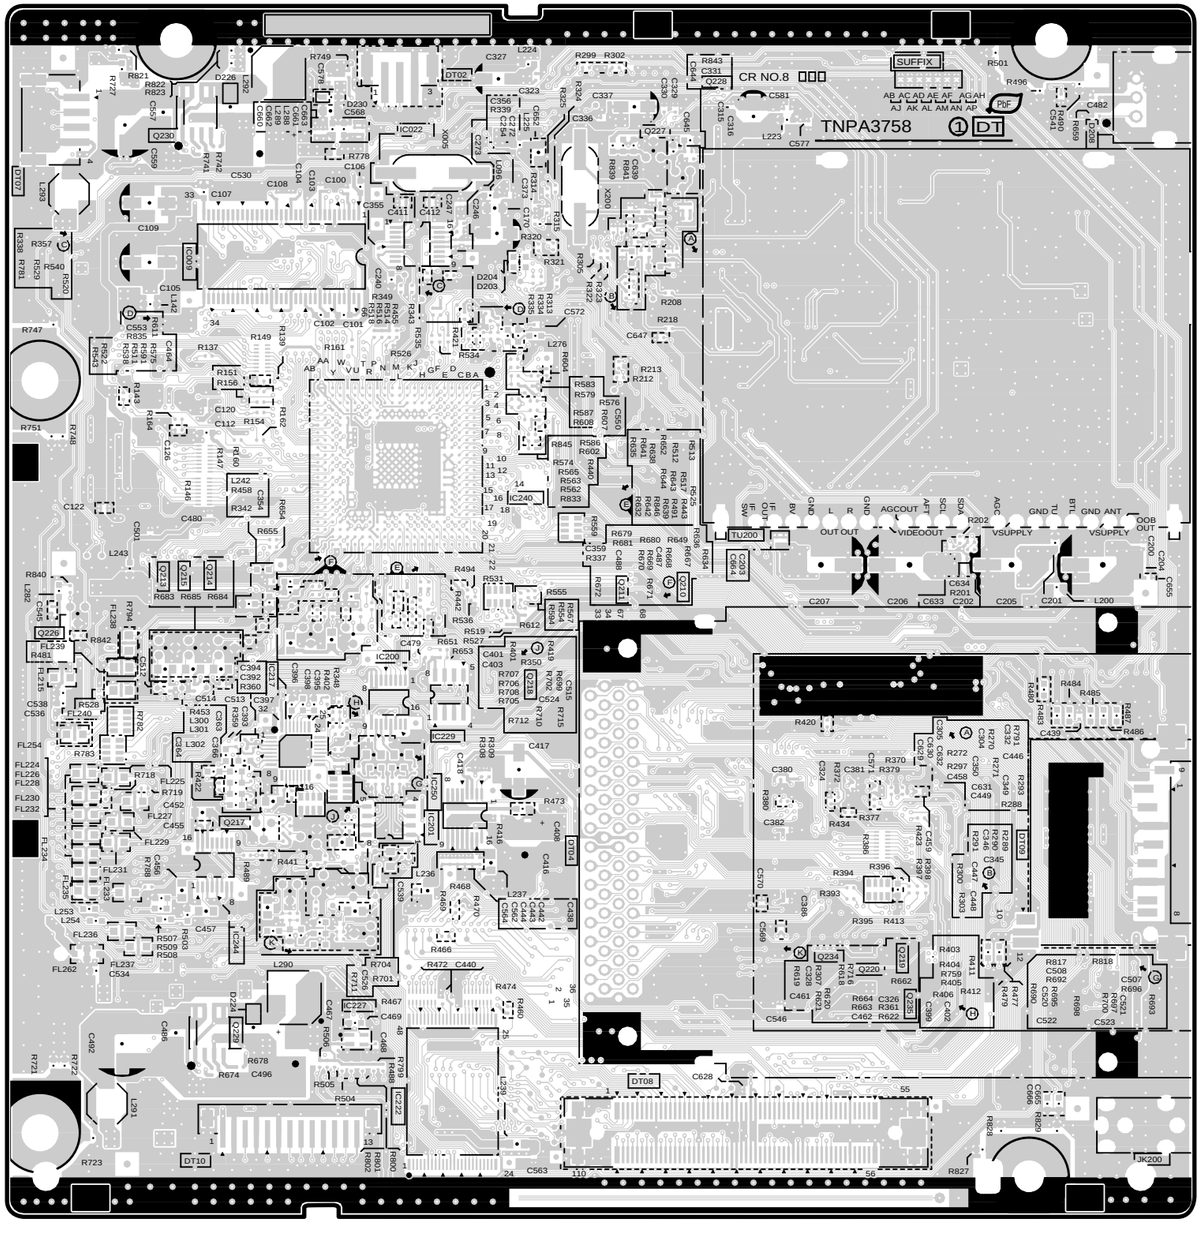


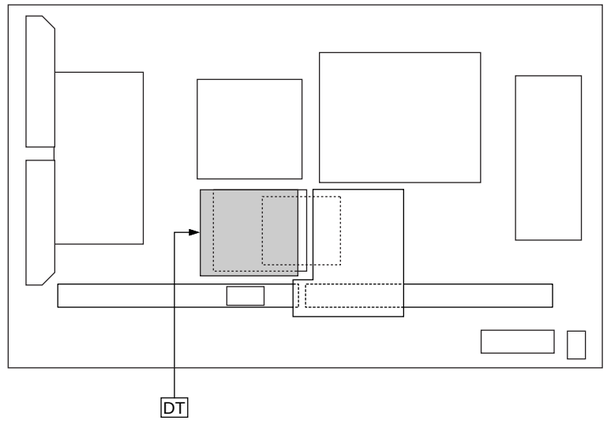


### Parts Location

| DT-BOARD (COMPONENT SIDE) | | | |
|---|---|---|---|
| **IC** | | **TRANSISTOR** | |
| IC8200 | B-3 | Q8210 | D-4 |
| IC8201 | C-3 | Q8211 | C-4 |
| IC8217 | B-3 | Q8213 | B-4 |
| IC8222 | C-1 | Q8214 | B-4 |
| IC8227 | B-2 | Q8215 | B-4 |
| IC8229 | C-3 | Q8217 | B-3 |
| IC8240 | C-4 | Q8218 | C-3 |
| IC8244 | B-2 | Q8219 | E-2 |
| IC8250 | C-3 | Q8220 | D-2 |
| IC8009 | B-5 | Q8226 | A-3 |
| IC8022 | C-6 | Q8227 | D-6 |
| | | Q8228 | D-6 |
| | | Q8229 | B-2 |
| | | Q8230 | B-6 |
| | | Q8234 | D-2 |
| | | Q8235 | E-2 |

TH-42/50PX6U
DT-BOARD TNAG170S

TH-42/50PX6U
DT-BOARD TNAG170S

NOTE

# 6 Schematic and Block Diagram

## 6.1. Schematic Diagram Note

**Important Safety Notice**

Components identified by ⚠ mark have special characteristics important for safety.
When replacing any of these components, use only manufacture's specified parts.

**Notes:**

1. **Resistor**
   Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
2. **Capacitor**
   Unit of capacitance is μF, unless otherwise noted.
3. Coil
   Unit of inductance is H, unless otherwise noted.
4. Test Point
   ⚲ : Test Point position
5. Earth Symbol
   ⏚ : Chassis Earth (Cold) ⏚ : Line Earth (Hot)
6. Voltage Measurement
   Voltage is measured by a DC voltmeter.
   Conditions of the measurement are the following:
   Power Source ..... AC120V, 50/60Hz
   Receiving Signal ..... Colour Bar signal (RF)
   All customer's controls ..... Maximum positions
7. When arrow mark ( ↗ ) is found, connection is easily found from the direction of arrow.
8. Indicates the major signal flow. : Video ➡ Audio ⇨
9. This schematic diagram is the latest at the time of printing and subject to change without notice.

**Remarks:**

1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
   The circuit is defined by HOT and COLD indications in the schematic diagram. Take the follwing precautions.
   All circuits, except the Power Circuit, are cold.
   Precautions
   a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
   b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
   c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
      Connect the earth of instruments to the earth connection of the circuit being measured.
   d. Make sure to disconnect the power plug before removing the chassis.

## 6.2. Main Block Diagram (42inch)

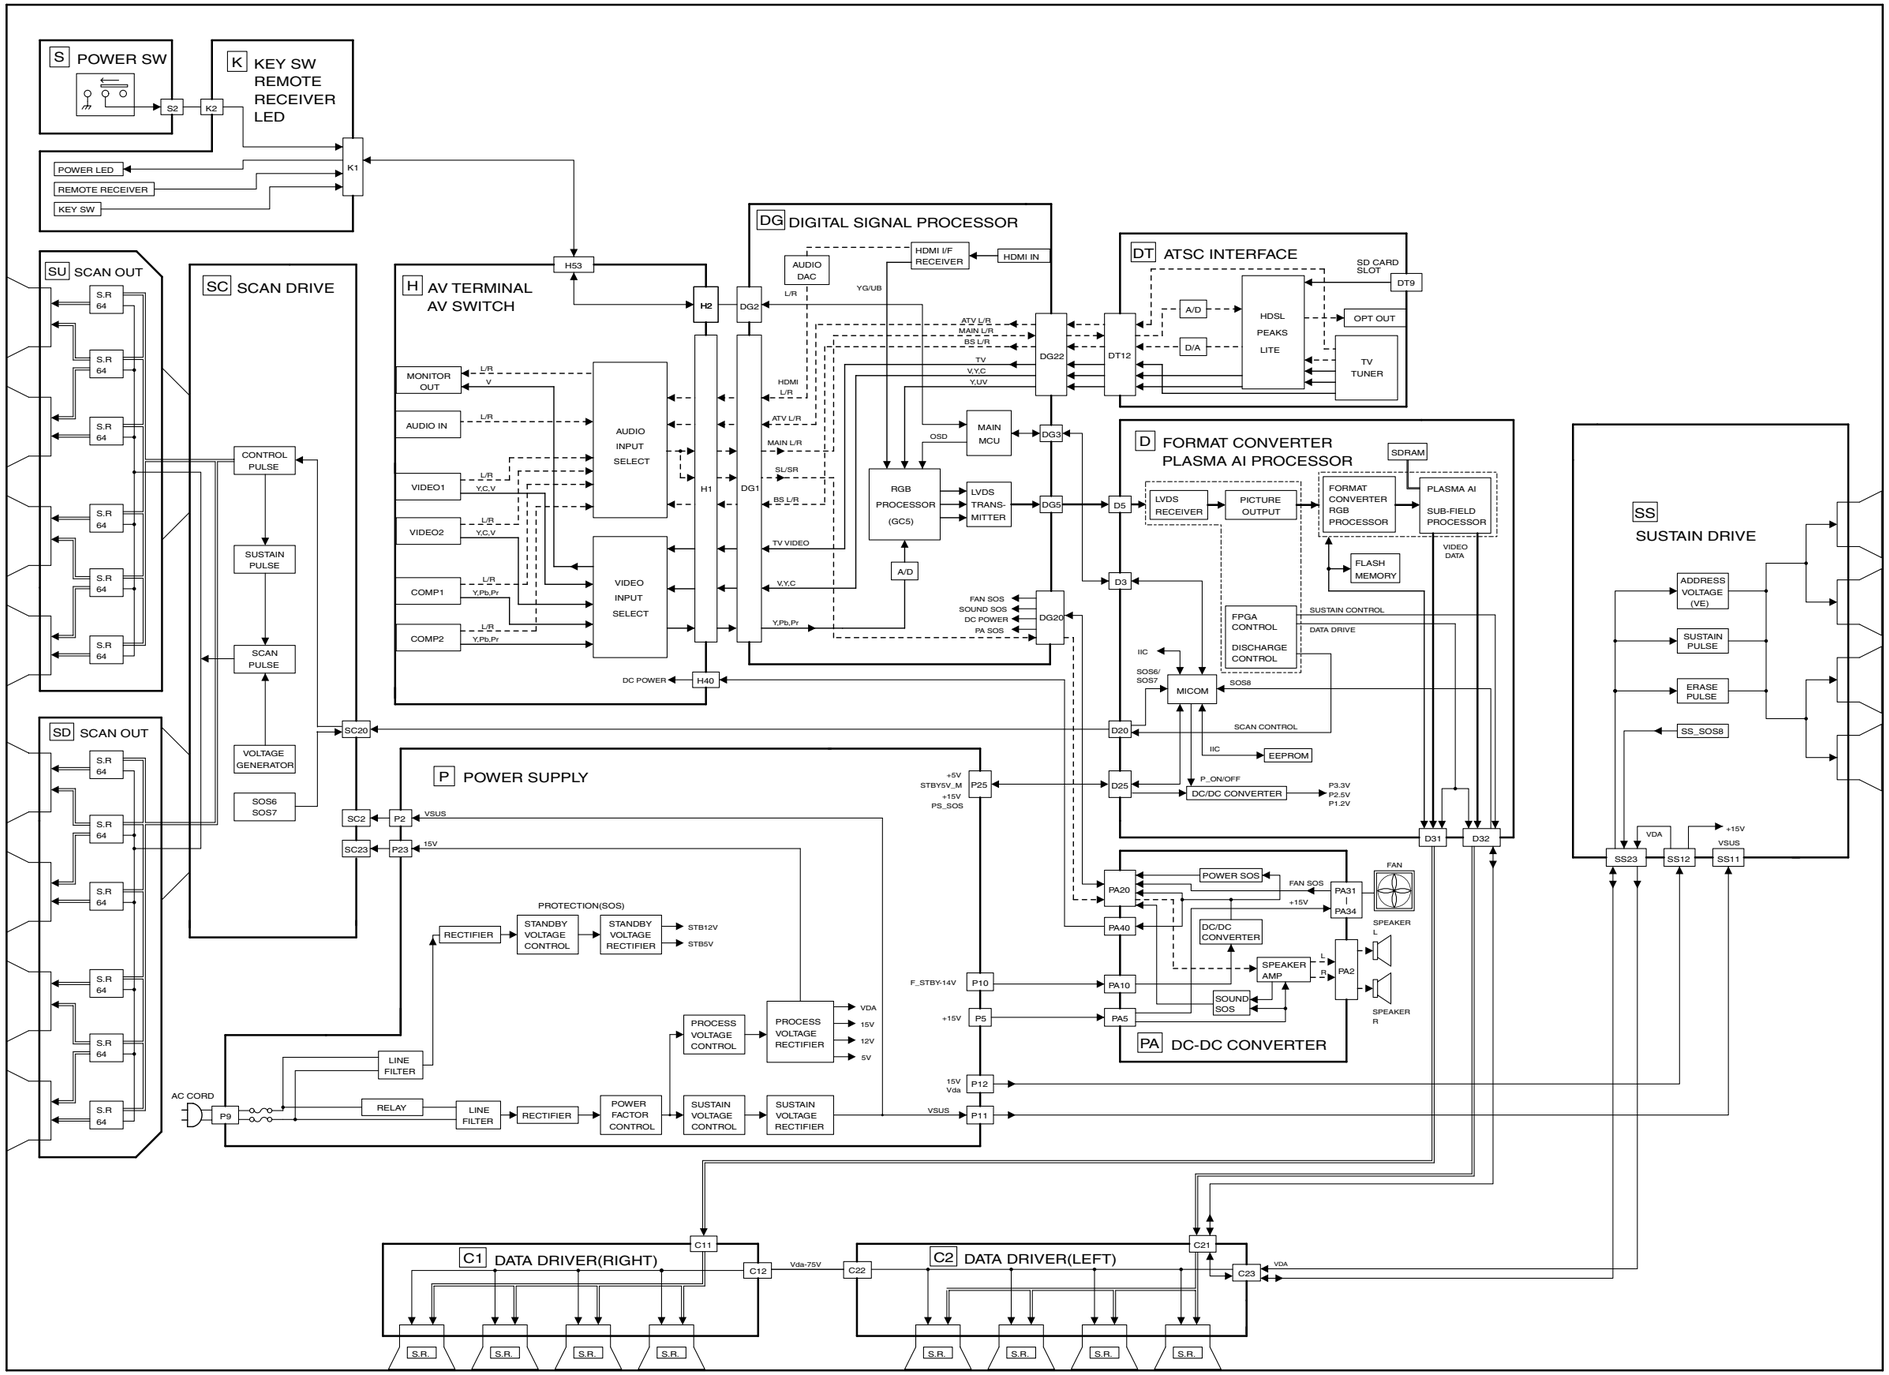


TH-42PX6U
Main Block Diagram

TH-42PX6U
Main Block Diagram

## 6.3. Main Block Diagram (50inch)

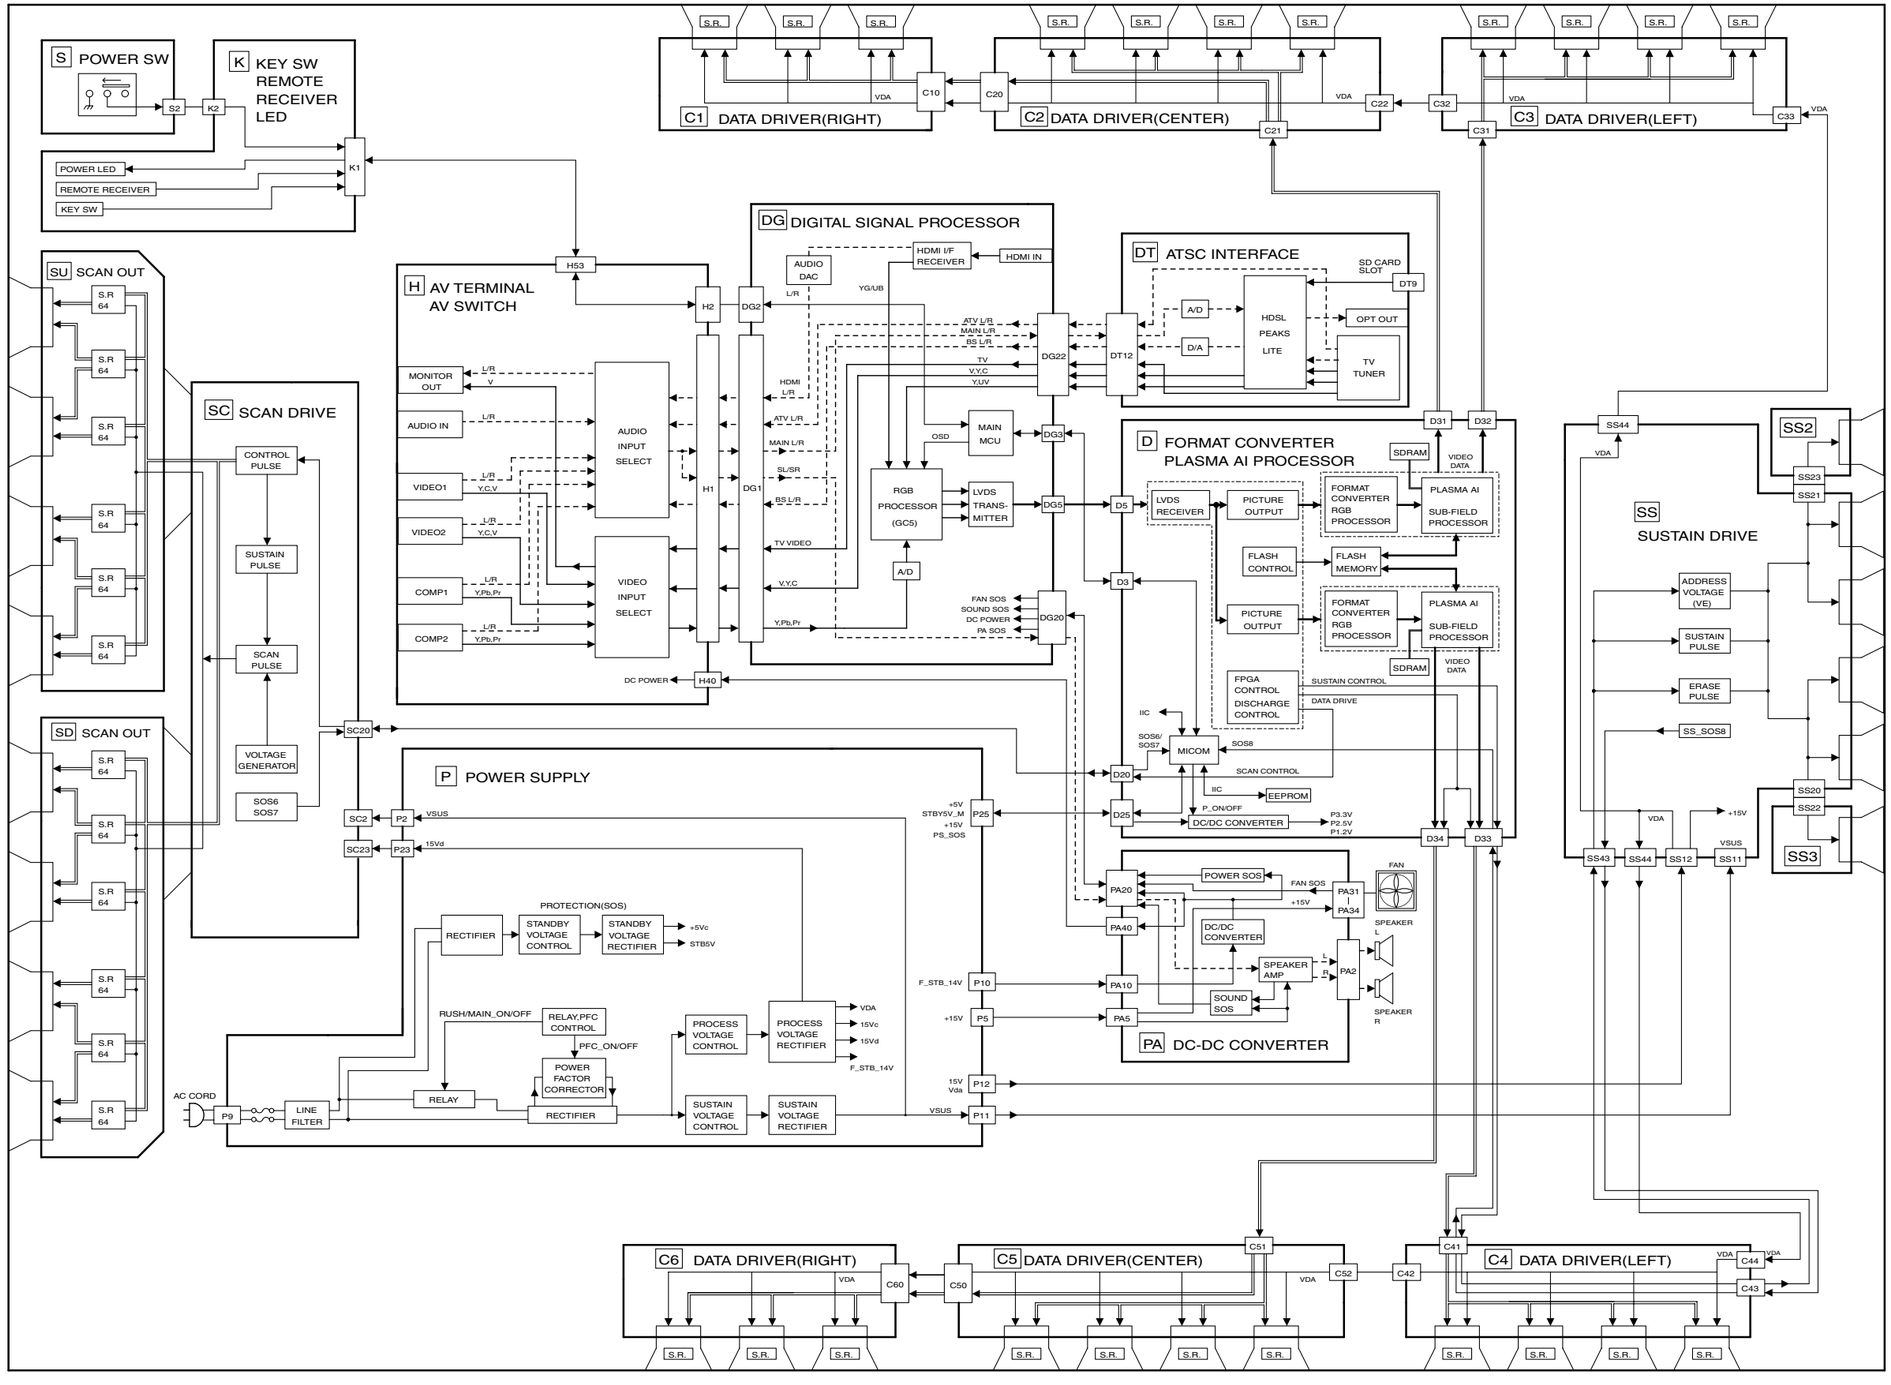


TH-50PX6U
Main Block Diagram

TH-50PX6U
Main Block Diagram

# 6.4. H-Board Block Diagram

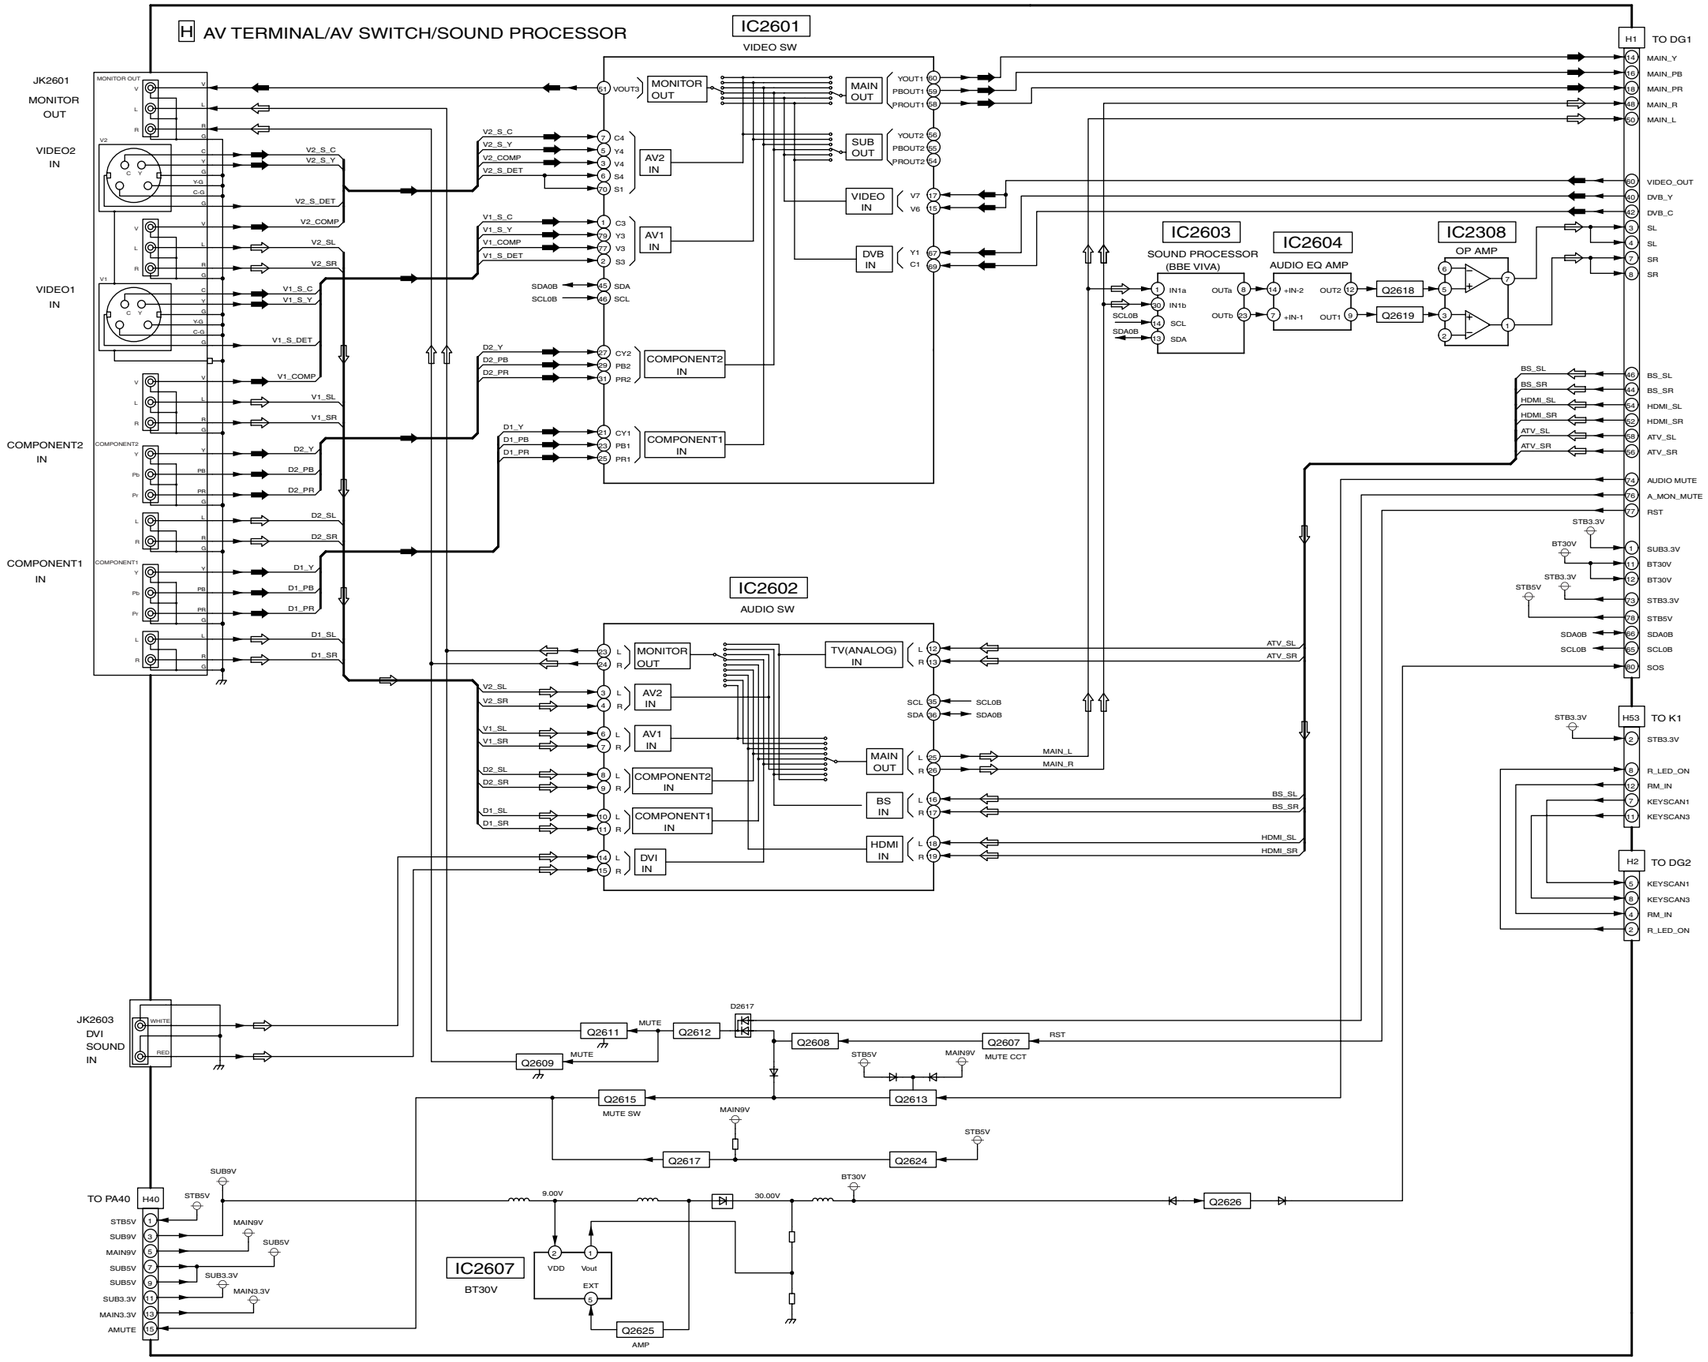


TH-42/50PX6U
H-Board Block Diagram

TH-42/50PX6U
H-Board Block Diagram

## 6.5. H-Board (1 of 3) Schematic Diagram

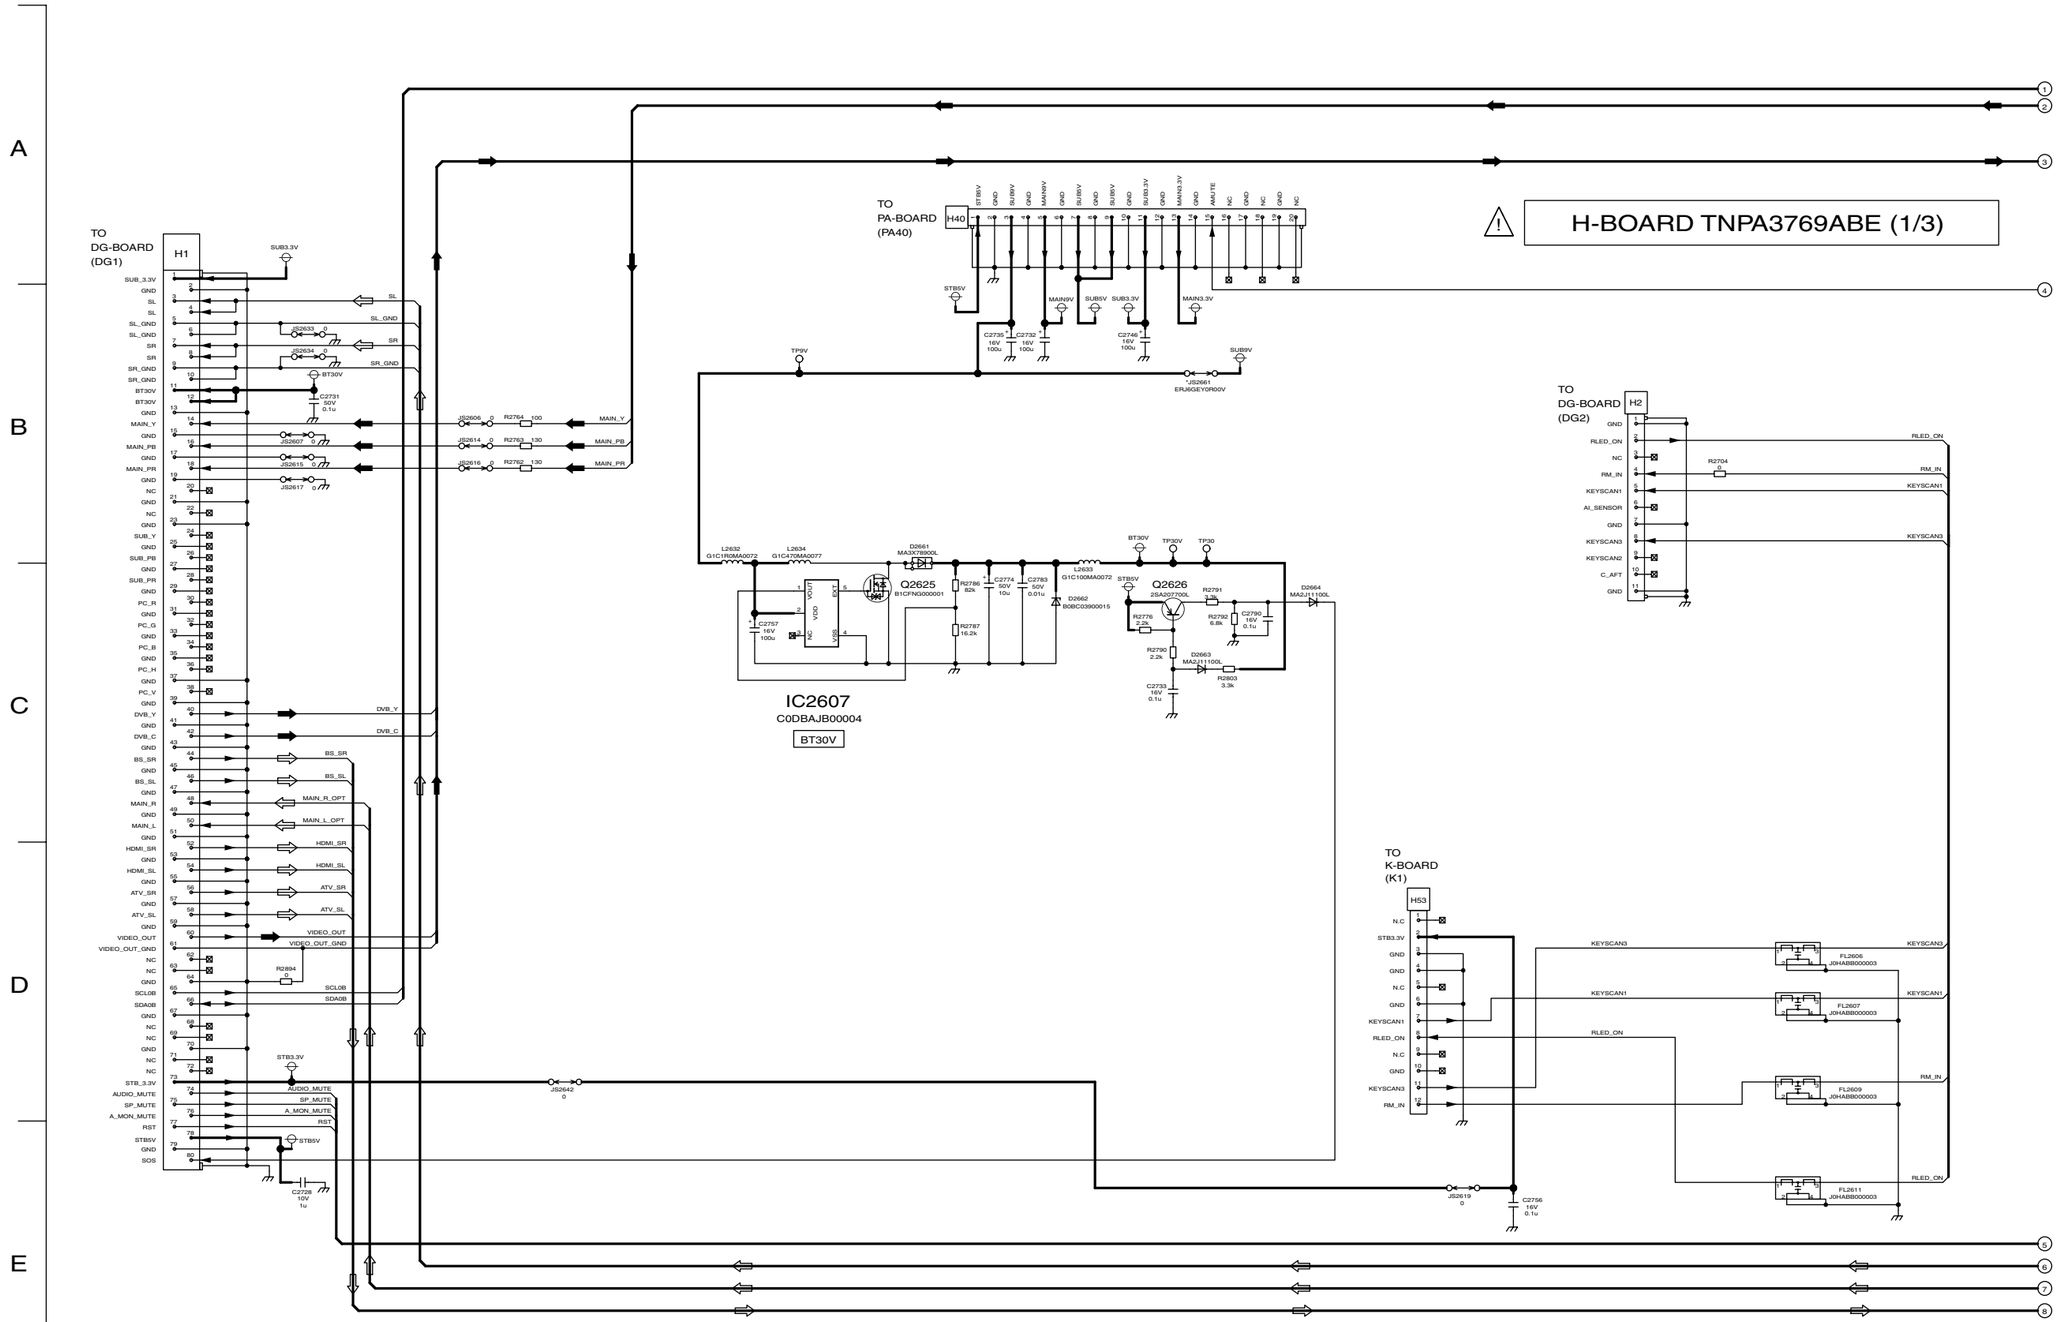


TH-42/50PX6U
H-Board (1 of 3) Schematic Diagram

TH-42/50PX6U
H-Board (1 of 3) Schematic Diagram

## 6.6. H-Board (2 of 3) Schematic Diagram

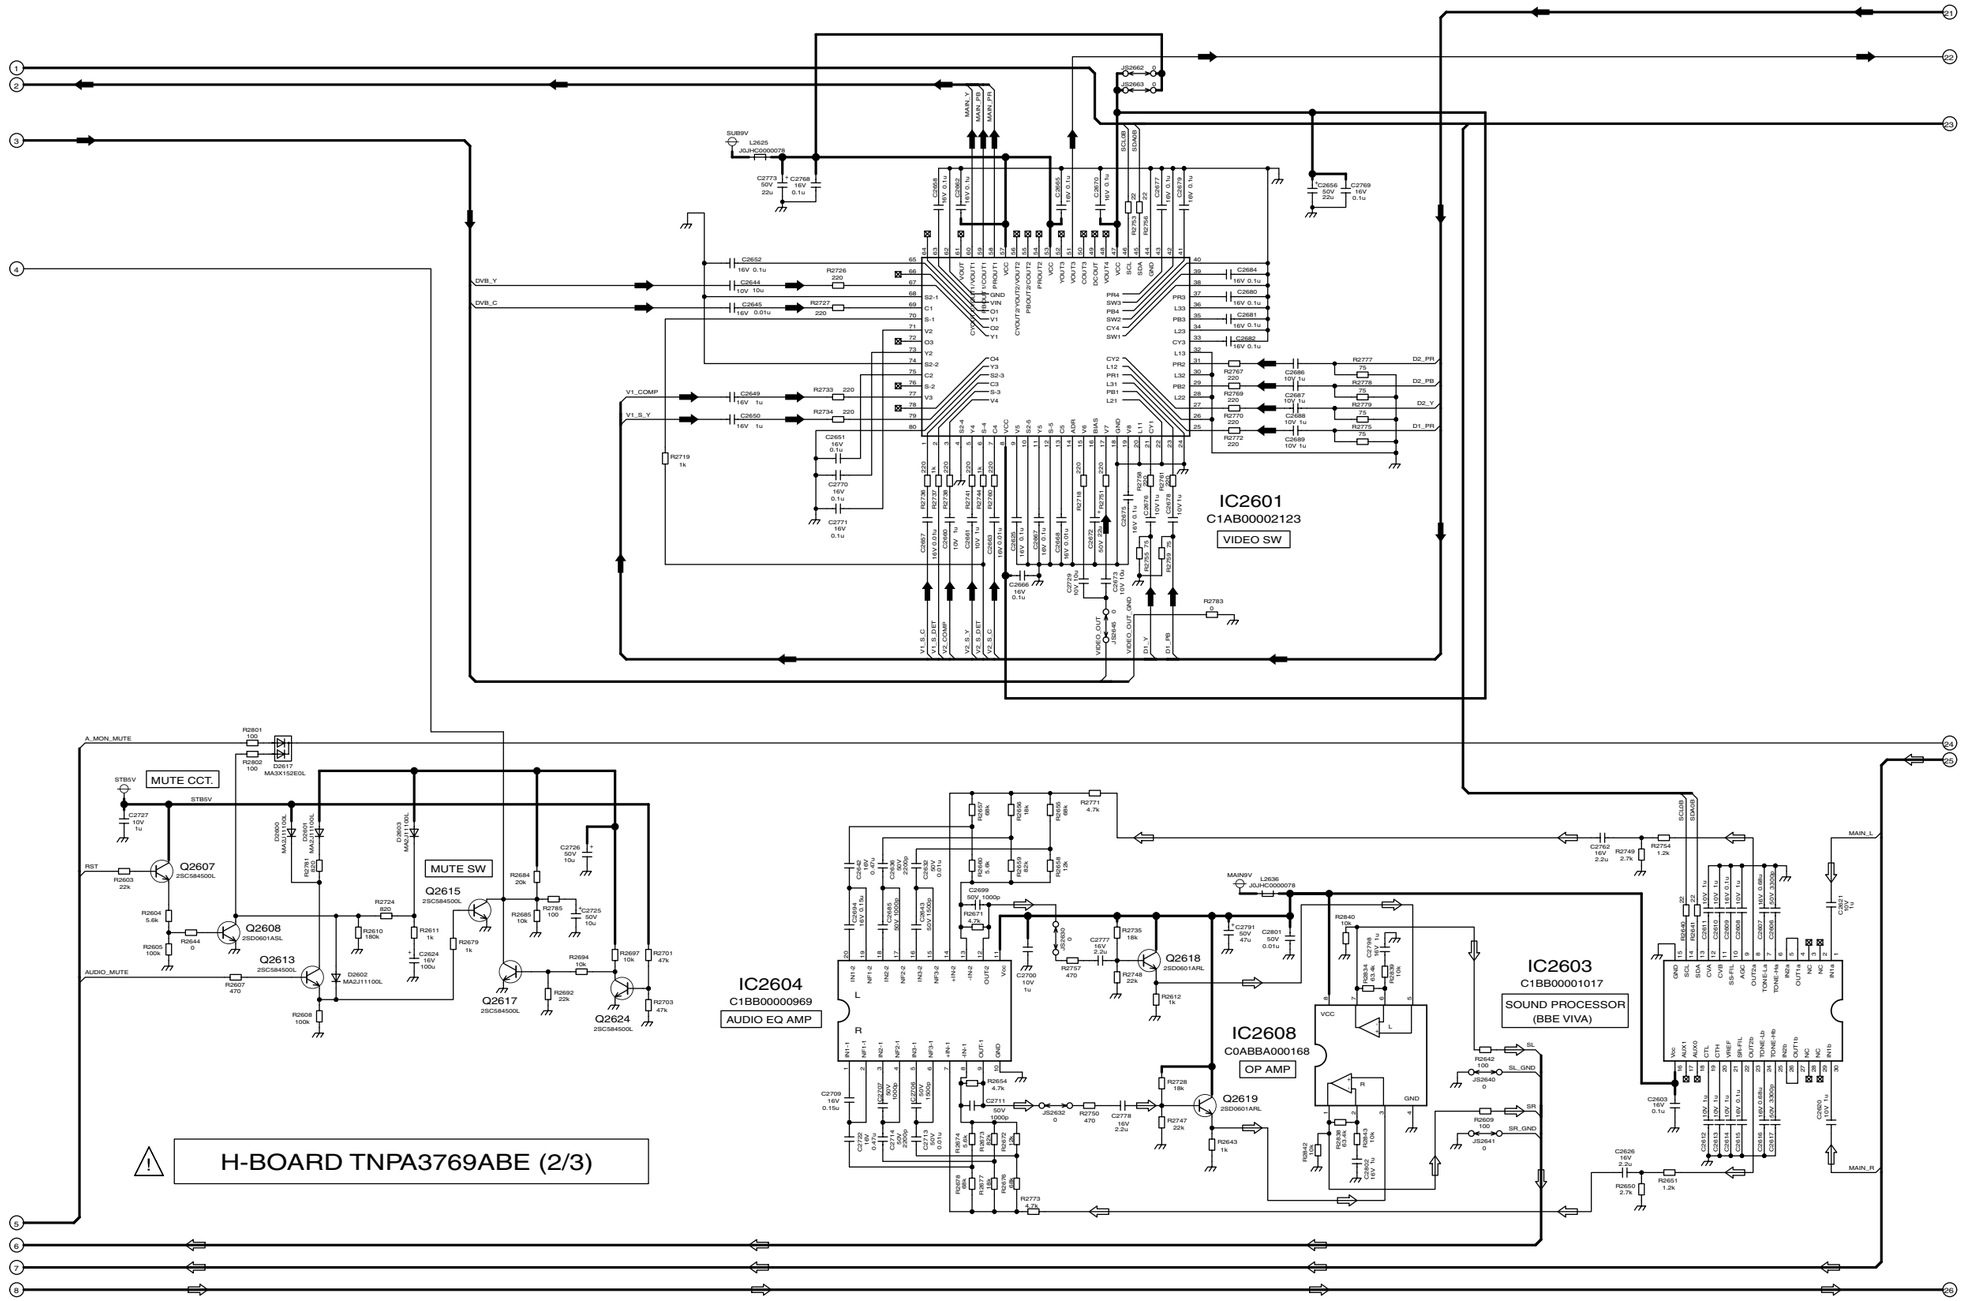

# 6.7. H-Board (3 of 3) Schematic Diagram

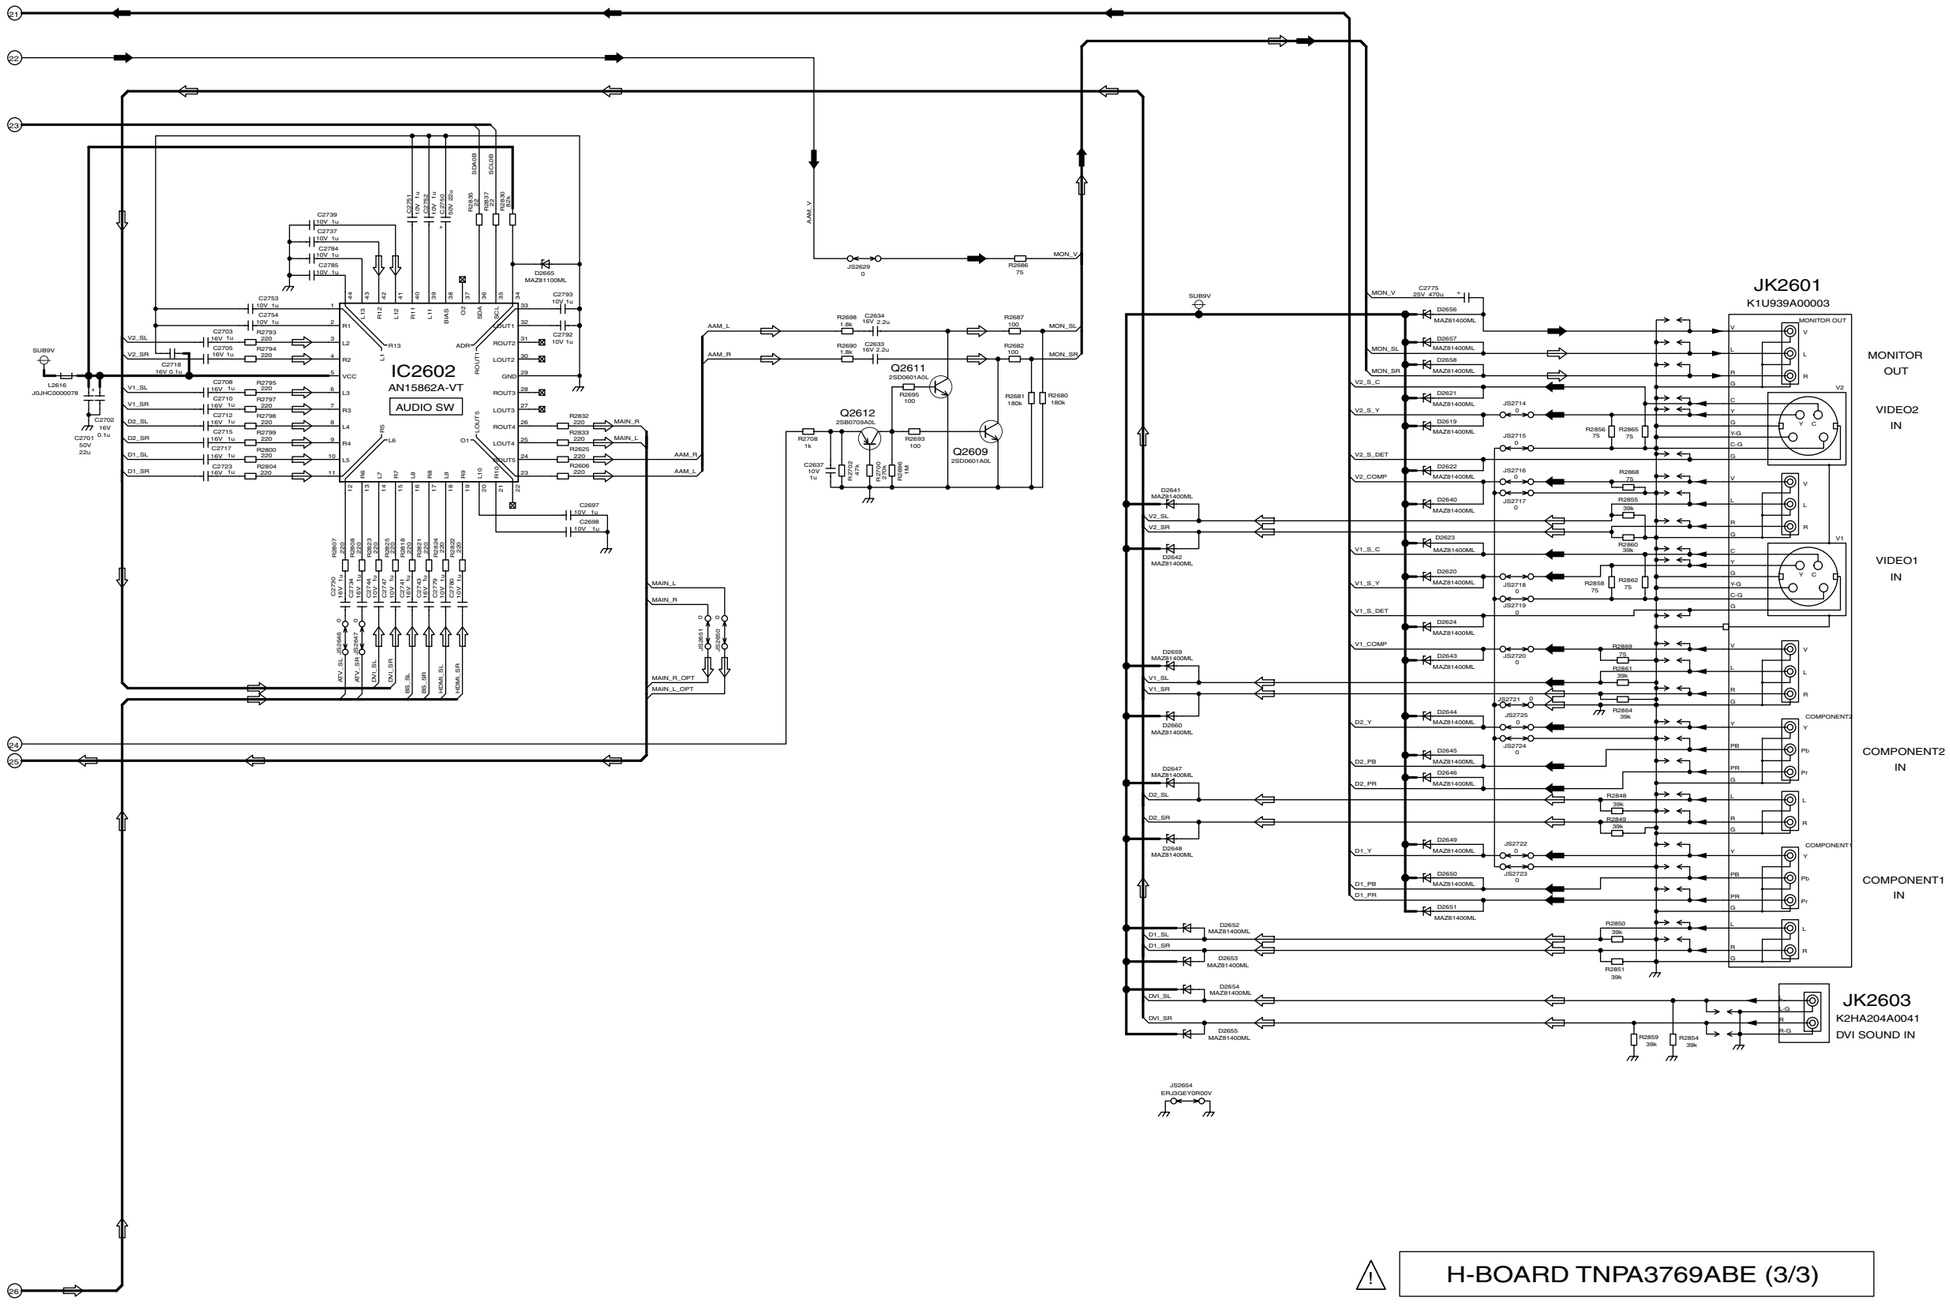


TH-42/50PX60U
H-Board (3 of 3) Schematic Diagram

TH-42/50PX6U
H-Board (3 of 3) Schematic Diagram

16 17 18 19 20 21 22 23

## 6.8. K and S-Board Block and Schematic Diagram

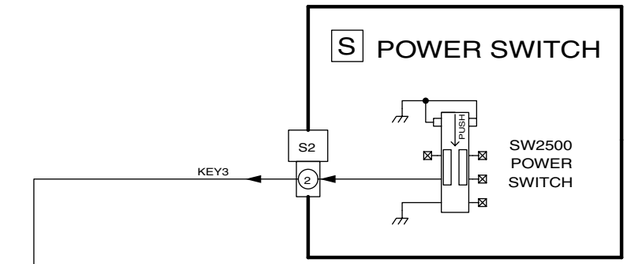


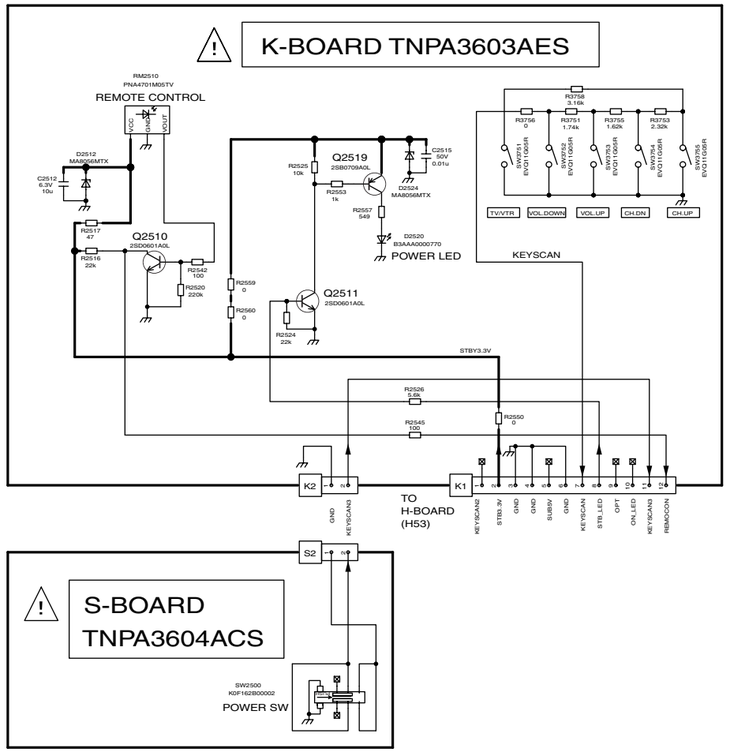




TH-42/50PX6U
K and S-Board Schematic Diagram

## 6.9. DG-Board (1 of 3) Block Diagram

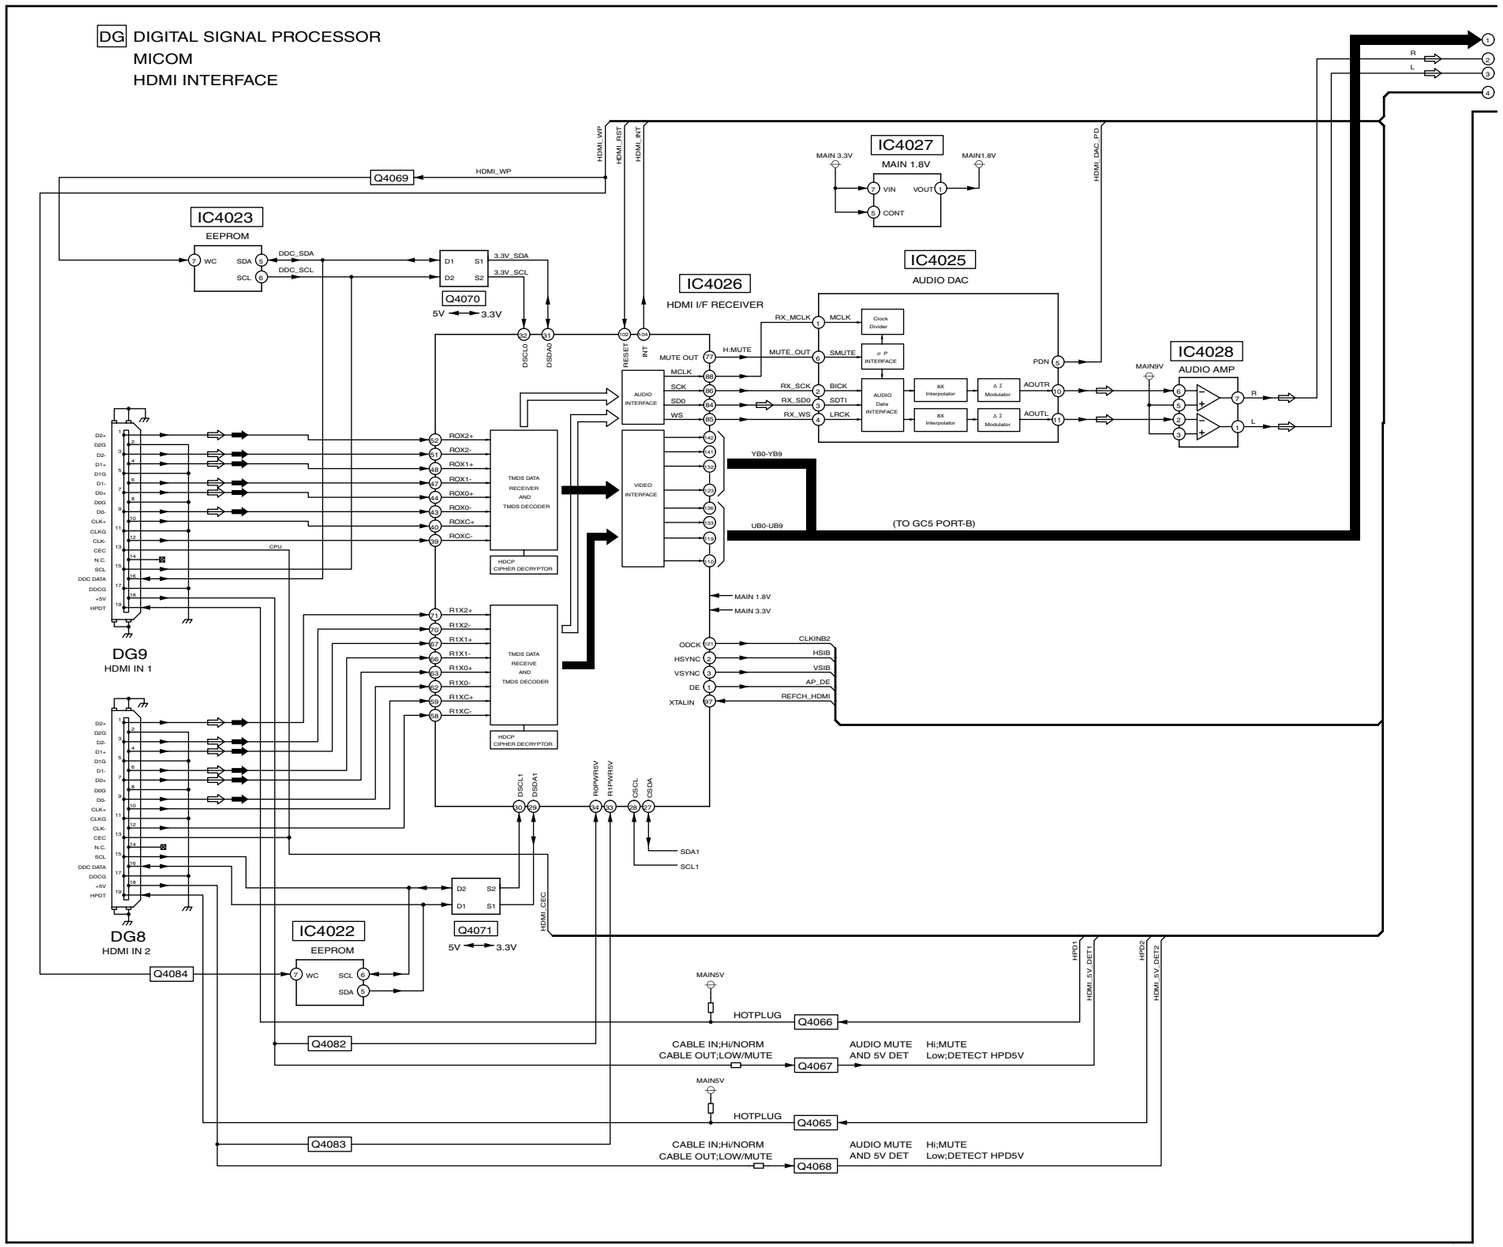




TH-42/50PX6U
DG-Board (1 of 3) Block Diagram

# 6.10. DG-Board (2 of 3) Block Diagram

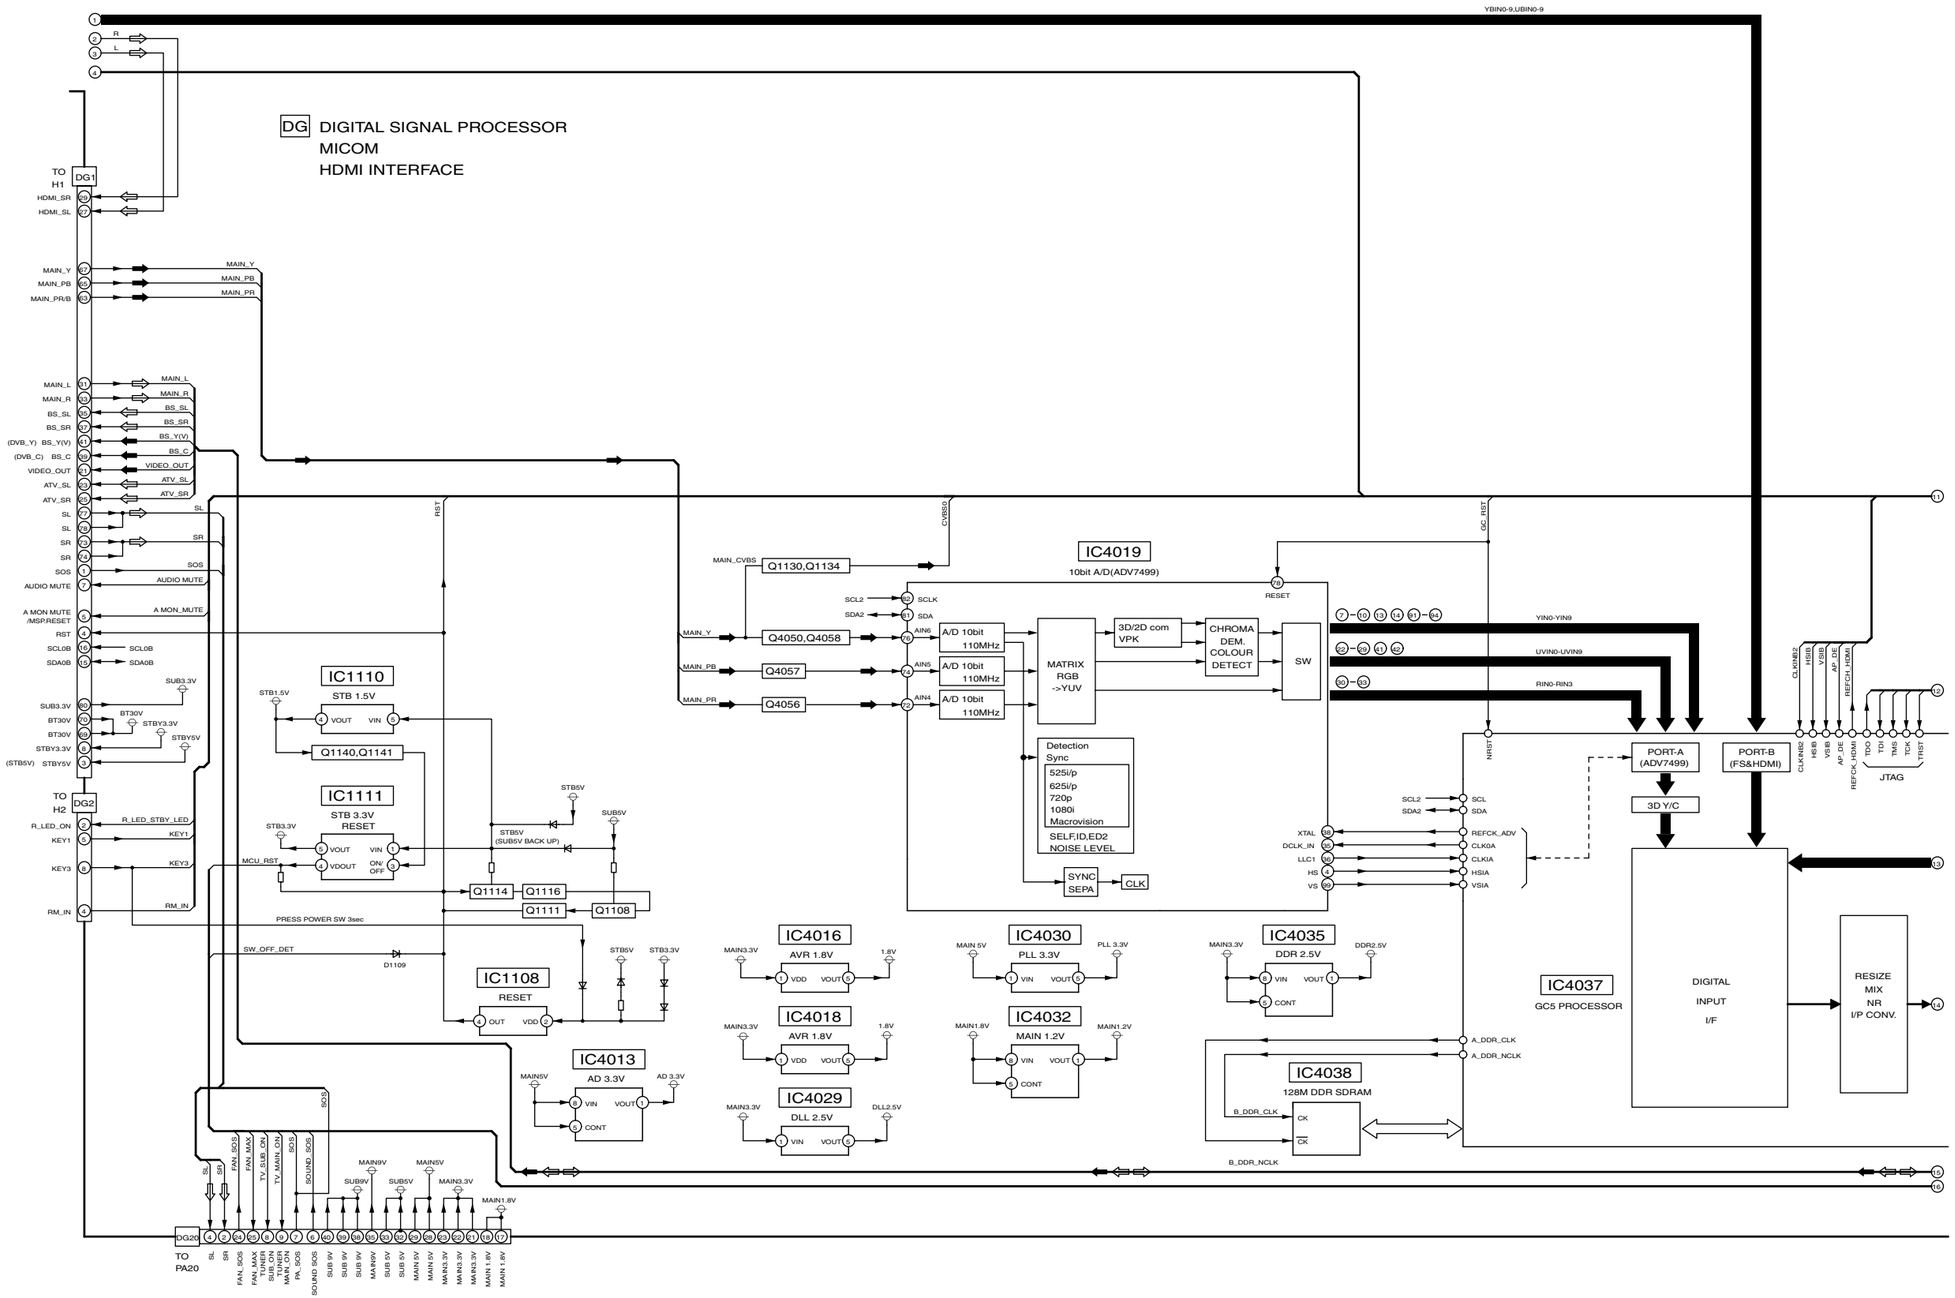


TH-42/50PX6U
DG-Board (2 of 3) Block Diagram

TH-42/50PX6U
DG-Board (2 of 3) Block Diagram

# 6.11. DG-Board (3 of 3) Block Diagram

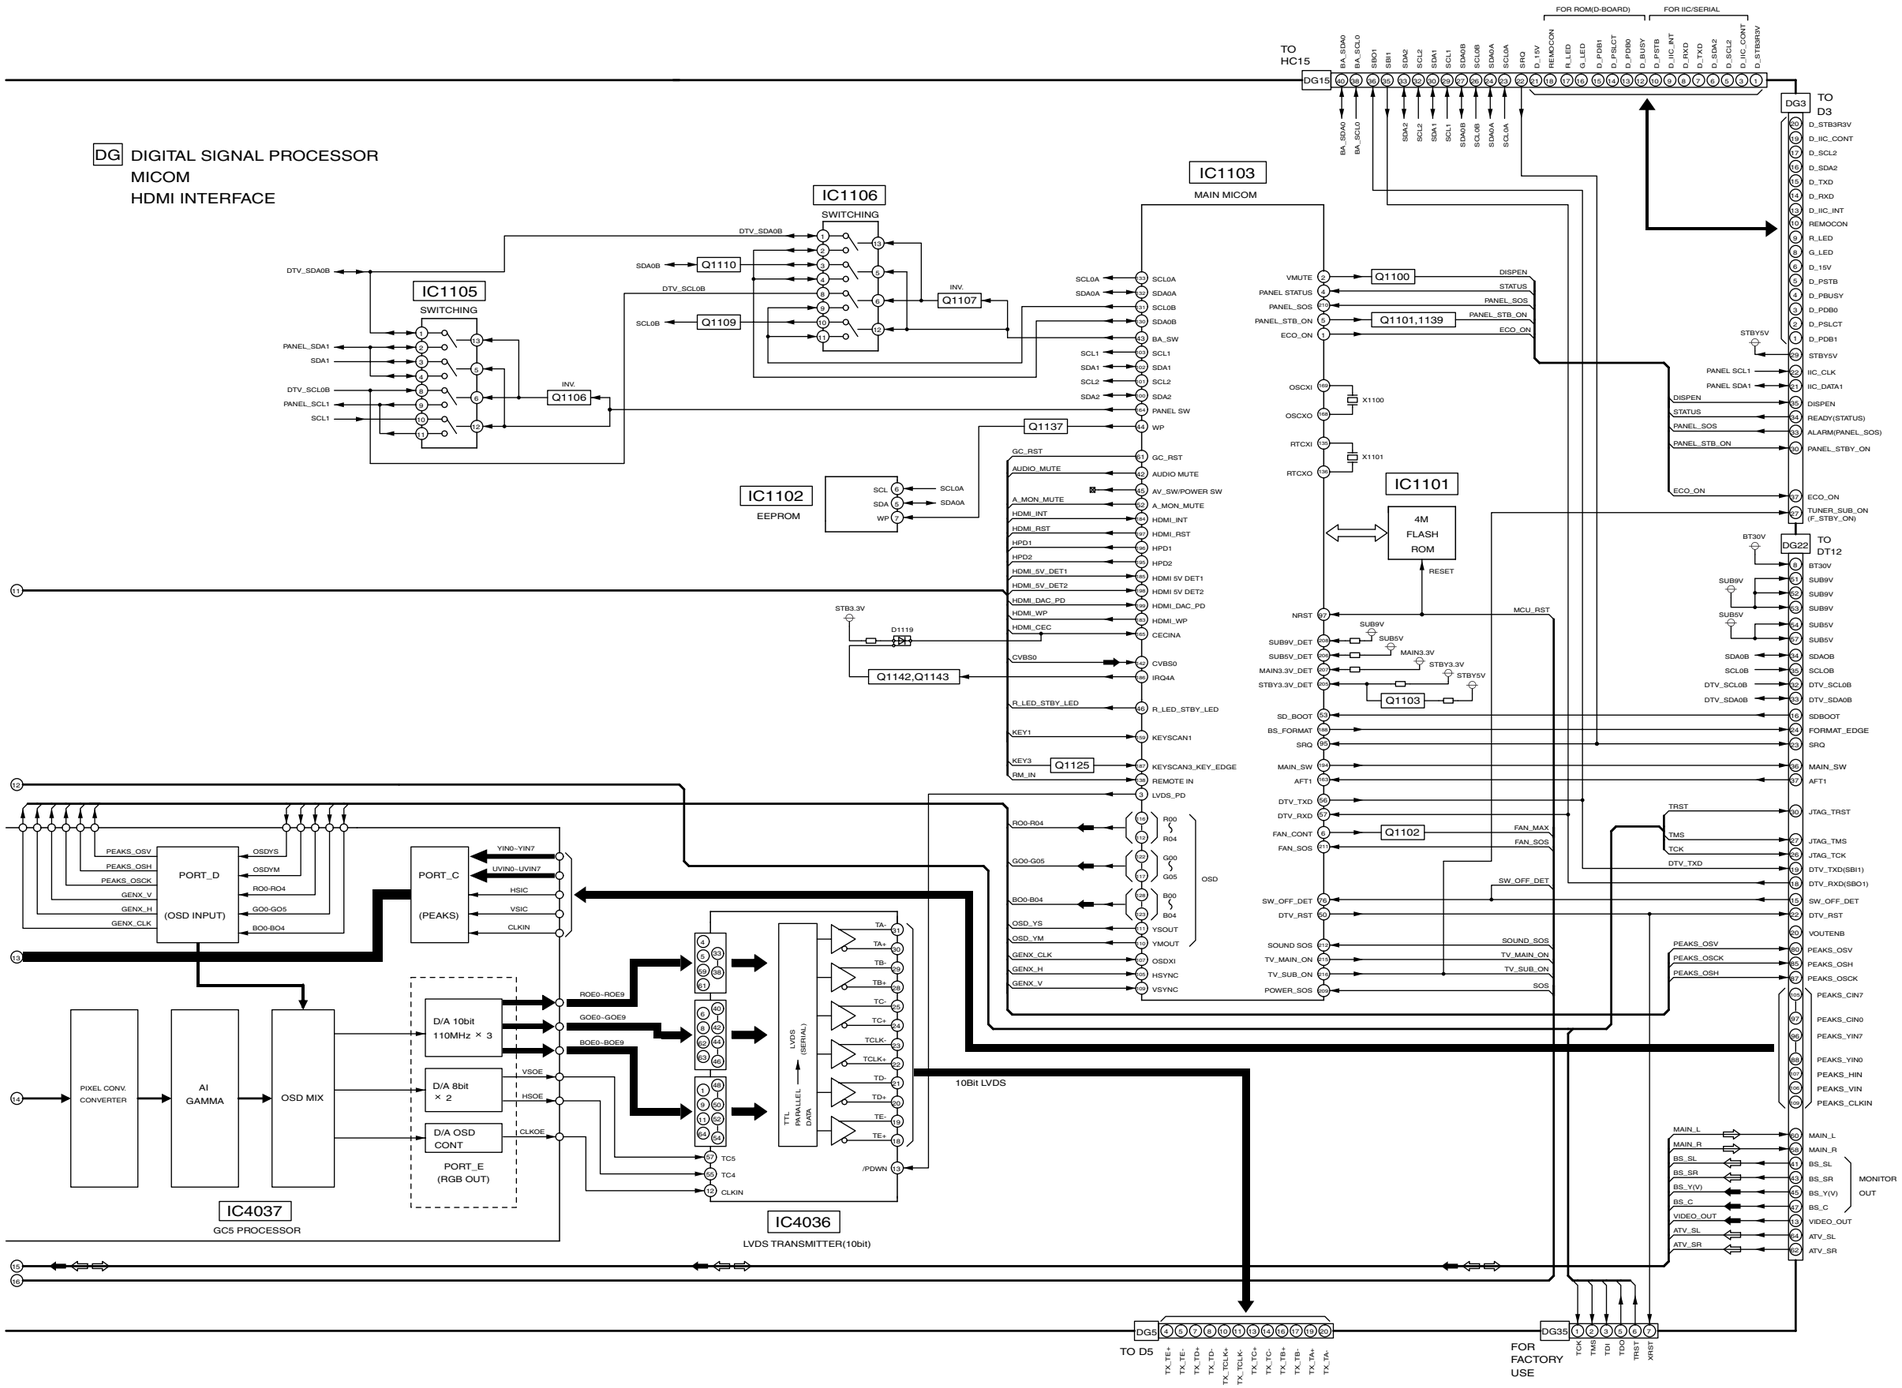


TH-42/50PX6U
DG-Board (3 of 3) Block Diagram

TH-42/50PX6U
DG-Board (3 of 3) Block Diagram

# 6.12. DG-Board (1 of 8) Schematic Diagram

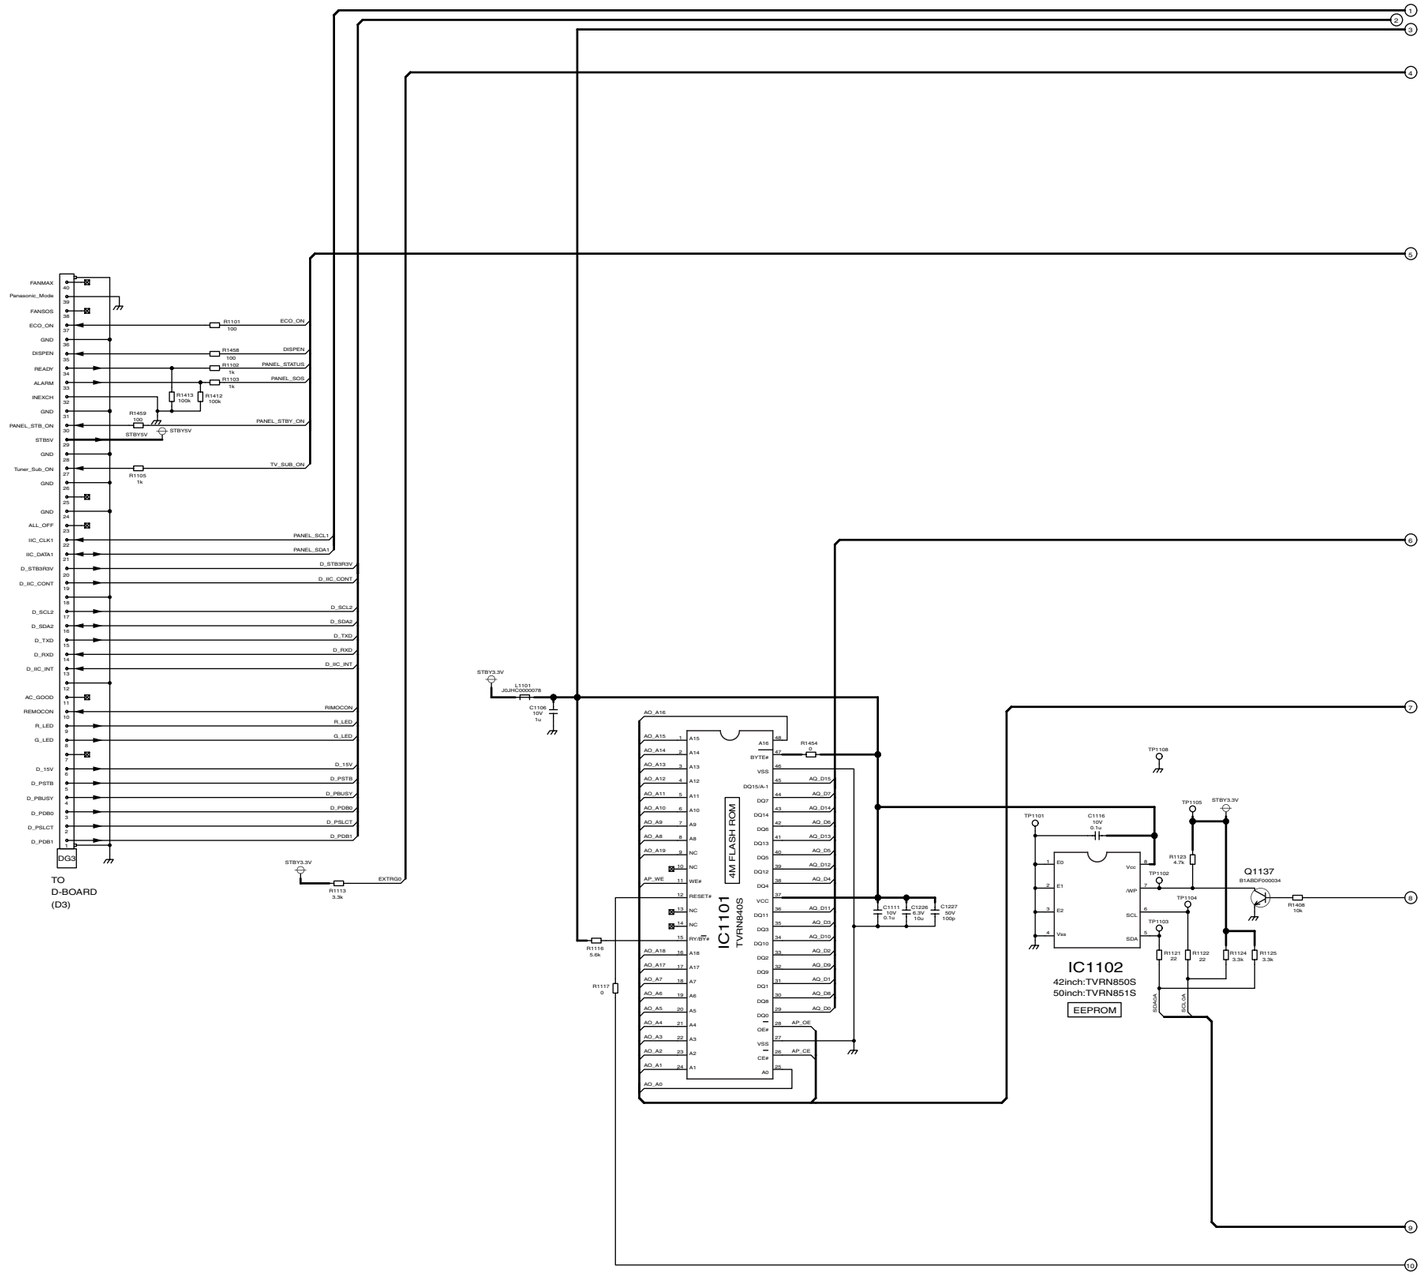


DG-BOARD (1/8)
TNPA3903BGS (42inch)
TNPA3903BHS (50inch)

TH-42/50PX6U
DG-Board (1 of 8) Schematic Diagram

TH-42/50PX6U
DG-Board (1 of 8) Schematic Diagram

# 6.13. DG-Board (2 of 8) Schematic Diagram

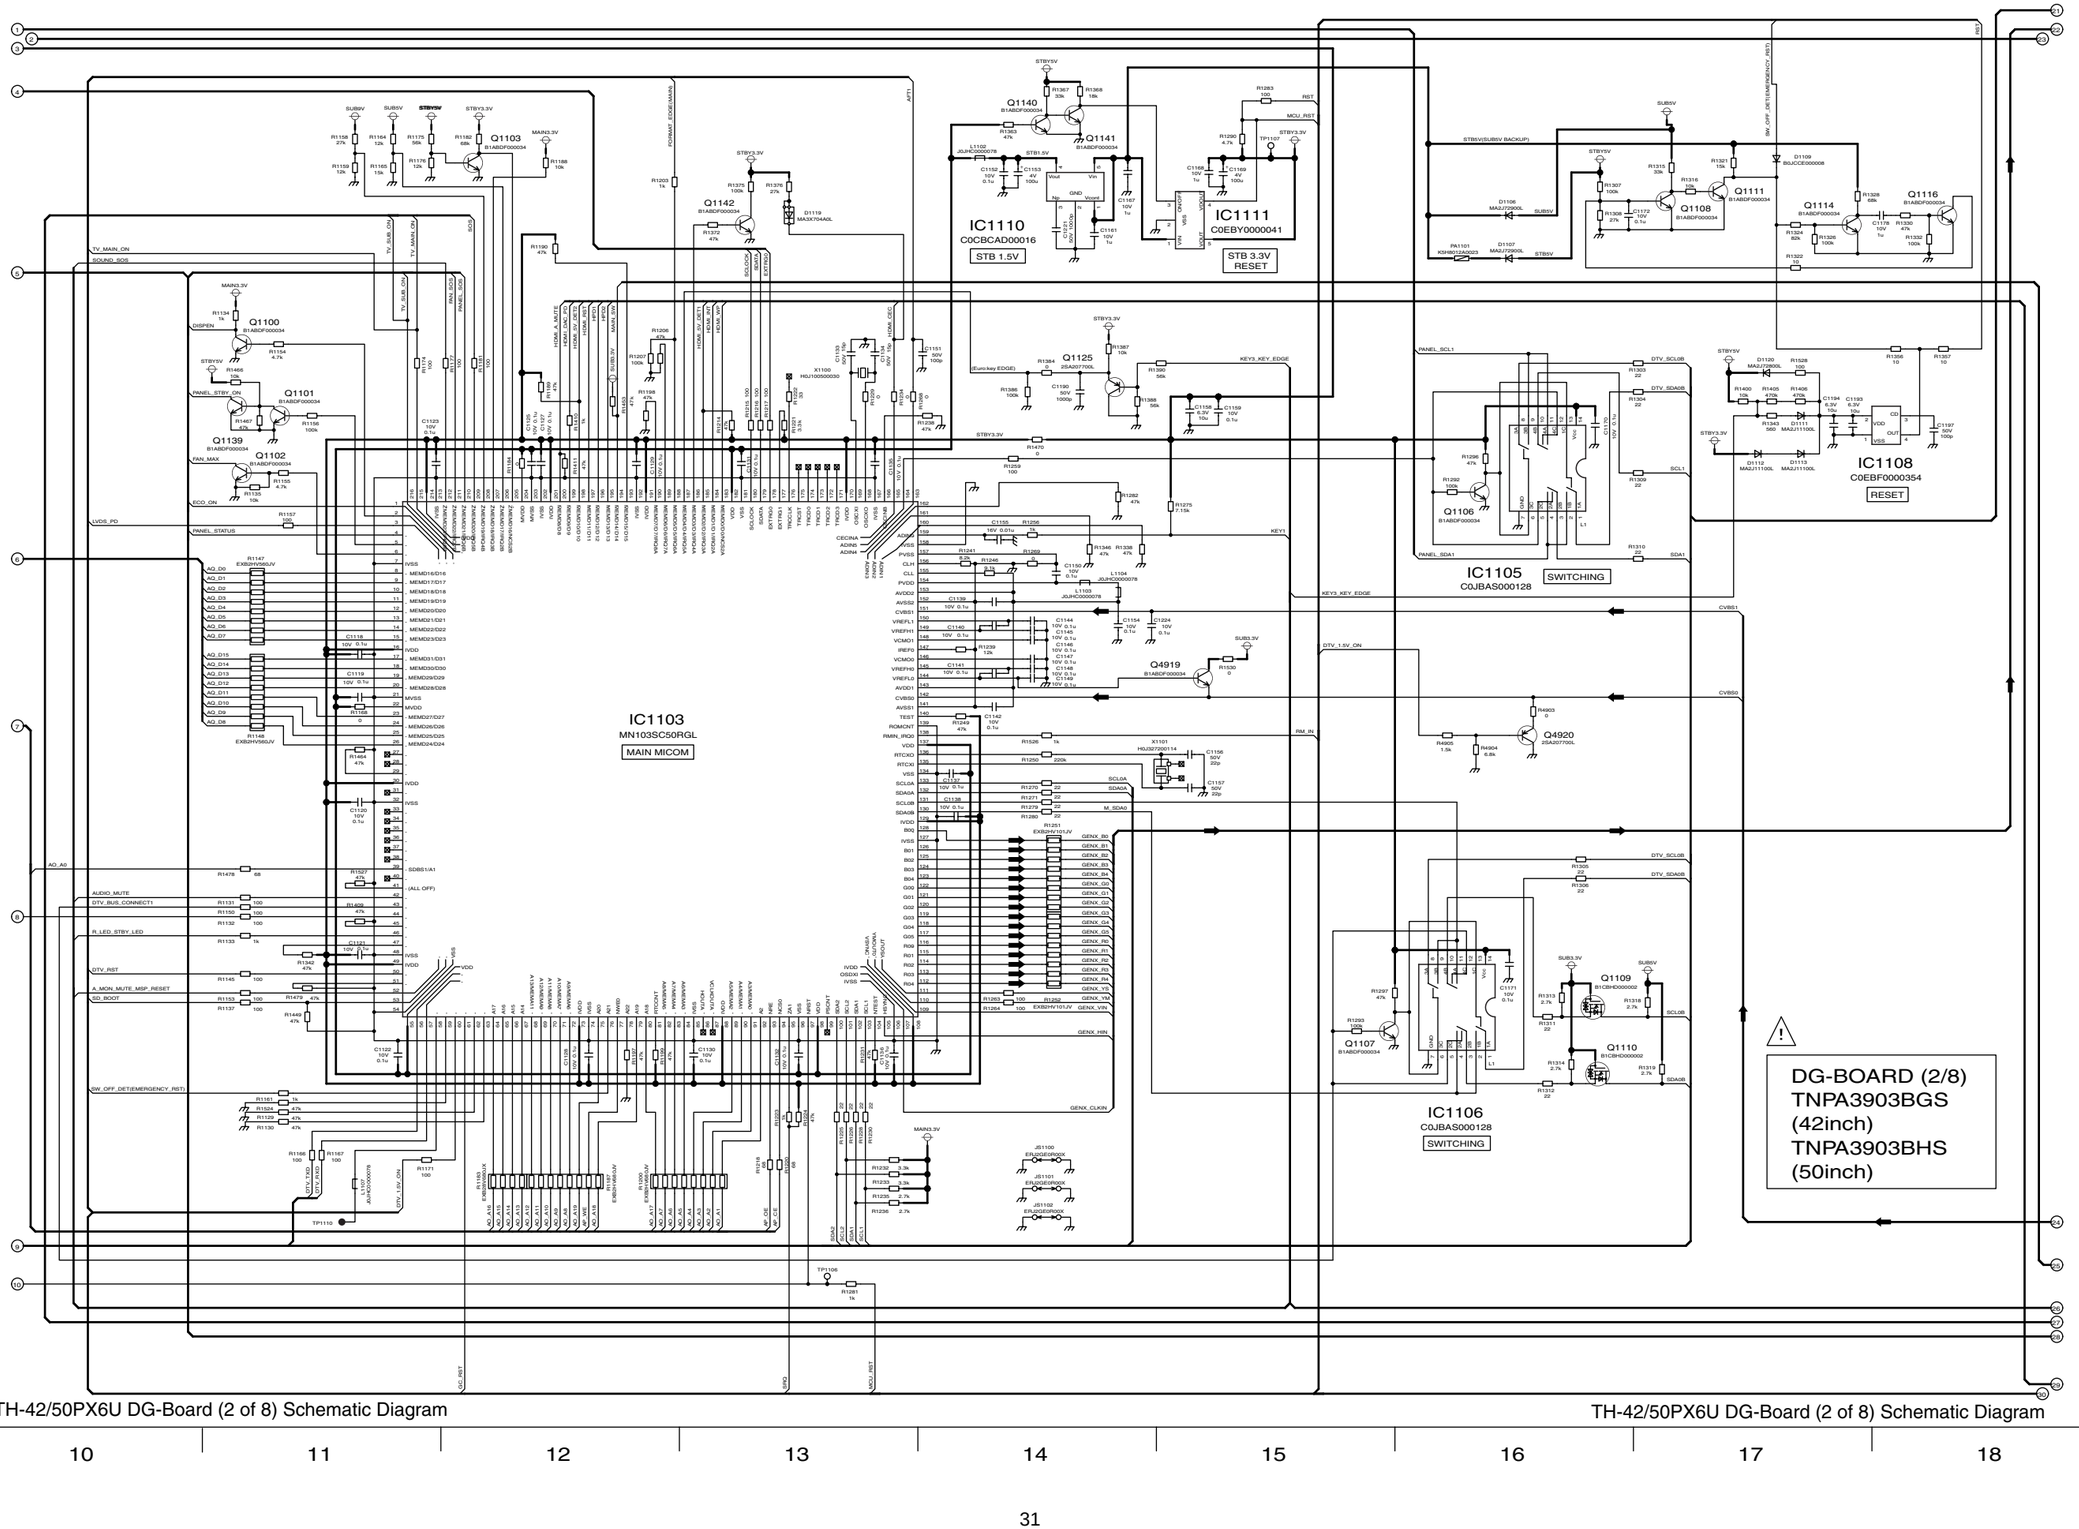




TH-42/50PX6U DG-Board (2 of 8) Schematic Diagram

# 6.14. DG-Board (3 of 8) Schematic Diagram

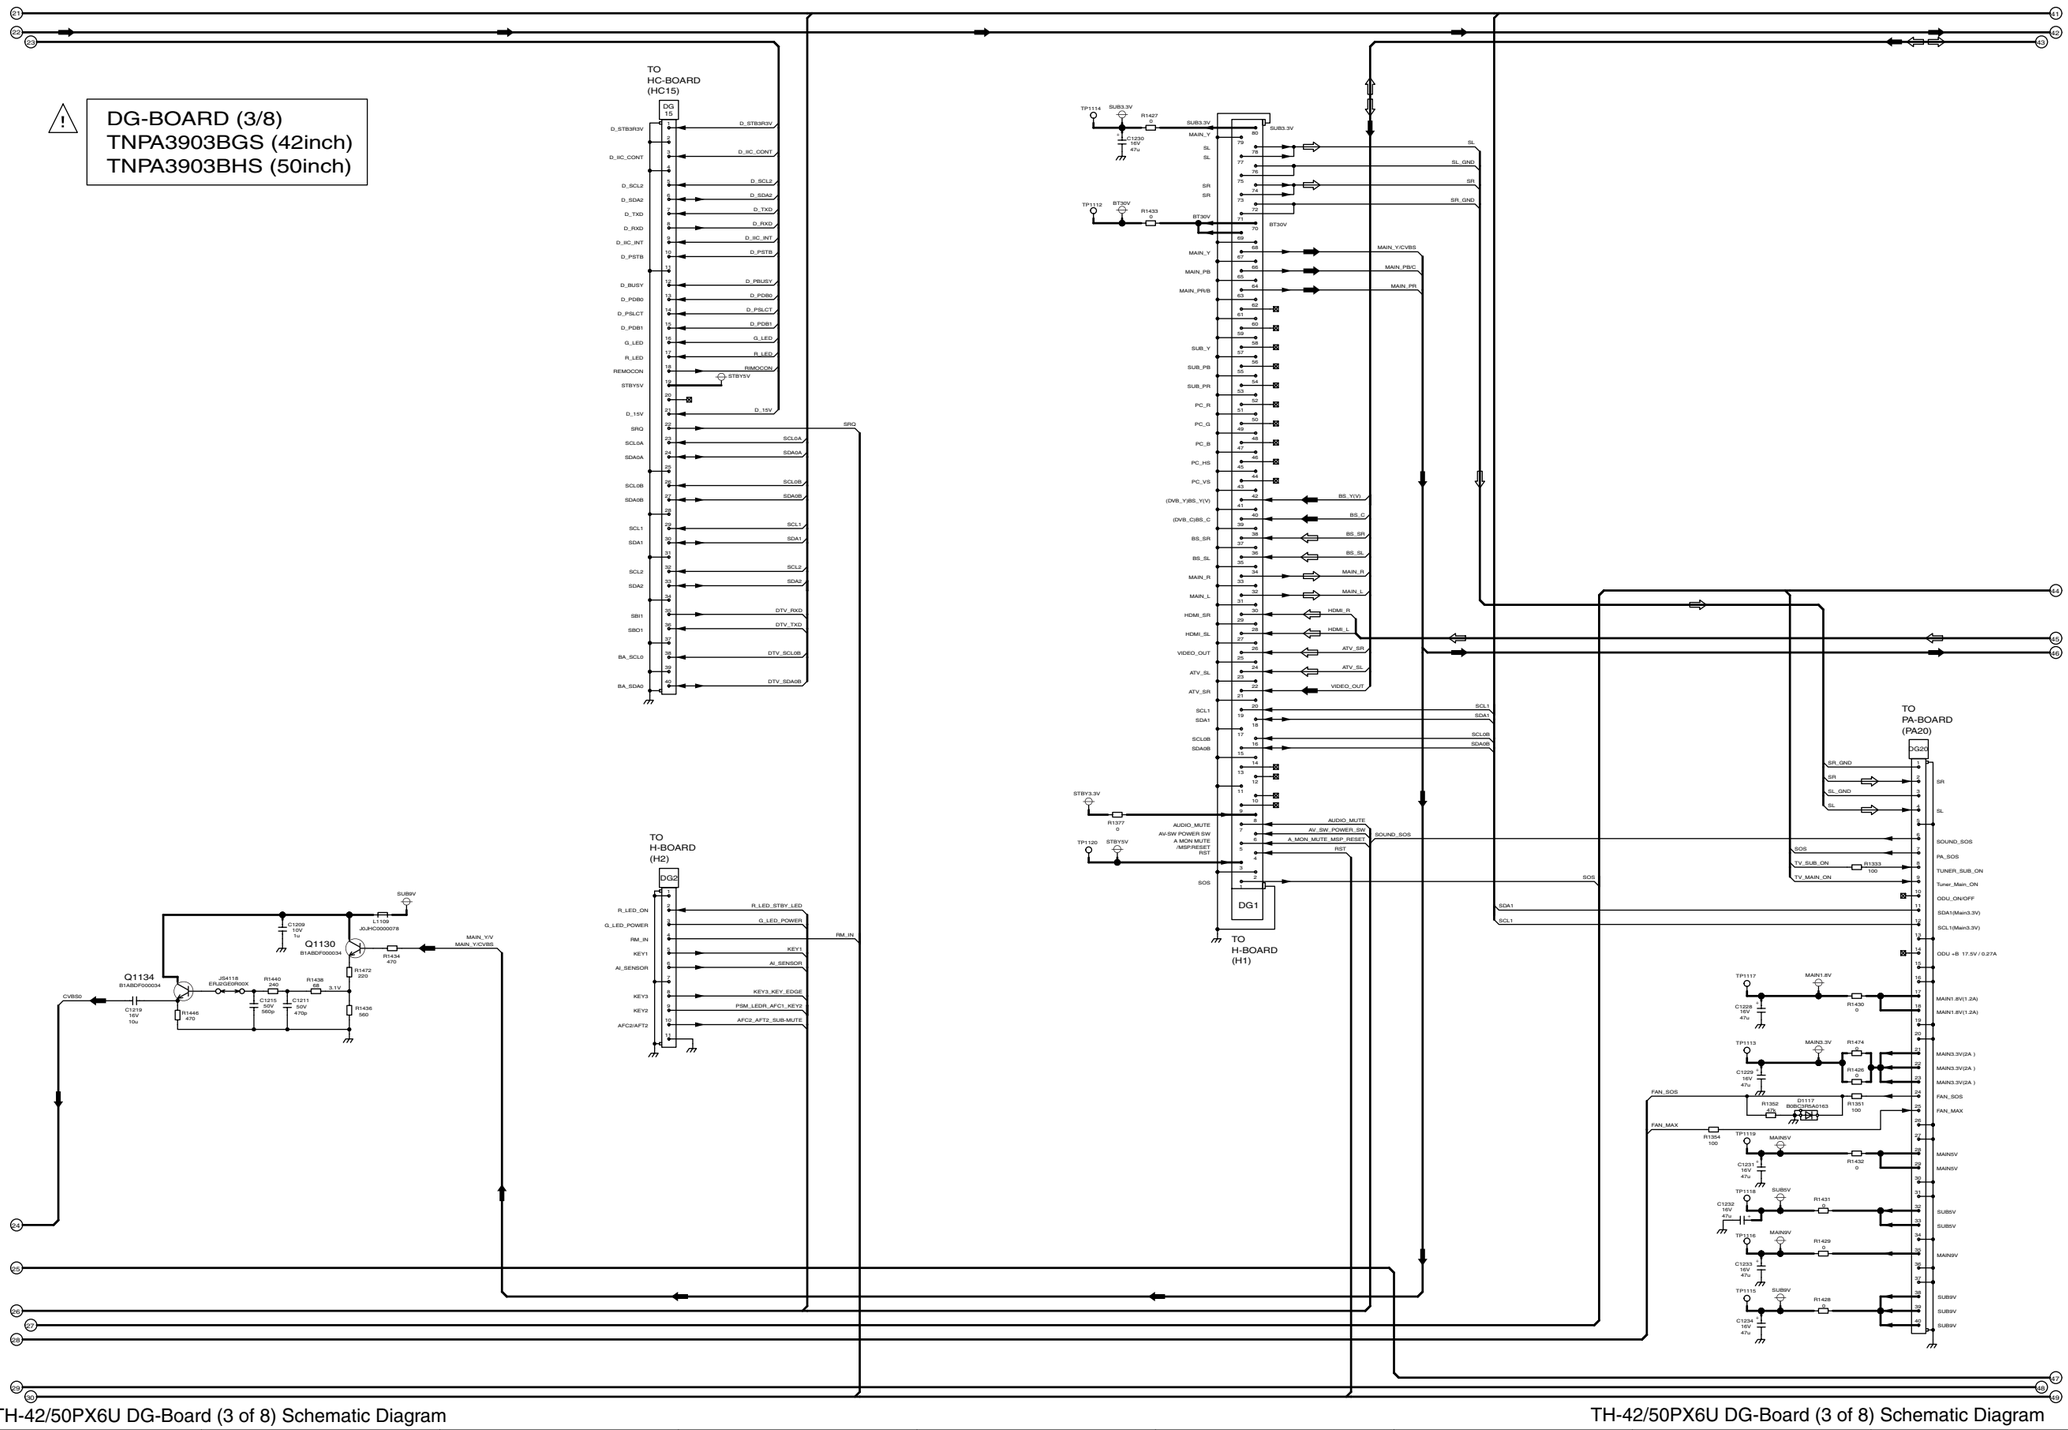

# 6.15. DG-Board (4 of 8) Schematic Diagram

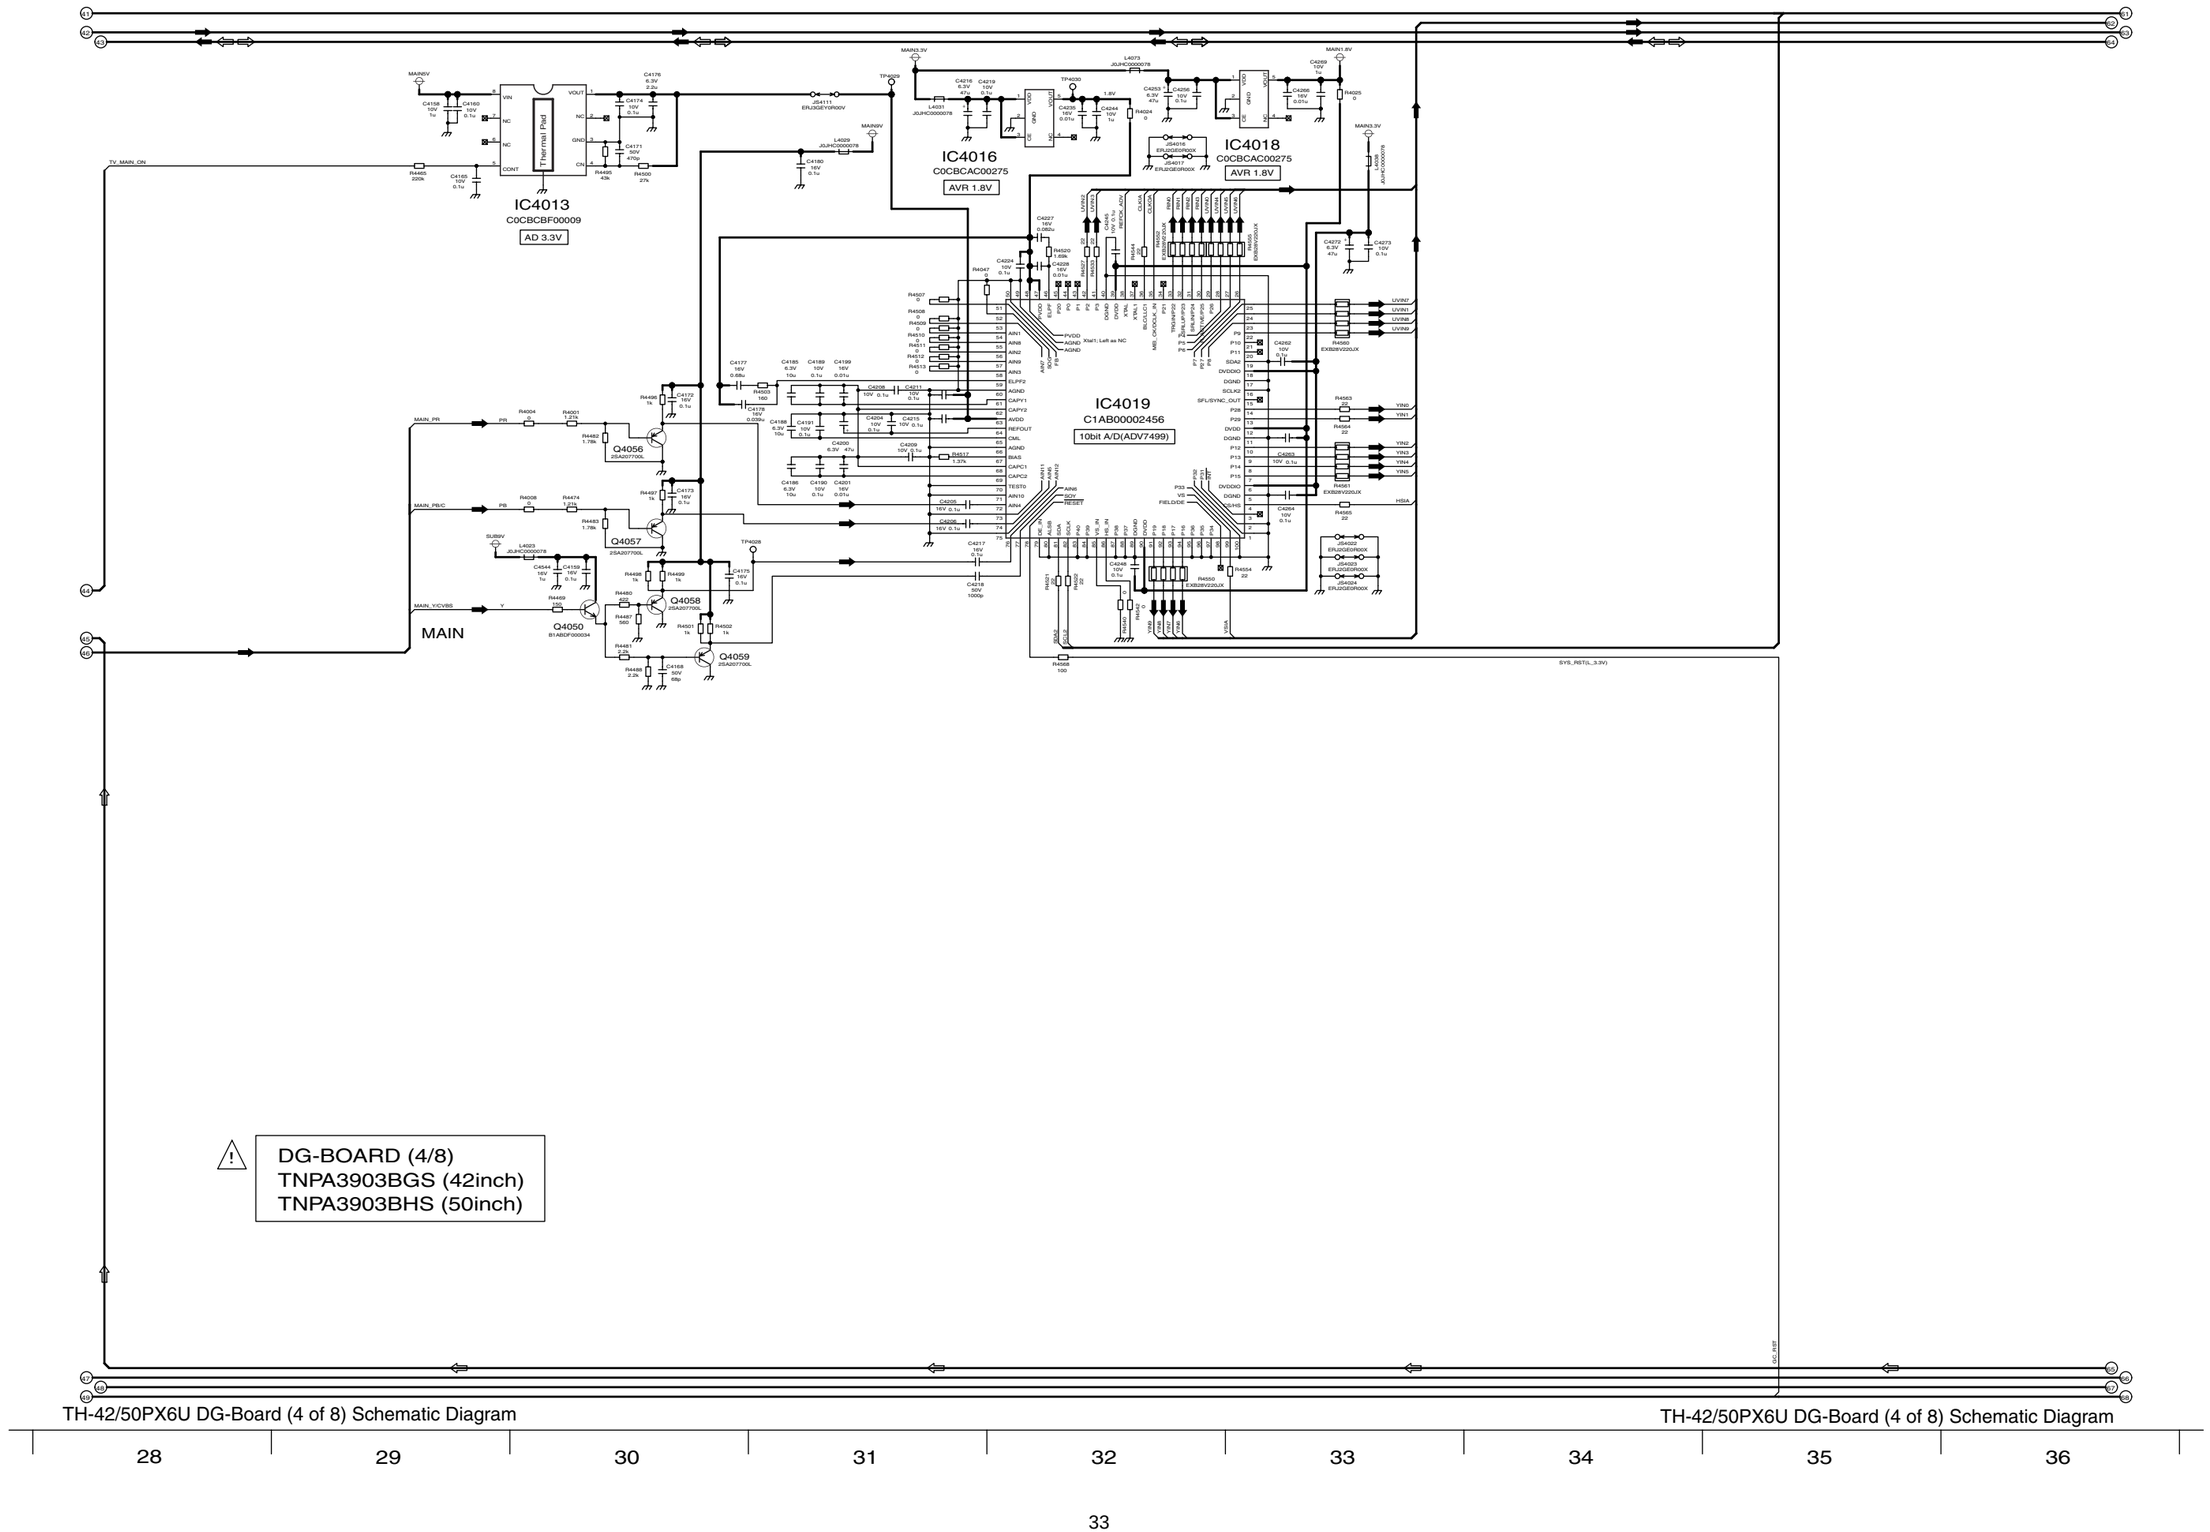

# 6.16. DG-Board (5 of 8) Schematic Diagram

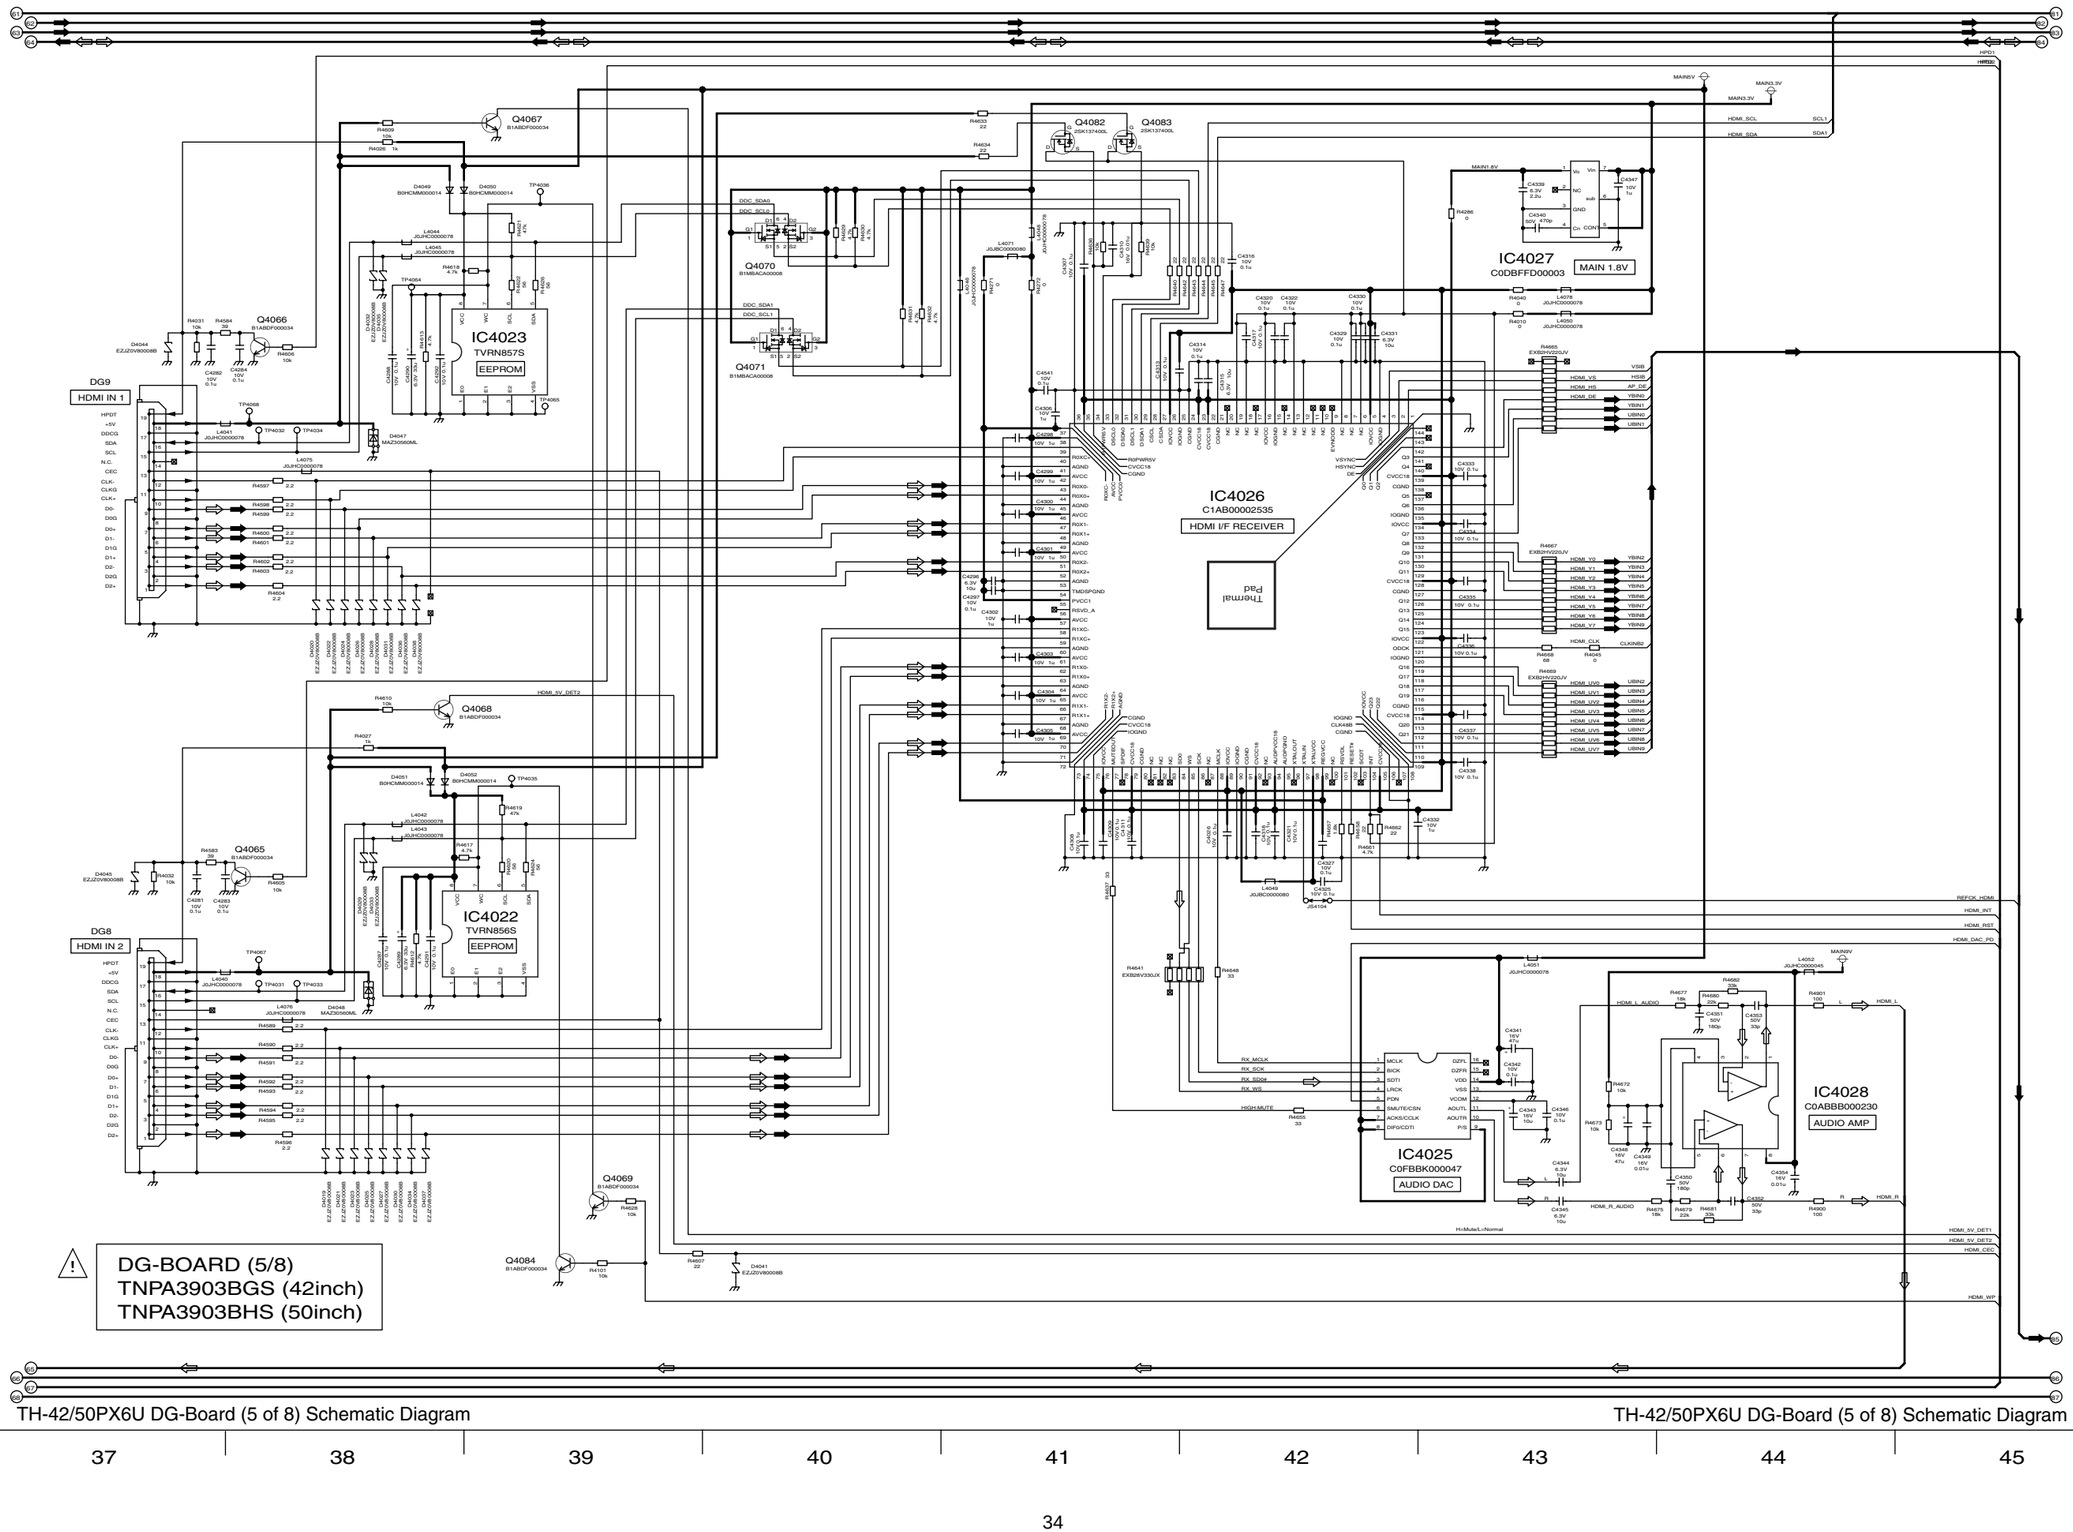


TH-42/50PX6U DG-Board (5 of 8) Schematic Diagram

TH-42/50PX6U DG-Board (5 of 8) Schematic Diagram

37 38 39 40 41 42 43 44 45

# 6.17. DG-Board (6 of 8) Schematic Diagram

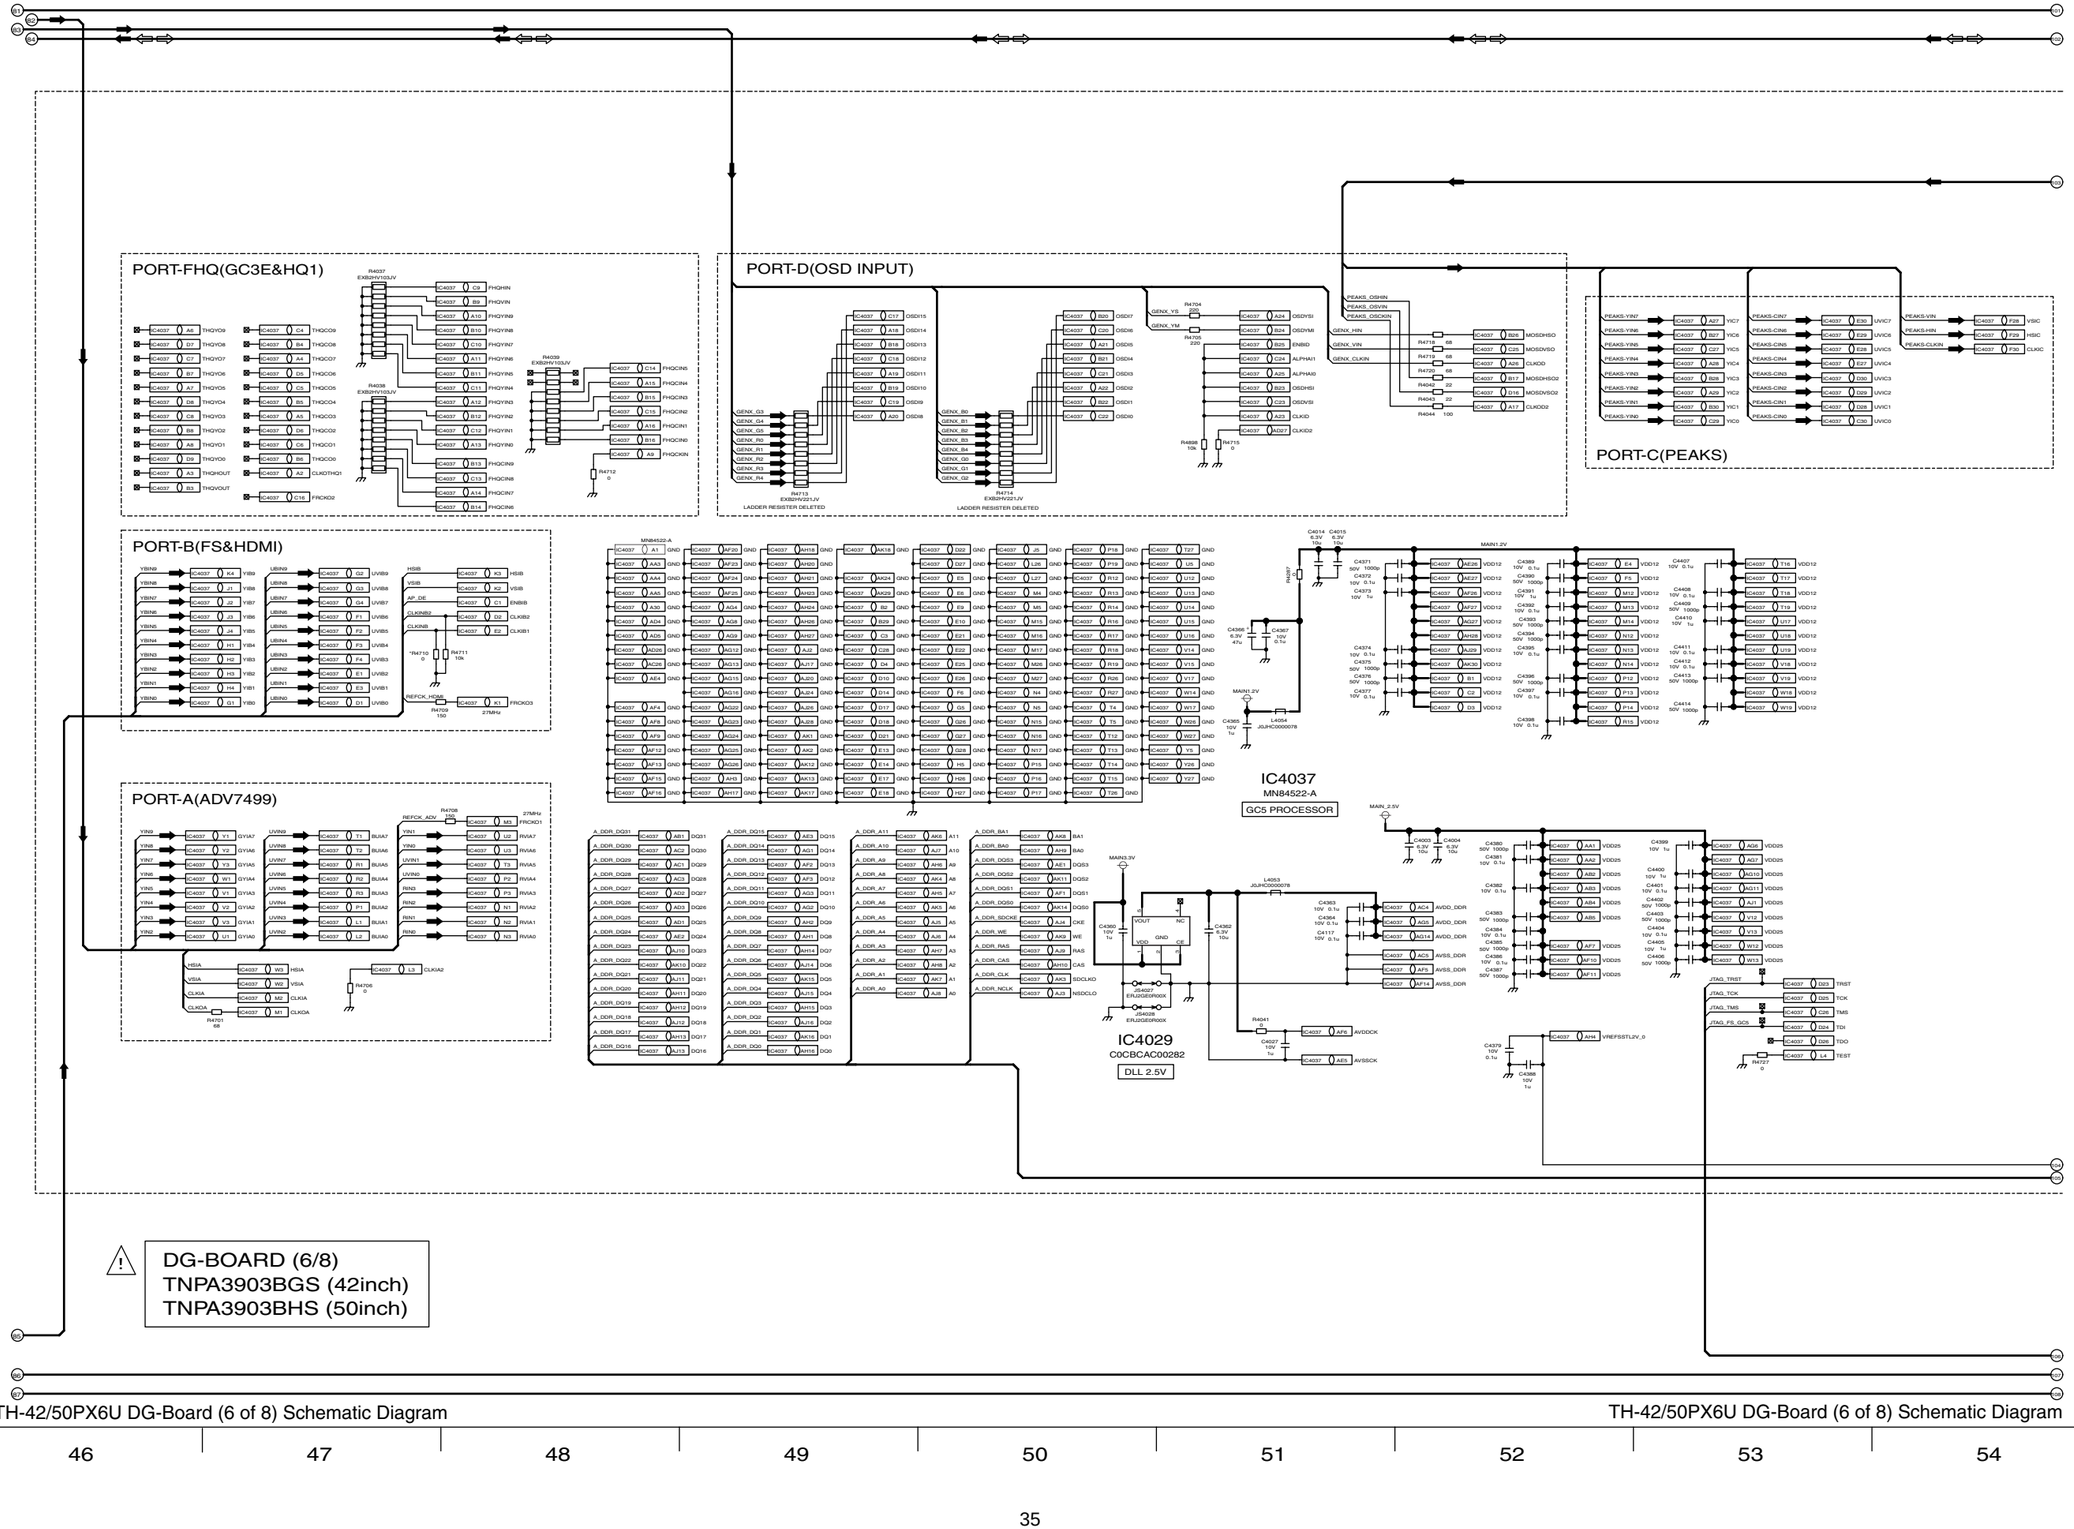


TH-42/50PX6U DG-Board (6 of 8) Schematic Diagram

TH-42/50PX6U DG-Board (6 of 8) Schematic Diagram

| 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 |
|---|---|---|---|---|---|---|---|---|

# 6.18. DG-Board (7 of 8) Schematic Diagram

DG-BOARD (7/8)
TNPA3903BGS (42inch)
TNPA3903BHS (50inch)

IC4037
MN84522-A
GC5 PROCESSOR

IC4030
C0CBCBC00190
PLL 3.3V

PORT-E
(output for Panel)

PORT-F(out)
(output for FHD&PWM)

IC4032
C0DBGYY00052
MAIN 1.2V

IC4035
C0CBCAF00031
DDR 2.5V

IC4038
C3ABQJ000048
128M DDR SDRAM
FOR GC5

TH-42/50PX6U DG-Board (7 of 8) Schematic Diagram

TH-42/50PX6U DG-Board (7 of 8) Schematic Diagram

# 6.19. DG-Board (8 of 8) Schematic Diagram

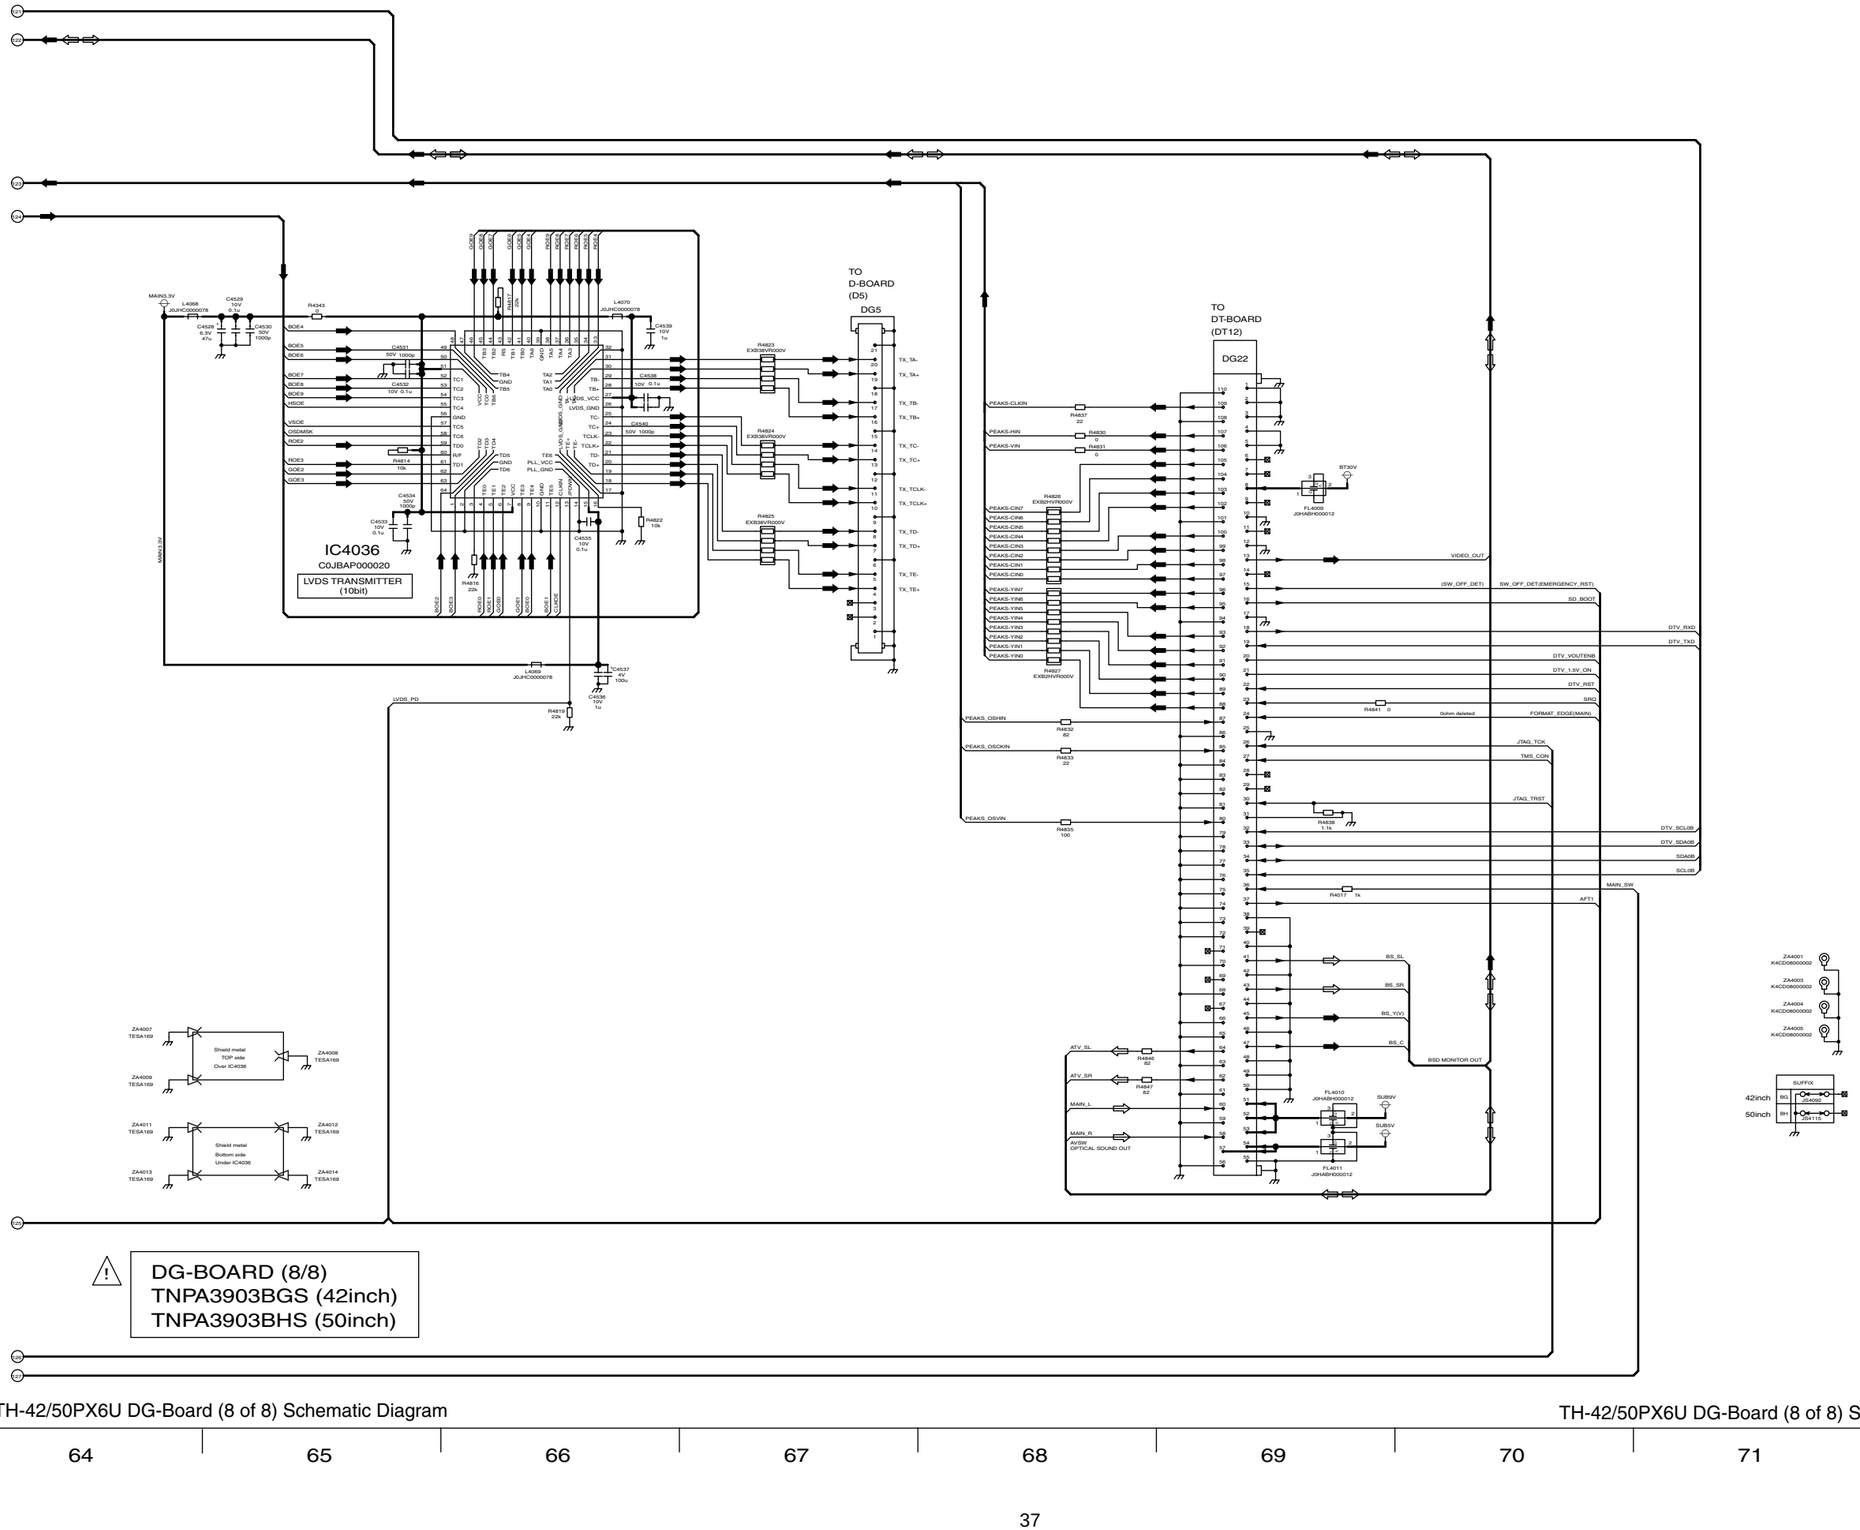


TH-42/50PX6U DG-Board (8 of 8) Schematic Diagram

TH-42/50PX6U DG-Board (8 of 8) Schematic Diagram

64 65 66 67 68 69 70 71 72

# 6.20. DT and GS-Board Block Diagram

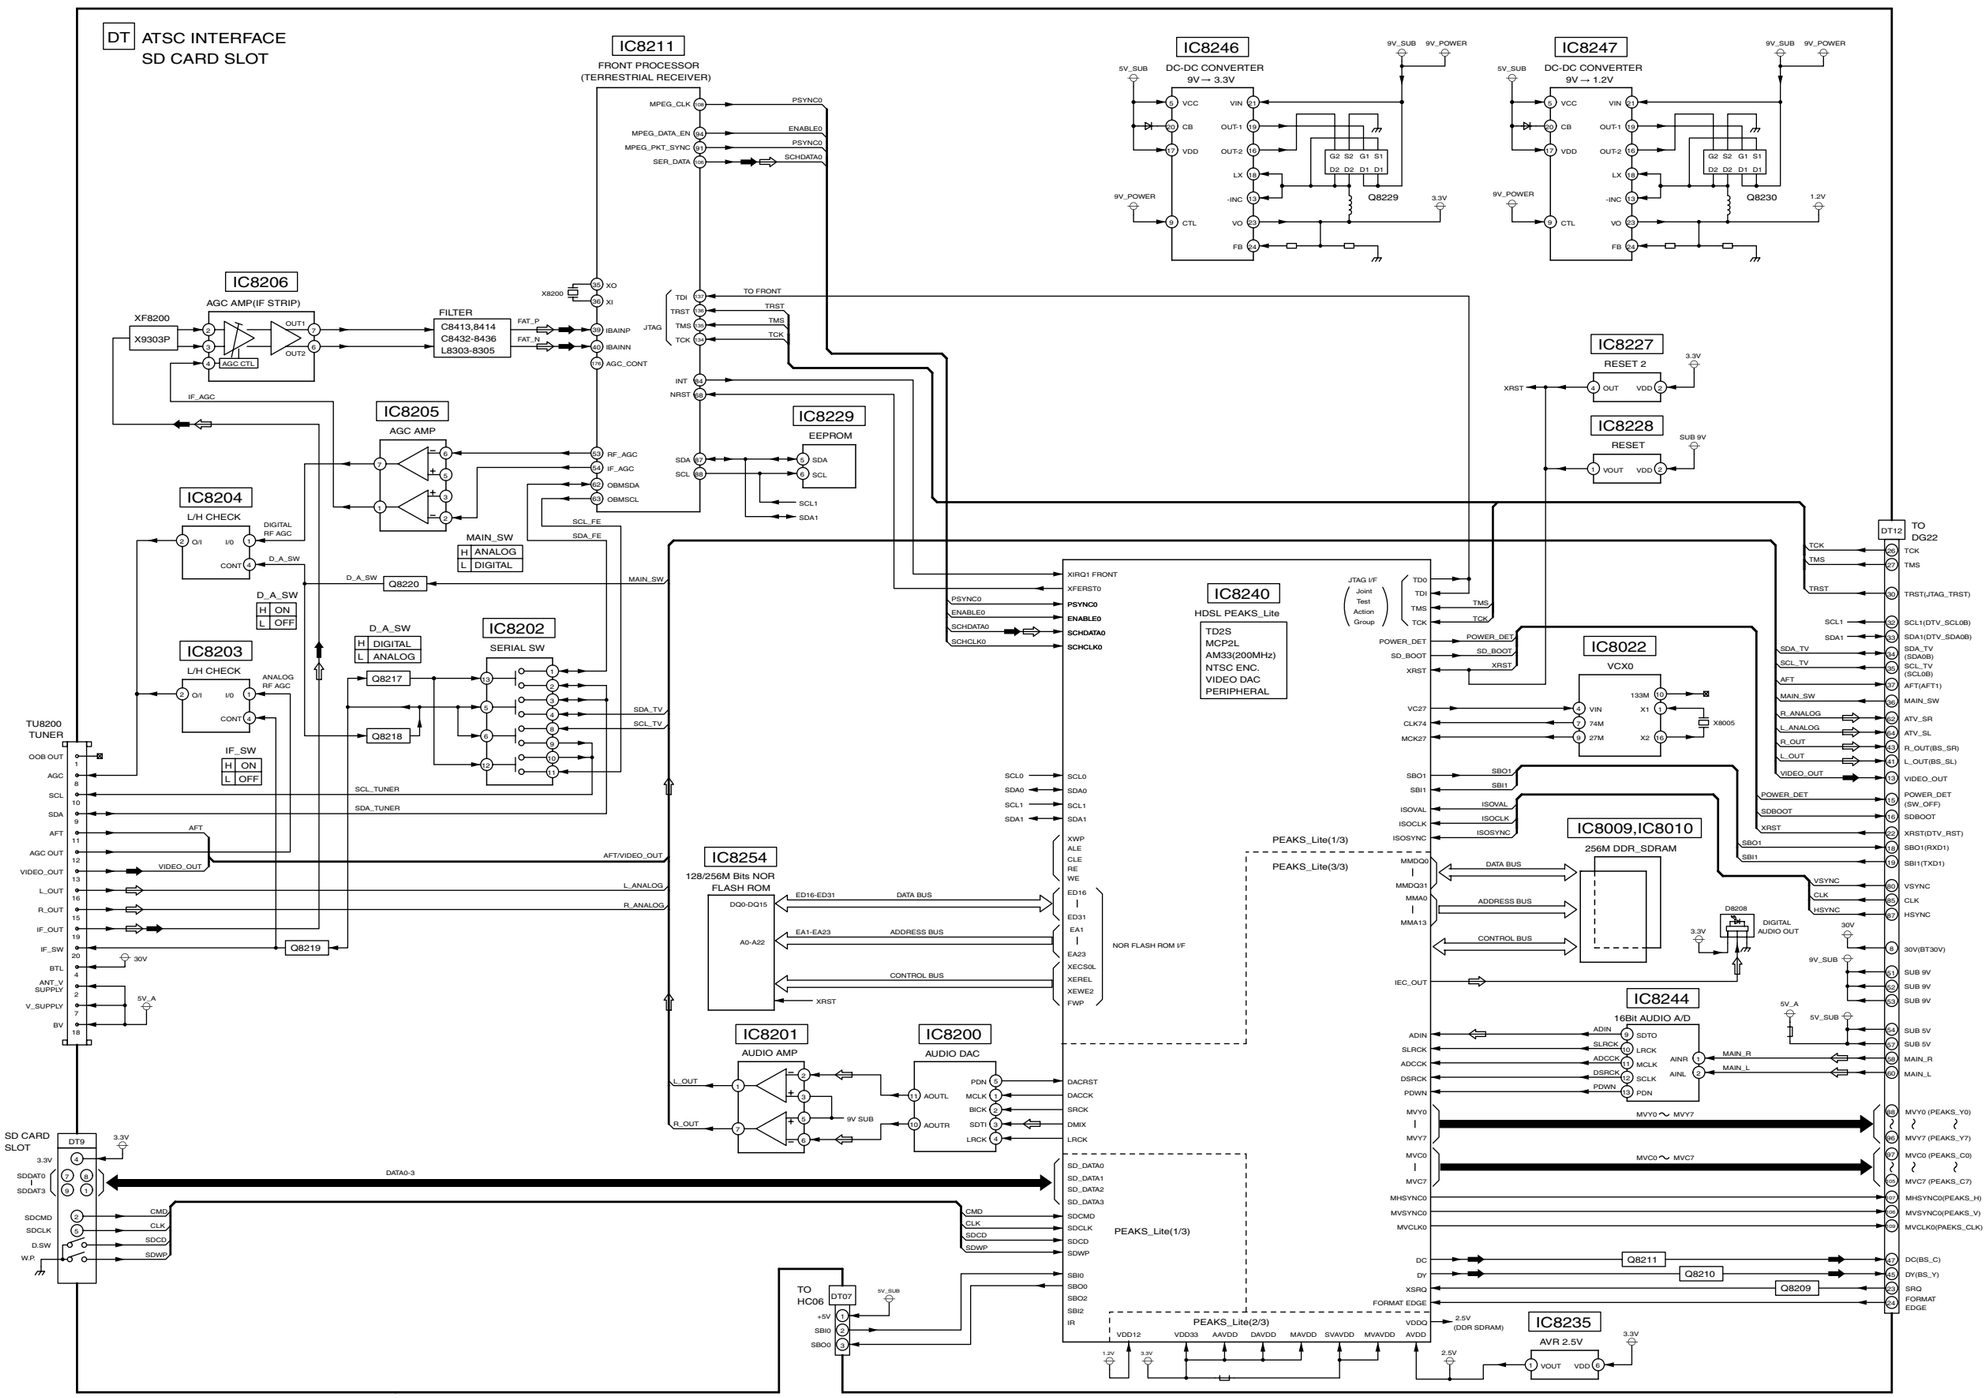


TH-42/50PX6U
DT-Board Block Diagram

TH-42/50PX6U
DT-Board Block Diagram

# 6.21. DT-Board (1 of 6) Schematic Diagram

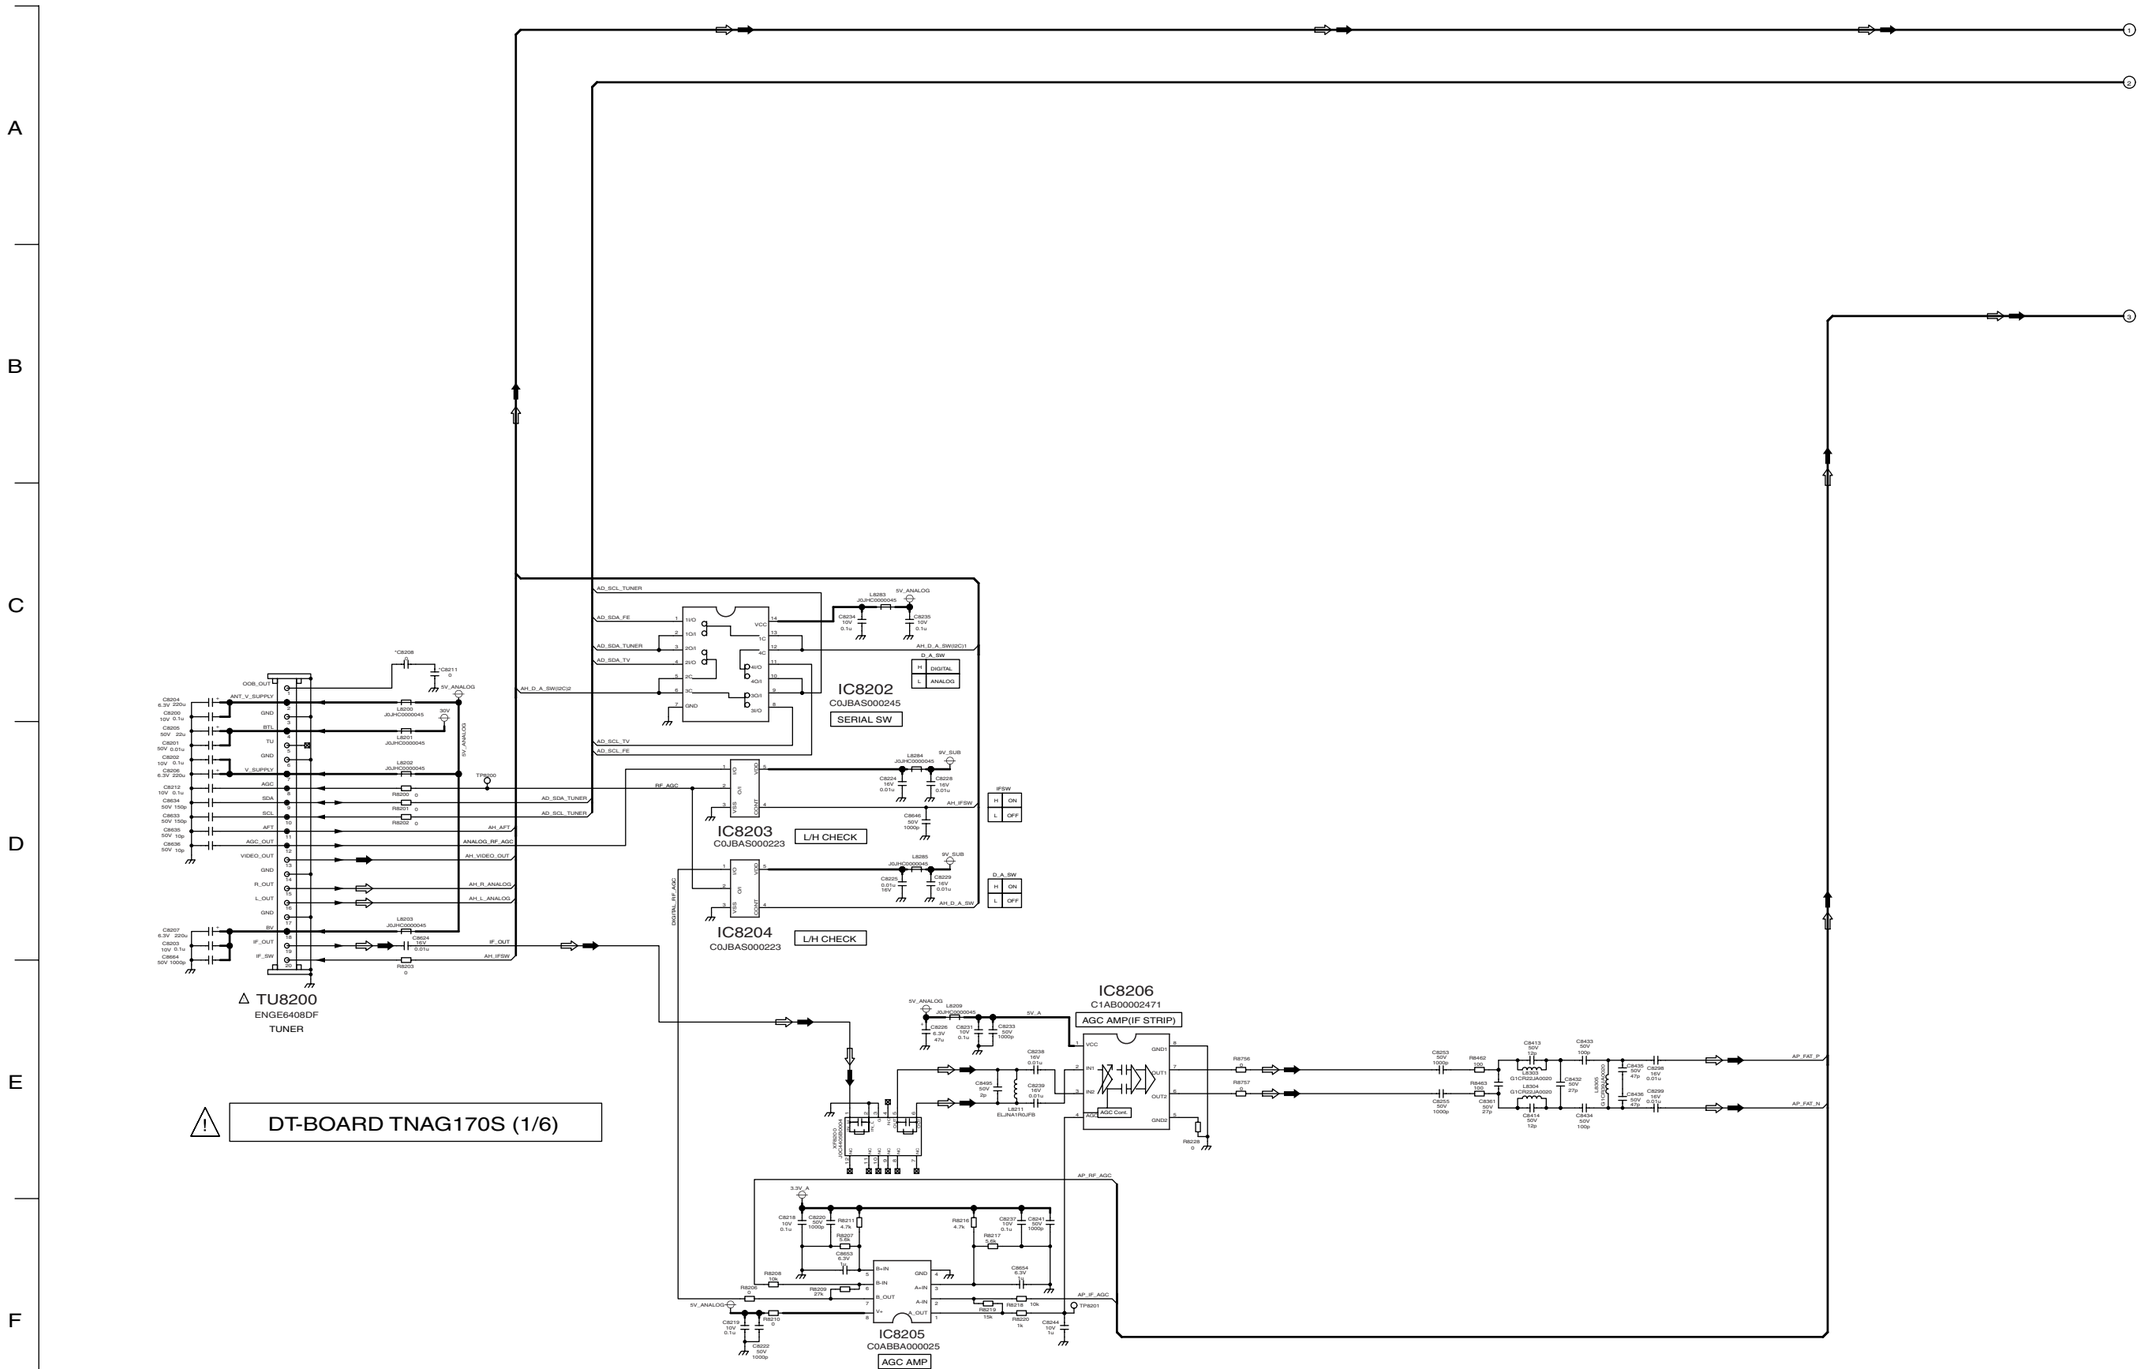


TH-42/50PX6U
DT-Board (1 of 6) Schematic Diagram

TH-42/50PX6U
DT-Board (1 of 6) Schematic Diagram

# 6.22. DT-Board (2 of 6) Schematic Diagram

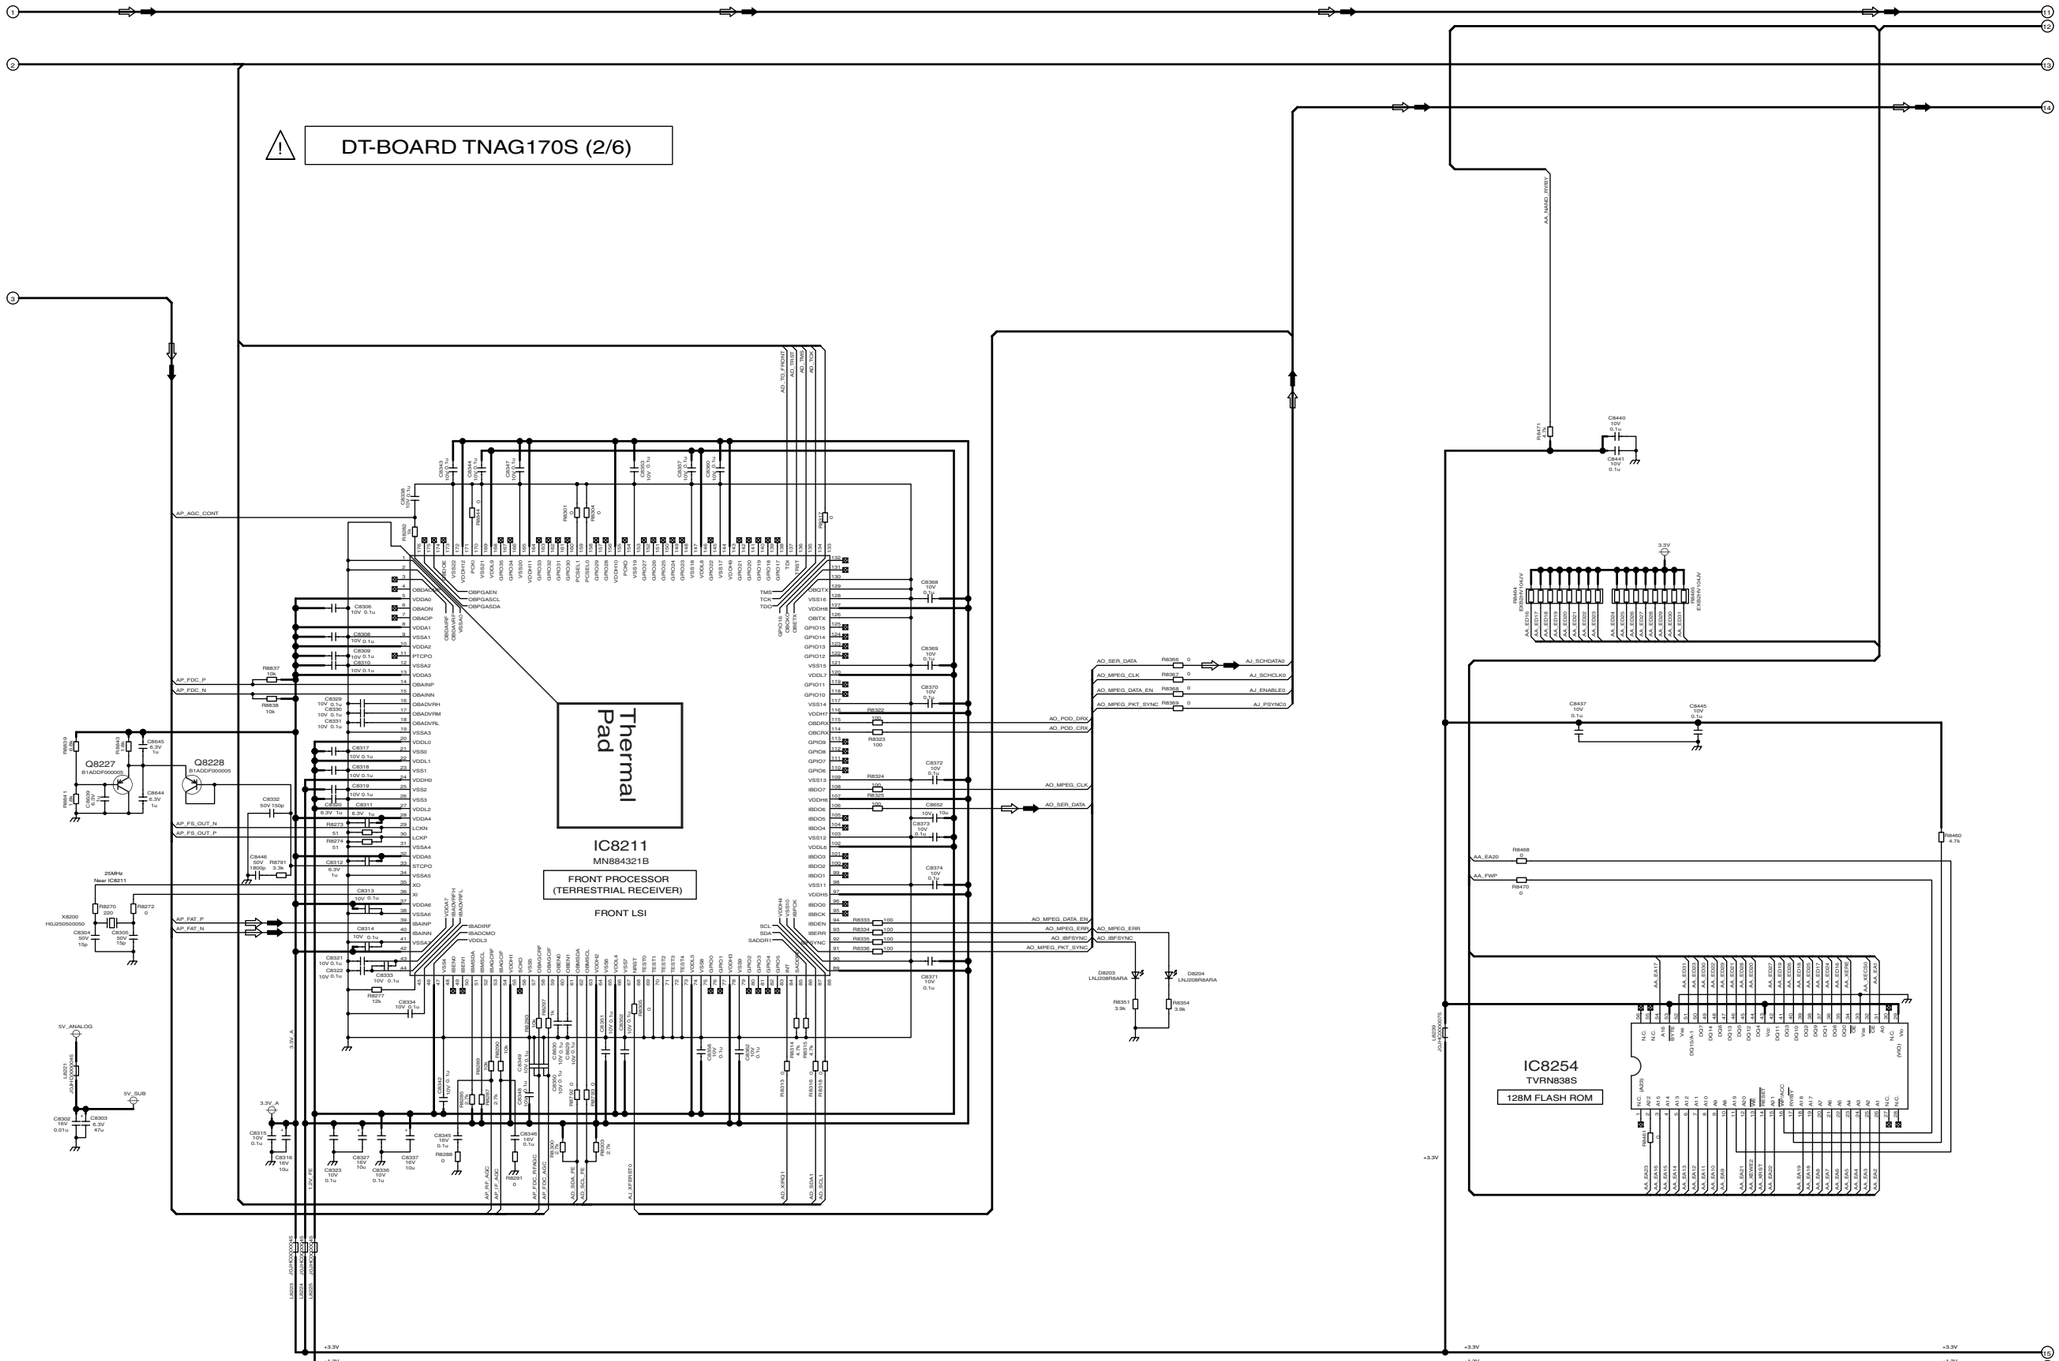


TH-42/50PX6U
DT-Board (2 of 6) Schematic Diagram

TH-42/50PX6U
DT-Board (2 of 6) Schematic Diagram

# 6.23. DT-Board (3 of 6) and GS-Board Schematic Diagram

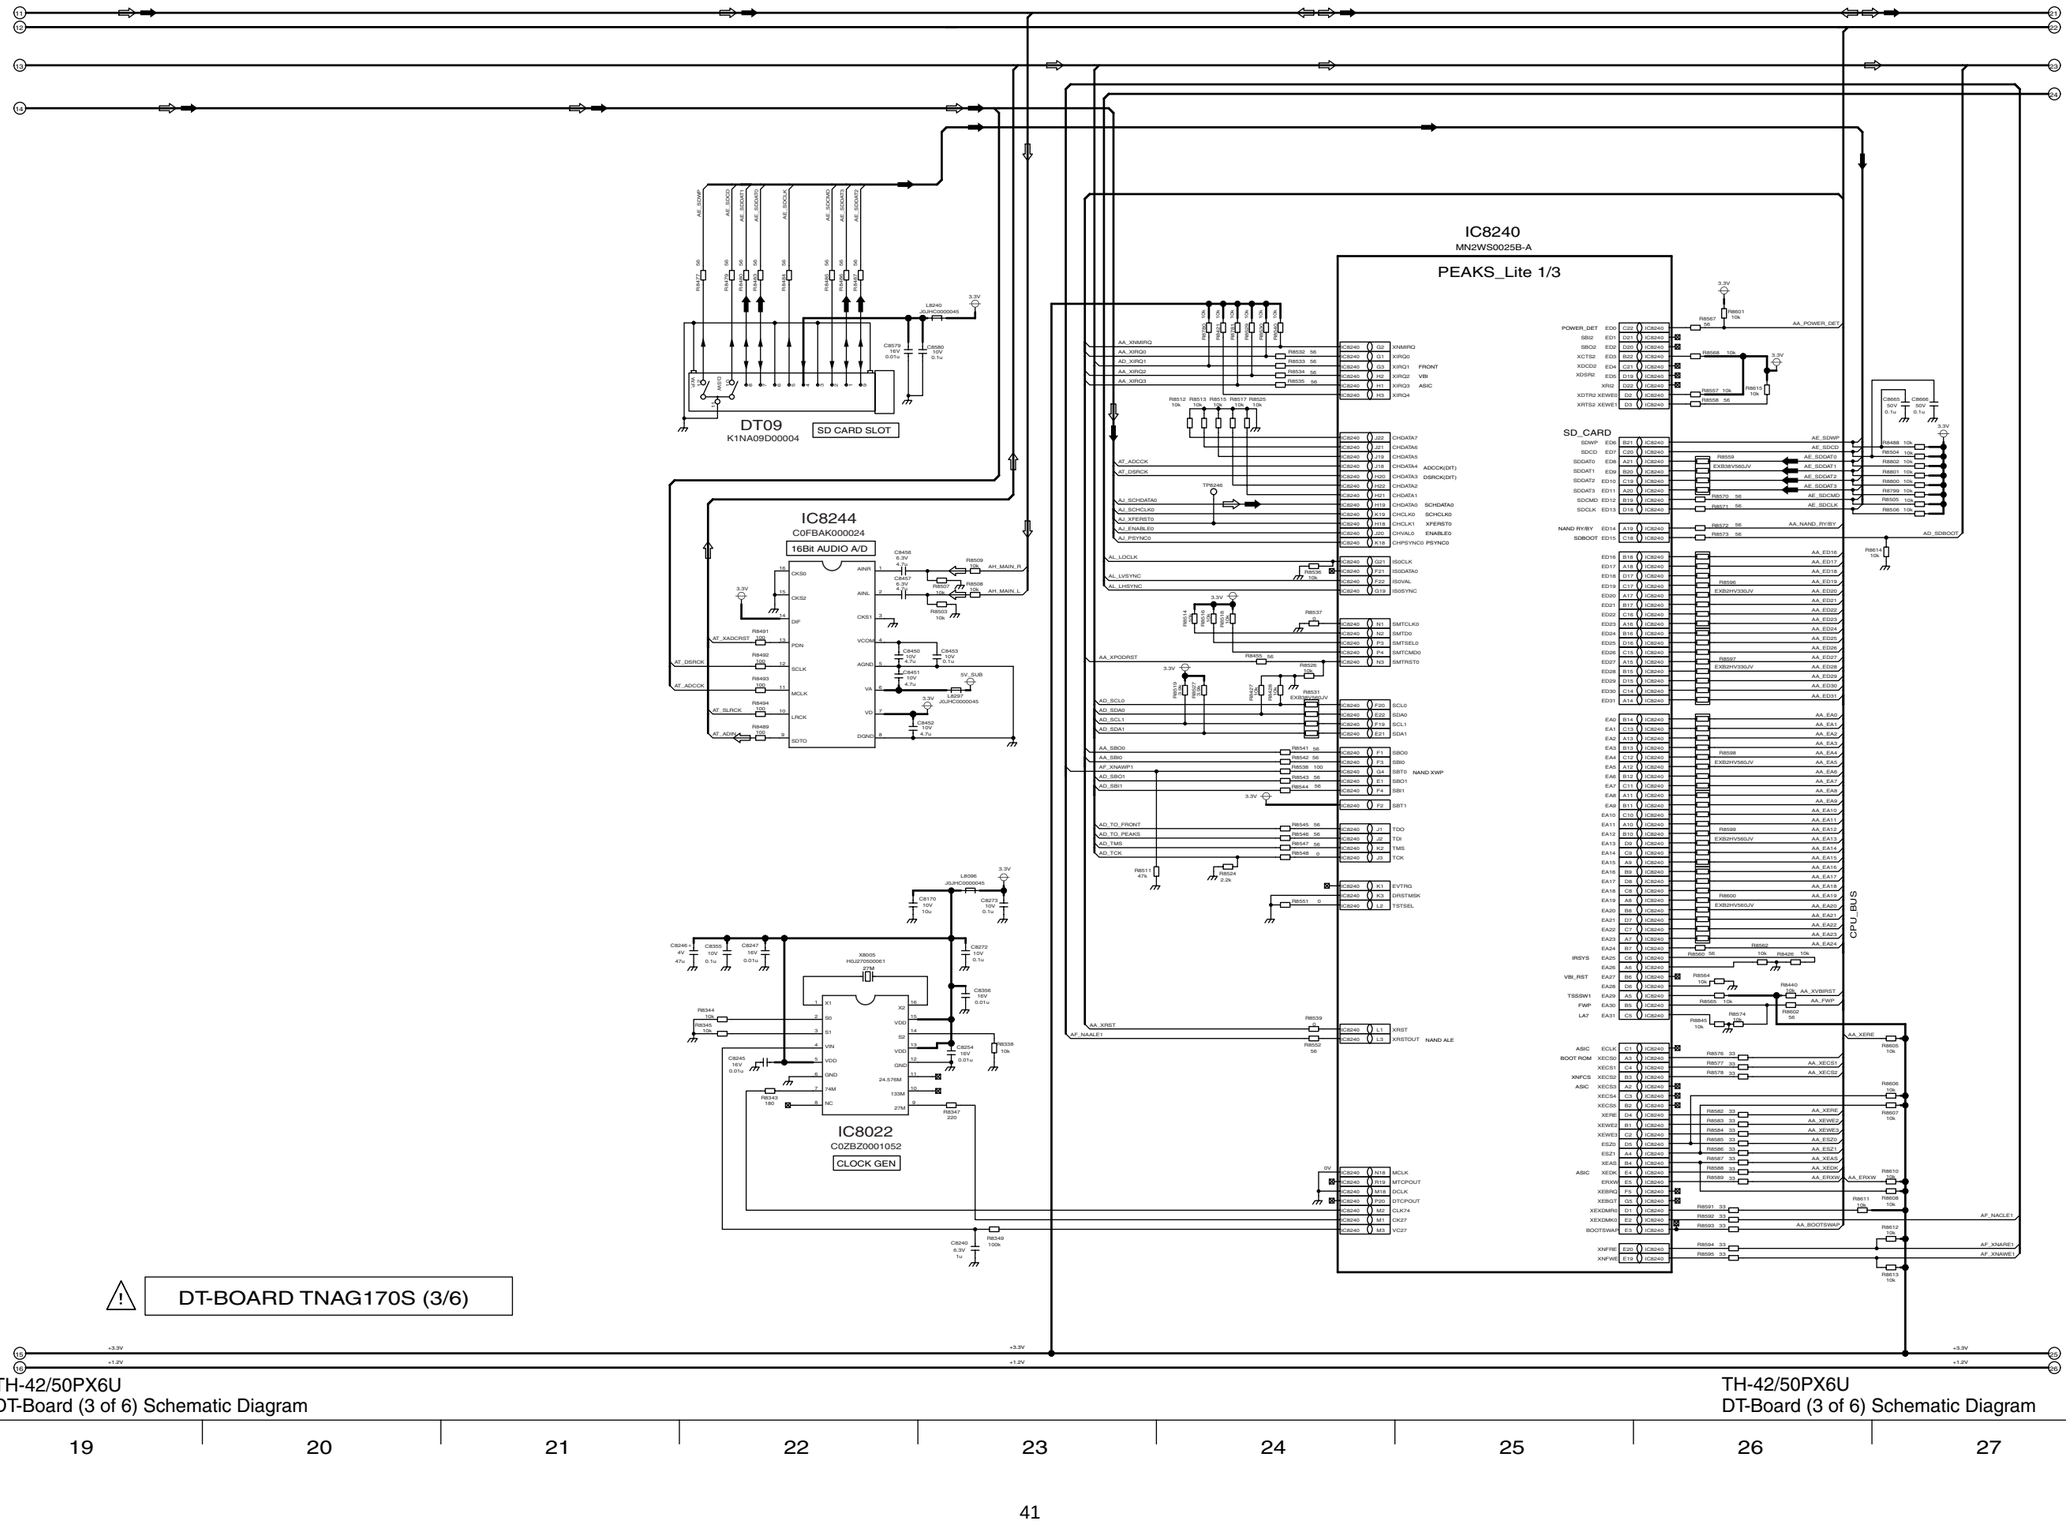

# 6.24. DT-Board (4 of 6) Schematic Diagram

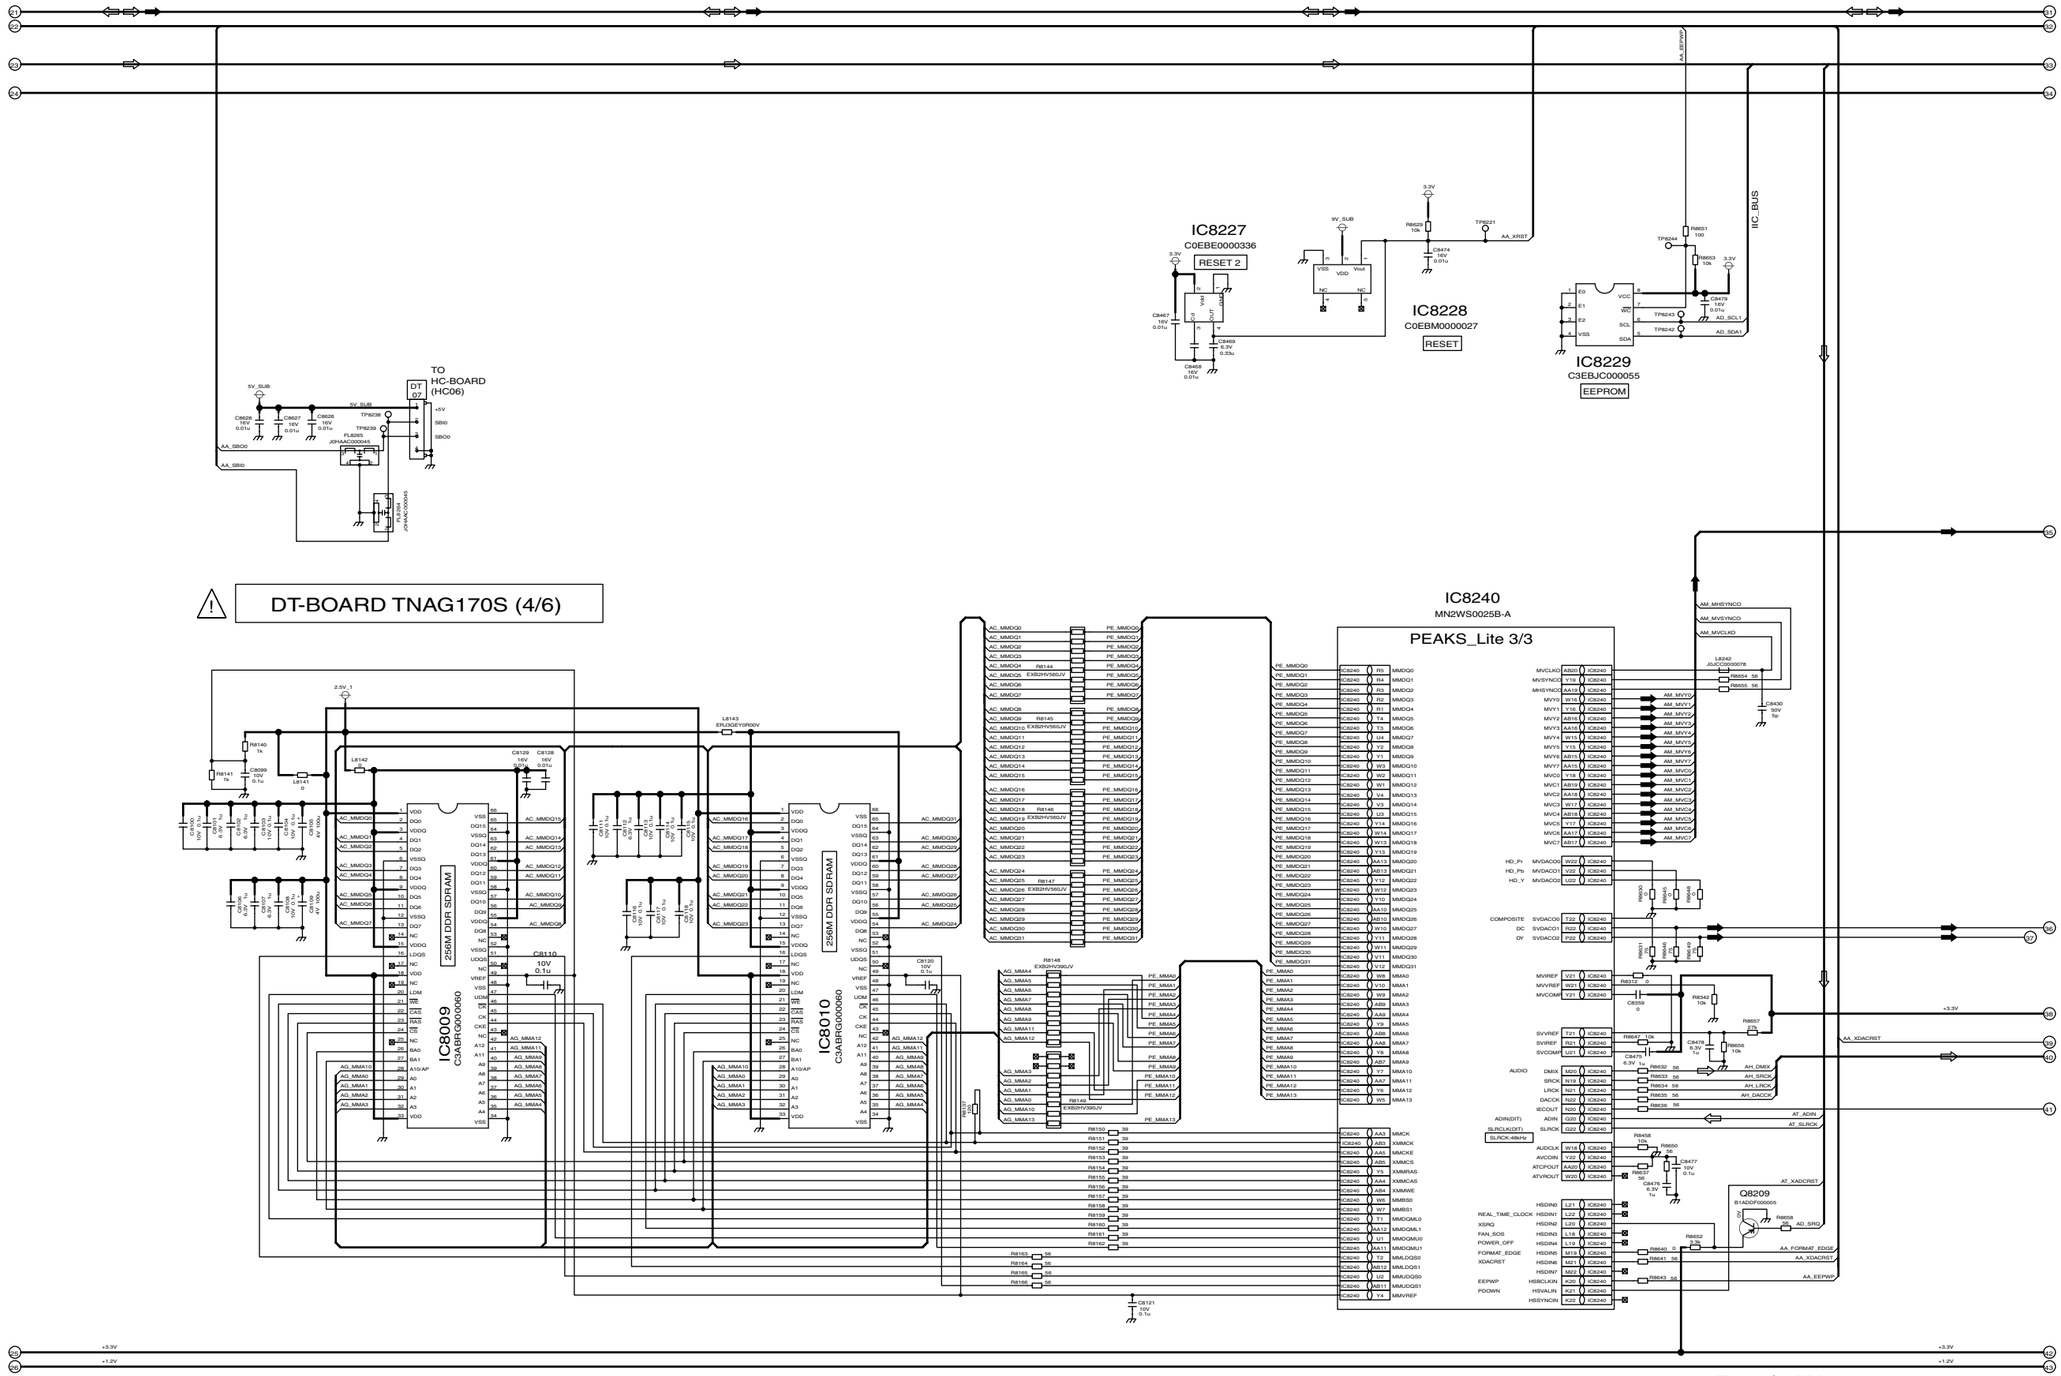

## 6.25. DT-Board (5 of 6) Schematic Diagram

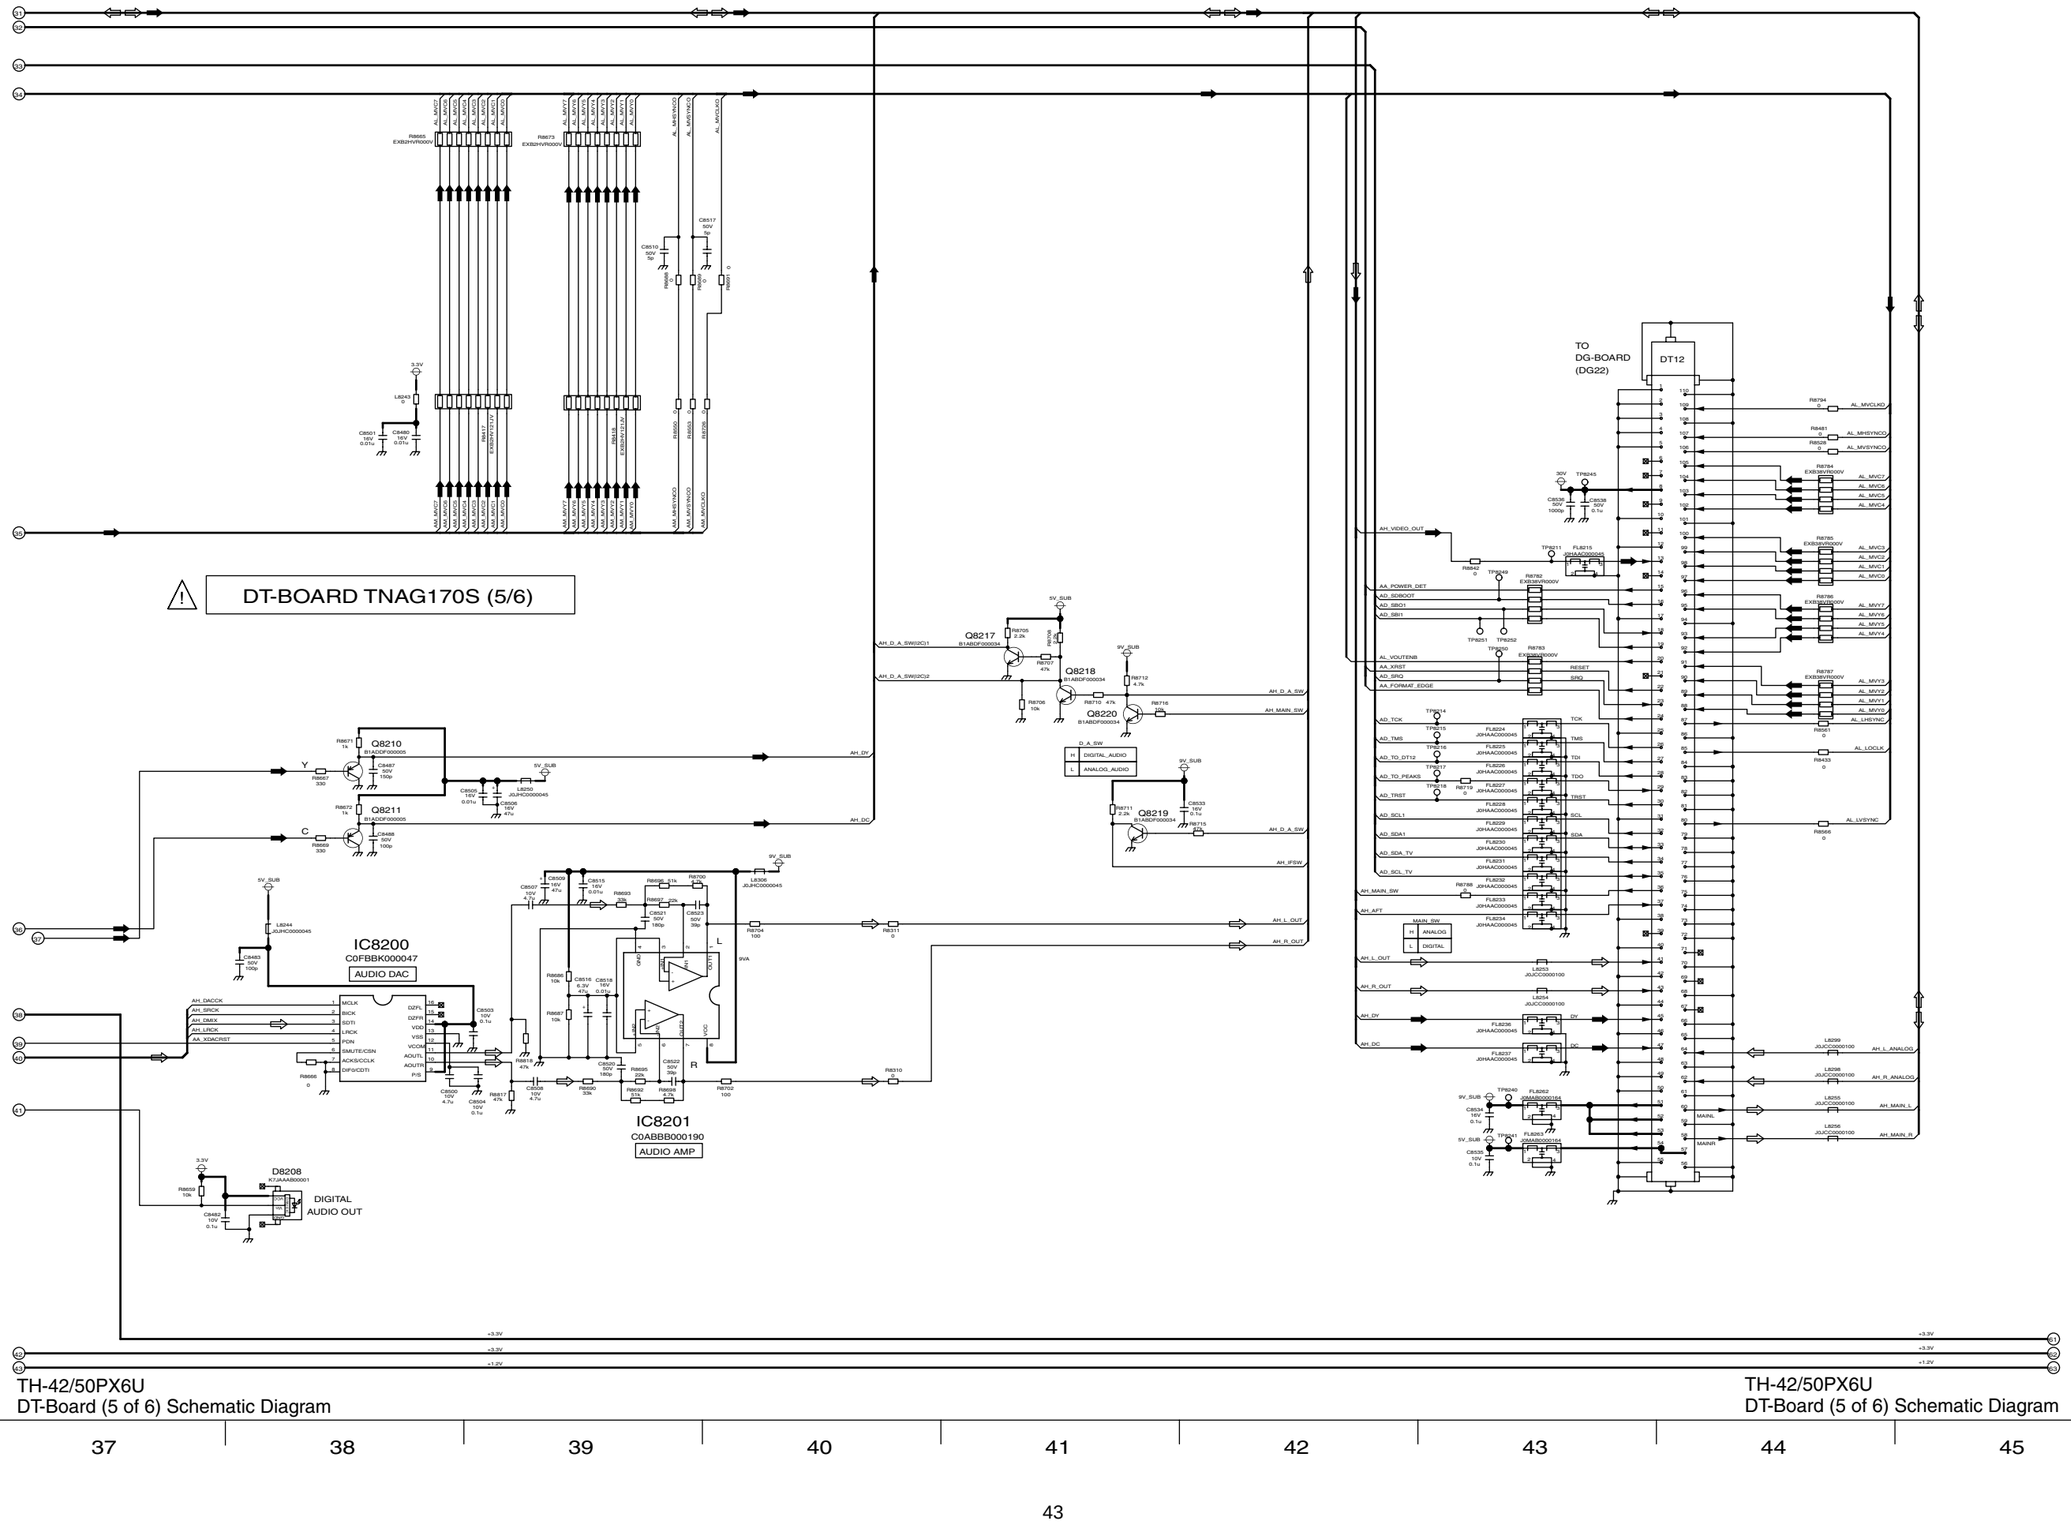


TH-42/50PX6U
DT-Board (5 of 6) Schematic Diagram

TH-42/50PX6U
DT-Board (5 of 6) Schematic Diagram

# 6.26. DT-Board (6 of 6) Schematic Diagram

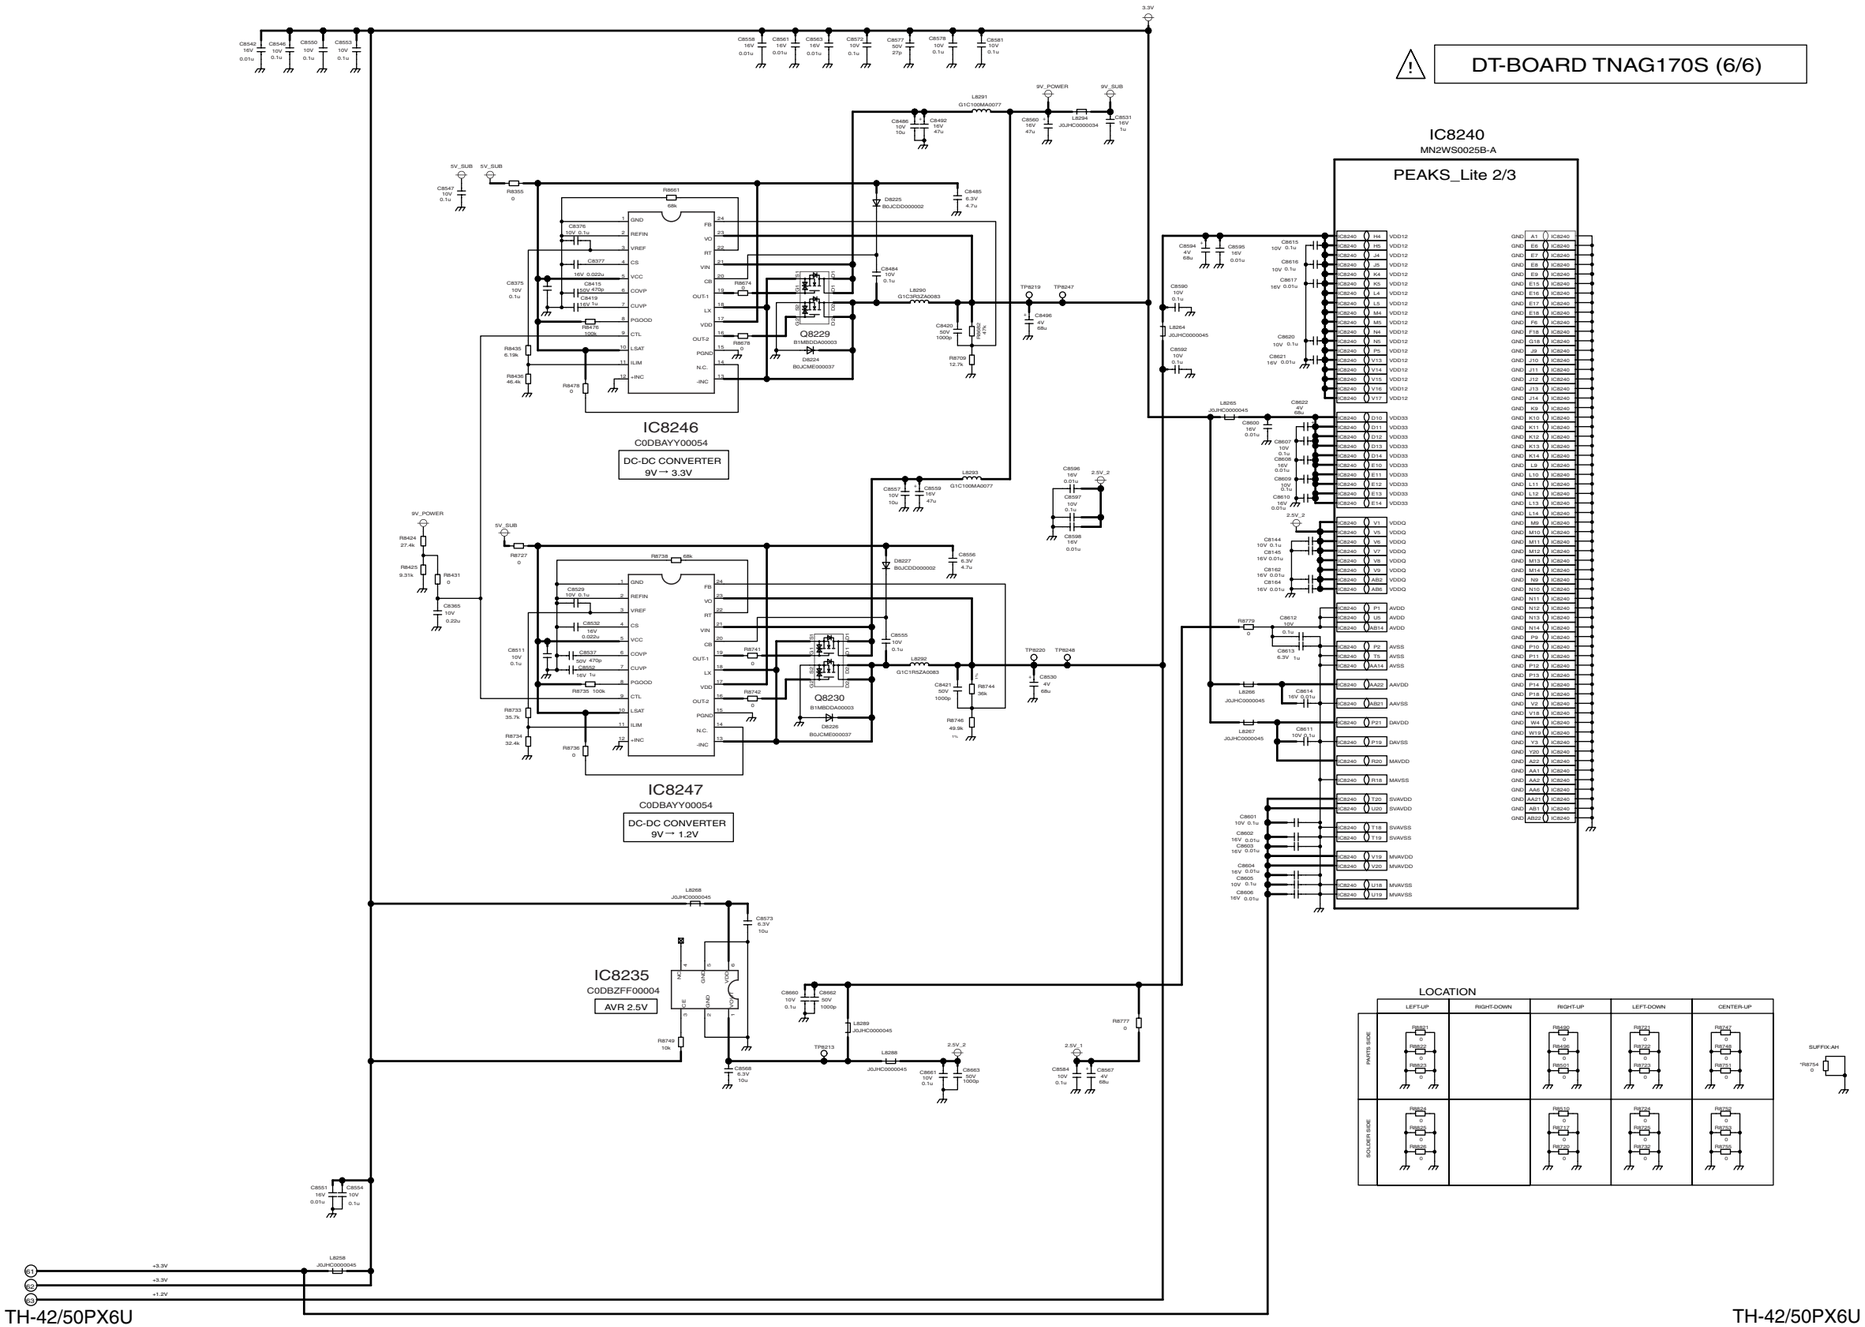

# 7 Parts Location & Mechanical Replacement Parts List

## 7.1. Parts Location (TH-42PX6U)

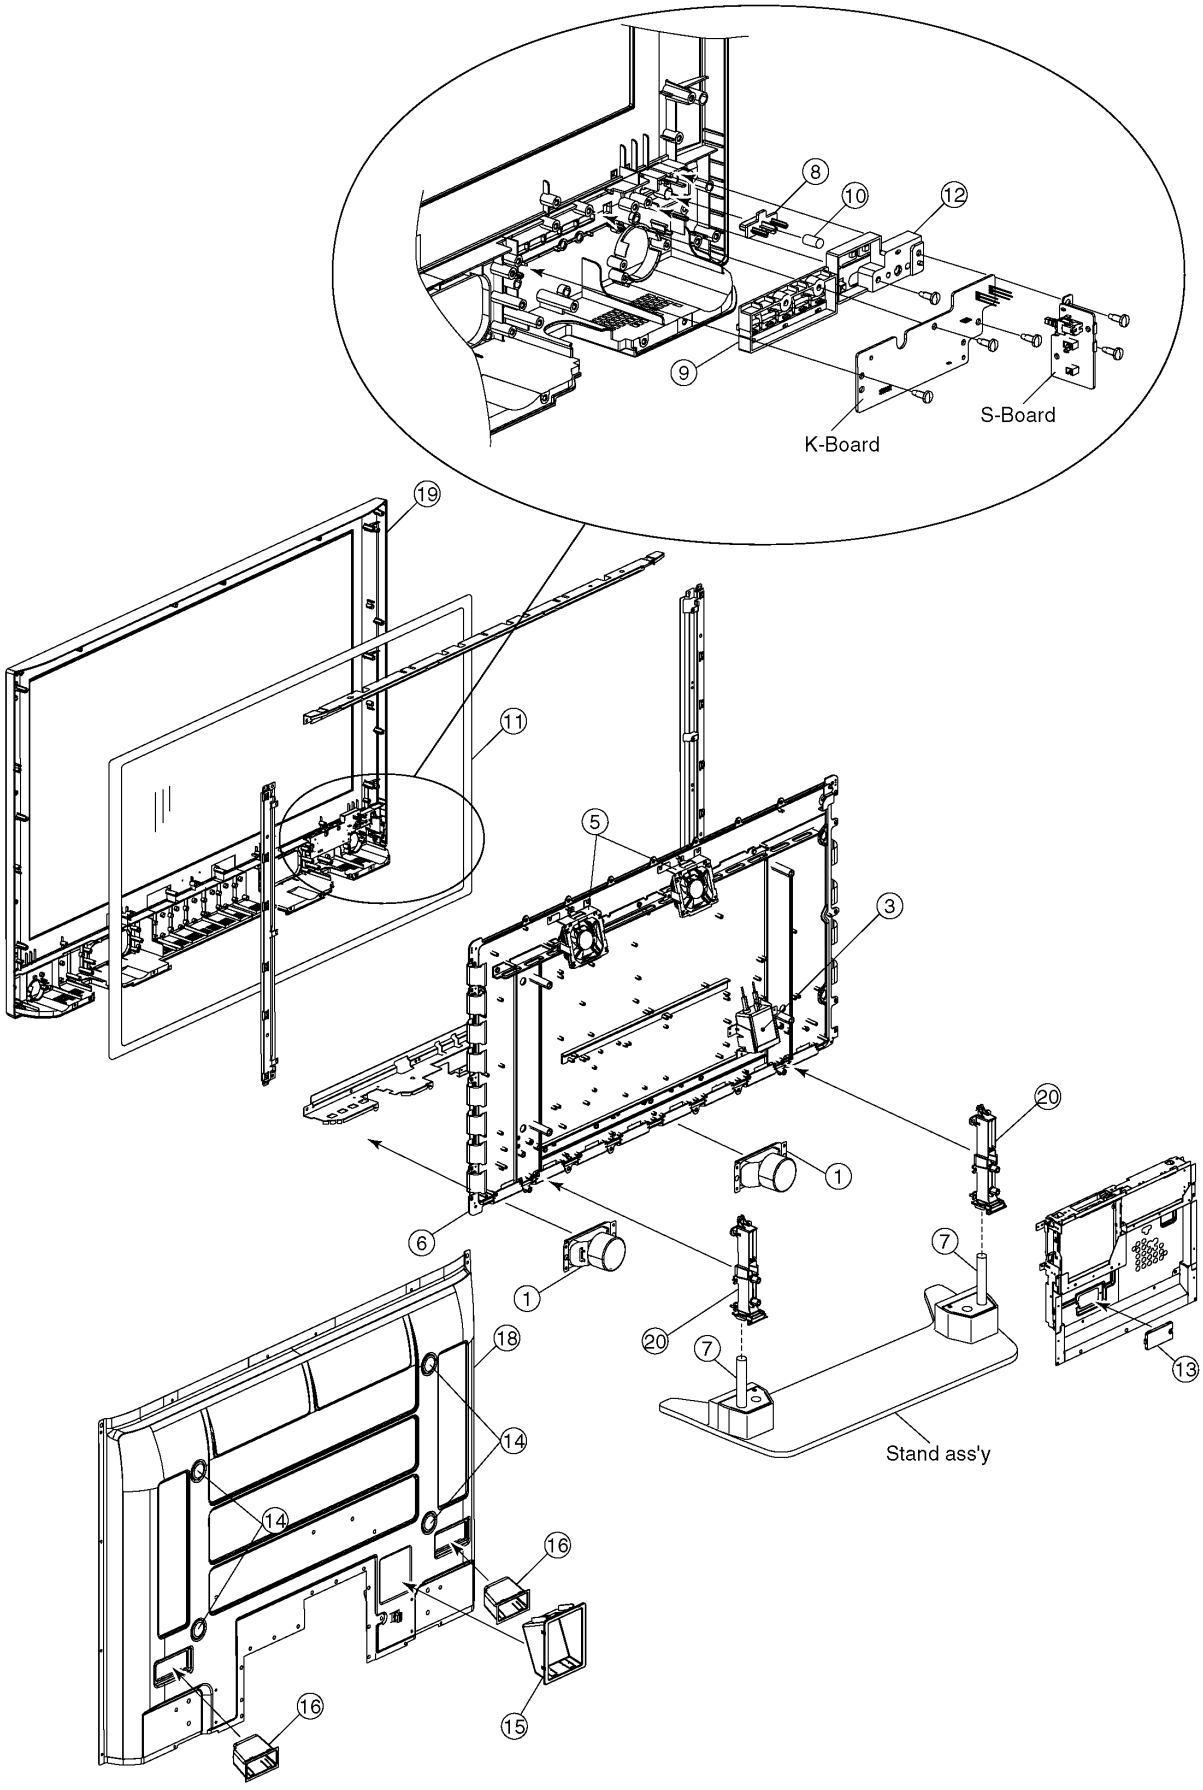

## 7.2. Parts Location (TH-50PX6U)

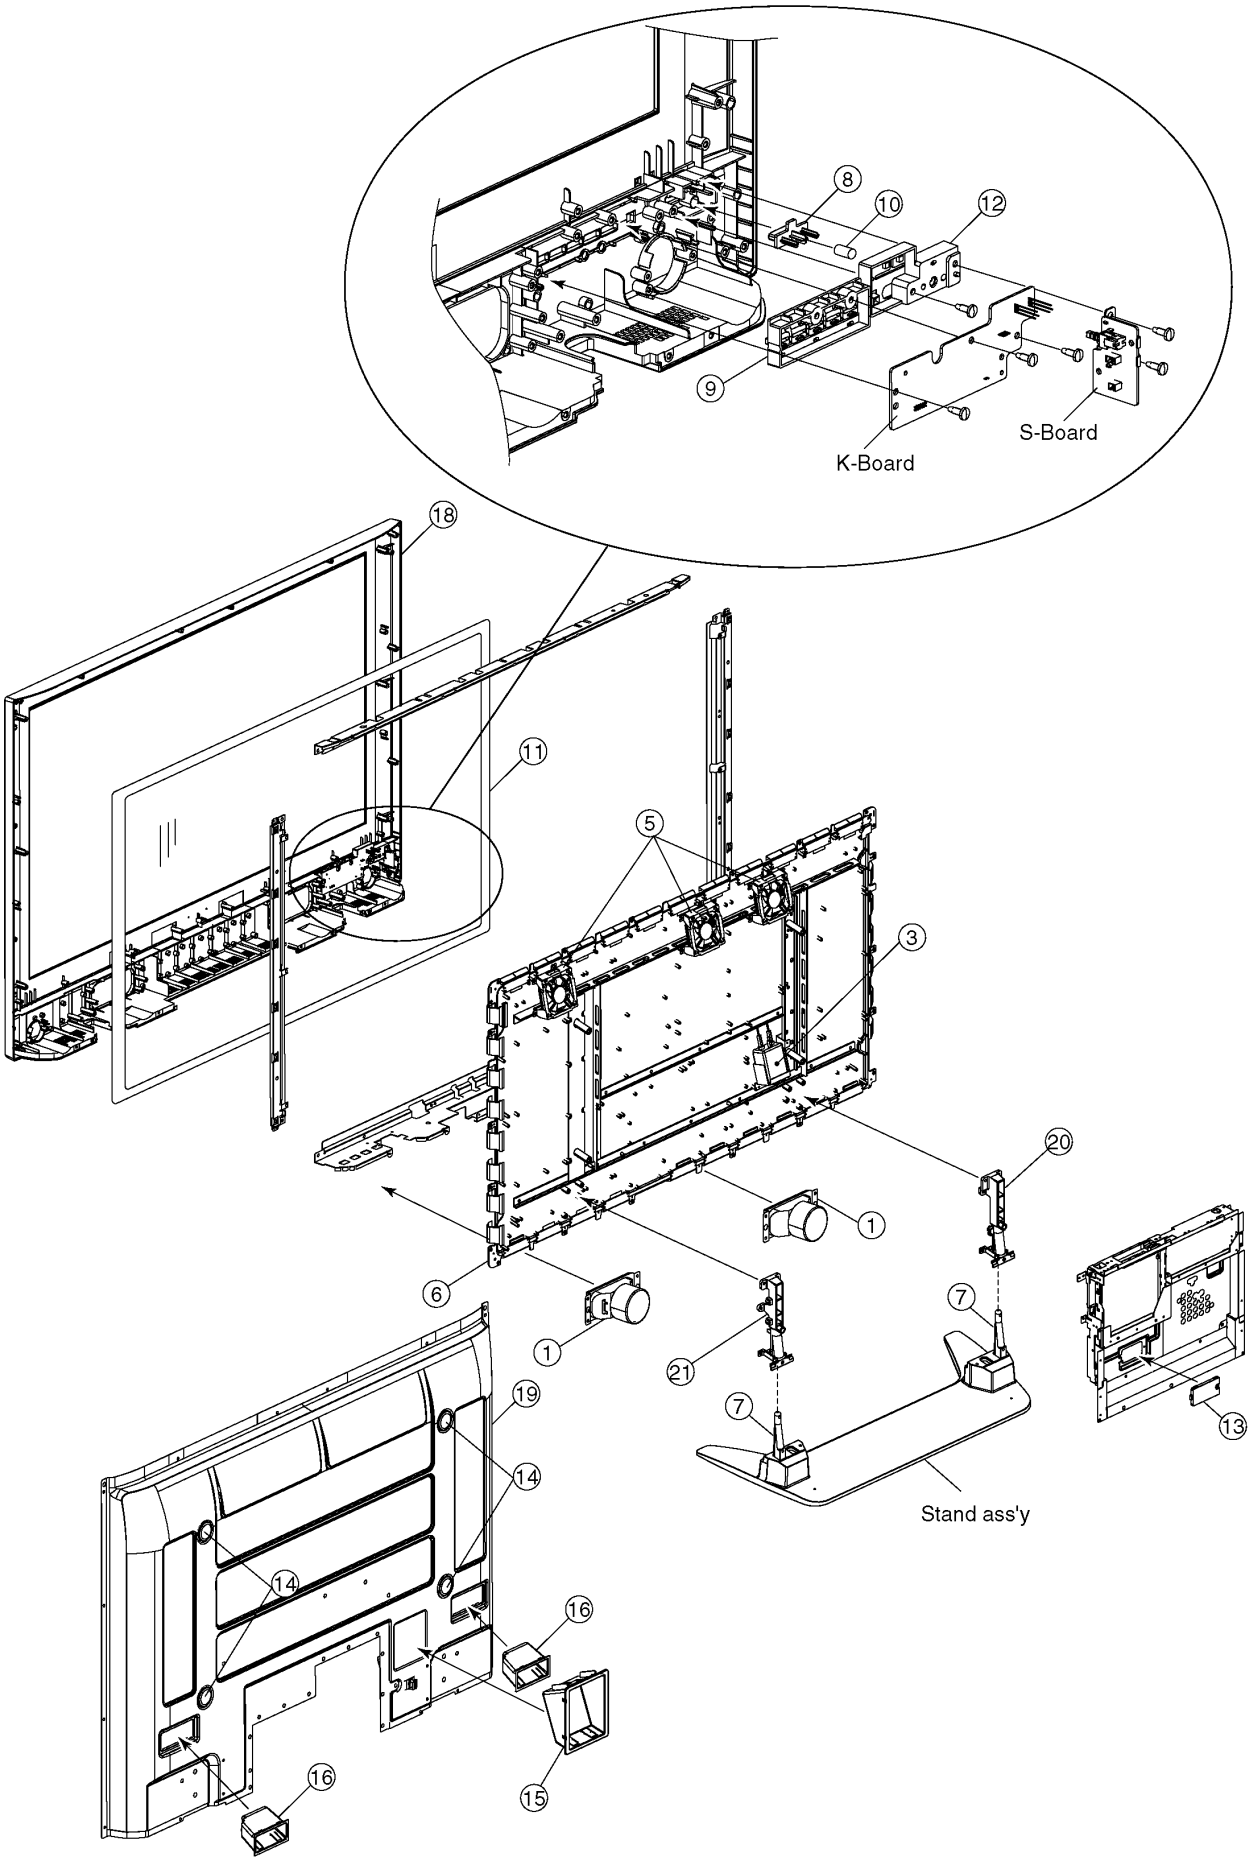

## 7.3. Packing Exploded Views

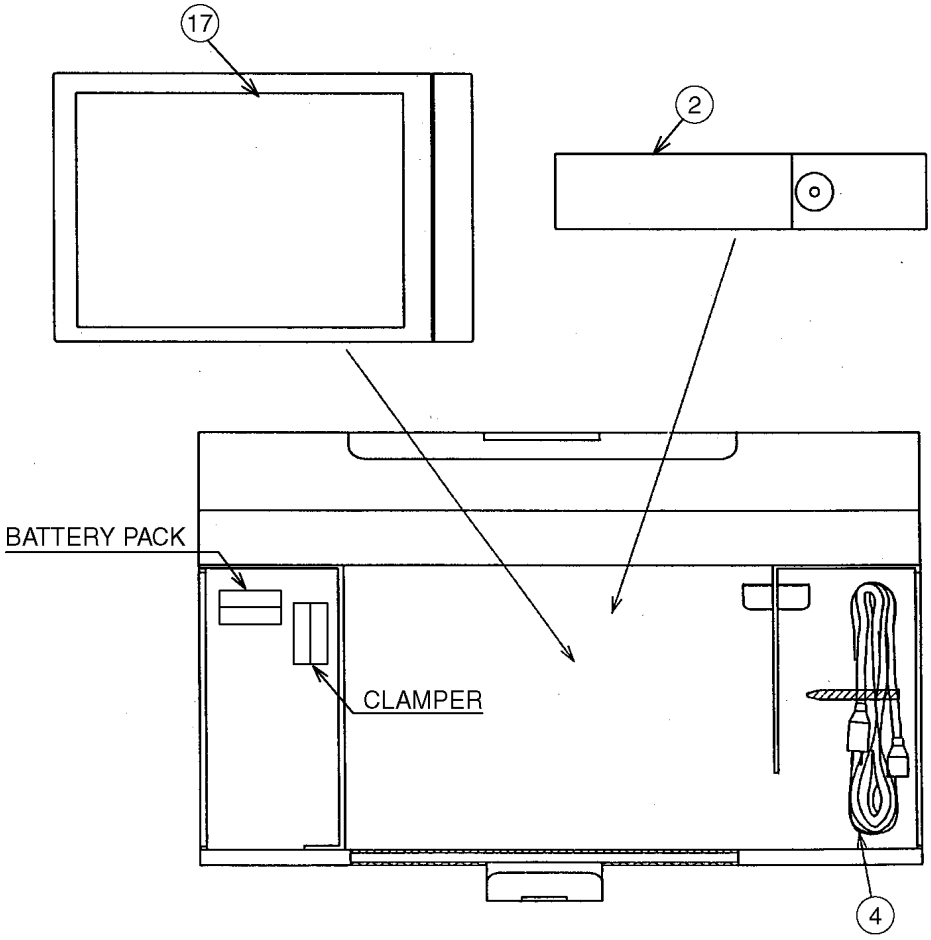

# 7.4. Mechanical Replacement Parts List (TH-42PX6U)

**Note:**

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCA] are supplied by PAVCA.

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| 1 | EAS12S08B | SPEAKER | 2 | |
| 2 | EUR7737Z30 | REMOTE CONTROL | 1 | PAVCA |
| | K1RGZBA00001 | F TERMINAL (5C TYPE) | 1 | |
| 3 | K2AHYH000006 | AC INLET | 1 | PAVCA ⚠ |
| 4 | K2CG3DH00025 | AC CORD | 1 | ⚠ |
| 5 | L6FAYYYH0011 | FAN (80MM) | 2 | |
| 6 | MD42H09A1J | PLASMA DISPLAY PANEL | 1 | |
| | TBL2AX00031 | PACKED PEDESTAL STAND | 1 | PAVCA |
| 7 | TBLA3341 | STAND POLE | 2 | |
| | TBMA207 | PANASONIC BADGE | 1 | PAVCA |
| 8 | TBXA46302 | POWER BUTTON | 1 | |
| 9 | TBXA46402 | 5KEYS BUTTON | 1 | |
| 10 | TES2AA0141 | SPRING | 1 | PAVCA |
| 11 | TKGA5288 | FRONT GLASS | 1 | PAVCA |
| 12 | TKKC5208 | PANEL LIGHT | 1 | |
| 13 | TKP2AA1921 | ADJUSTMENT COVER | 1 | PAVCA |
| 14 | TKP2AA1931 | M8 SPACER CAP | 4 | PAVCA |
| 15 | TKPA94301 | INLET COVER | 1 | |
| 16 | TKRA46201 | REAR COVER HANDLE | 2 | |
| | TMM2AD00601 | M8 SPACER | 4 | PAVCA |
| 17 | TQB2AA0671 | INSTRUCTION BOOK (ENG/SPA) | 1 | PAVCA ⚠ |
| | TSXL513 | CABLE (D31-C11/D32-C21) | 2 | |
| | TSXL519 | CABLE (C12-C22) | 1 | |
| | TSXL520 | CABLE (DG1-H1) | 1 | |
| | TSXL521 | CABLE (DG15-HC15) | 1 | |
| | TSXL522 | CABLE (DG20-PA20) | 1 | |
| | TSXL523 | CABLE (D3-DG3) | 1 | |
| 18 | TXFKU14QSER | REAR COVER | 1 | PAVCA ⚠ |
| 19 | TXFKY05QSER | ESCUTCHEON ASS'Y | 1 | PAVCA ⚠ |
| 20 | TXFMZ01YFSUB | STAND BLOCK ASS'Y | 2 | |
| | TXJ/SPBJTU | SPEAKER LEAD (RELAY-SP) | 2 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

# 7.5. Mechanical Replacement Parts List (TH-50PX6U)

**Note:**

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCA] are supplied by PAVCA.

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| 1 | EAS12S08B | SPEAKER | 2 | |
| 2 | EUR7737Z30 | REMOTE CONTROL | 1 | PAVCA |
| | J0KD00000071 | FERRITE CORE | 1 | |
| | K1RGZBA00001 | F TERMINAL (5C TYPE) | 1 | |
| | K1YD68000002 | 68P CONNECTOR | 1 | |
| | K1YD80000002 | 80P CONNECTOR | 1 | |
| 3 | K2AHYH000002 | AC INLET | 1 | ⚠ |
| 4 | K2CG3DH00025 | AC CORD | 1 | ⚠ |
| 5 | L6FAYYYH0011 | FAN (80MM) | 3 | |
| 6 | MD50H09A1J | PLASMA DISPLAY PANEL | 1 | |
| | TBL2AX00041 | PACKED PEDESTAL STAND | 1 | PAVCA |
| 7 | TBLA3341 | STAND POLE | 2 | |
| | TBMA149 | PANASONIC BADGE (SILVER) | 1 | |
| 8 | TBXA46302 | POWER BUTTON | 1 | |
| 9 | TBXA46402 | 5KEYS BUTTON | 1 | |
| 10 | TES4G204 | SPRING | 1 | |
| 11 | TKGA5265 | FRONT GLASS | 1 | PAVCA |
| 12 | TKKC5208 | PANEL LIGHT | 1 | |
| 13 | TKP2AA1921 | ADJUSTMENT COVER | 1 | PAVCA |
| 14 | TKP2AA1931 | M8-SPACER CAP | 4 | PAVCA |
| 15 | TKPA94301 | INLET COVER | 1 | |
| 16 | TKRA46201 | REAR COVER HANDLE | 2 | |
| 17 | TQB2AA0671 | INSTRUCTION BOOK (ENG/SPA) | 1 | PAVCA ⚠ |
| | TSXL514 | CABLE (D32-C31) | 1 | |
| | TSXL515 | CABLE (D33-C41) | 1 | |
| | TSXL516 | CABLE (D31-C21) | 1 | |
| | TSXL517 | CABLE (D34-C51) | 1 | |
| | TSXL518 | CABLE (C10-C20/C50-C60) | 2 | |
| | TSXL519 | CABLE (C12-C22) | 2 | |
| | TSXL520 | CABLE (DG1-H1) | 1 | |
| | TSXL521 | CABLE (DG15-HC15) | 1 | |
| | TSXL524 | CABLE (DG3-D3) | 1 | |
| | TSXL525 | CABLE (DG20-PA20) | 1 | |
| 18 | TXFKE01DPTU | ESCUTCHEON ASS'Y | 1 | PAVCA ⚠ |
| 19 | TXFKU15QSER | REAR COVER | 1 | PAVCA ⚠ |
| 20 | TXFMZ01YCSUB | STAND BLOCK ASS'Y (LEFT) | 1 | |
| 21 | TXFMZ02YCSUB | STAND BLOCK ASS'Y (RIGHT) | 1 | |
| | TXJ/SPBJTU | SPEAKER LEAD (RELAY-SP) | 2 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

# 8 Electrical Replacement Parts List

## 8.1. Replacement Parts List Notes

**Important Safety Notice**

*Components identified by ⚠ mark have special characteristics important for safety.*
*When replacing any of these components, use only manufacturer's specified parts.*

**RTL (Retention Time Limited)**

**Note:** The marking (RTL) indicates that the Retention Time is Limited for this item.
After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.
After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W
Type Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V
Type Allowance

| Type | Allowance |
|---|---|
| C : Carbon | F : ±1% |
| F : Fuse | G : ±2% |
| M : Metal Oxide | J : ±5% |
| Metal FIlm | K : ±10% |
| S : Solid | M : ±20% |
| W : Wire Wound | |

| Type | Allowance |
|---|---|
| C : Ceramic | C : ±0.25pF |
| E : Electrolytic | D : ±0.5pF |
| P : Polyester | F : ±1pF |
| Polyprop | G : ±3pF |
| lene | J : ±5pF |
| T : Tantalum | K : ±10pF |
| | L : ±15pF |
| | M : ±20pF |
| | P : +100%, -0% |
| | Z : +80%, -20% |

# 8.2. Electrical Replacement Parts List (TH-42PX6U)

**Note:**

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCA] are supplied by PAVCA.

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| F401.402 | K5D802BNA005 | TIME LAG FUSE HIGH | 2 | ⚠ |
| | | | | |
| C11 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C12 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C21 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C22 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C23 | K1KA12BA0107 | 12P CONNECTOR | 1 | |
| C402 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C404 | F0CAF105A021 | C 1UF, 250V | 1 | ⚠ |
| C407 | EEUEB2W220B | E 22UF, 450V | 1 | ⚠ |
| C408 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C409 | F0CAF225A021 | C 22UF, 250V | 1 | ⚠ |
| C410 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C413 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C414 | ECQU2A473ML | P 0.047UF, M,250V | 1 | ⚠ |
| C421 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C422 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C423 | ECJ2XB1H472K | C 4700PF, K, 50V | 1 | |
| C425 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C426 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C427 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C428 | ECJ2XC1H221J | C 220PF, J, 50V | 1 | |
| C429 | F1E2J4730001 | C 0.047PF, , 600V | 1 | |
| C431 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C432 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C433 | ECJ3XB1E104K | C 0.1UF, K, 25V | 1 | |
| C434 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C436 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C440 | ECA1HM100 | E 10UF, 50V | 1 | |
| C443,44 | F1A3A102A040 | C 1000PF, J, 1KV | 2 | |
| C445 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C446,47 | F2B2W2010001 | C 200UF, 450V | 2 | ⚠ |
| C450 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C451 | F1A3A101A040 | C 100PF, J, 1KV | 1 | |
| C457 | ECWH12333RHV | P 0.013UF,J,1.2KV | 1 | |
| C460,61 | F1A3A331A039 | E 330UF, 1KV | 2 | |
| C462 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C463 | ECJ2XC1H220J | C 22UF, J, 50V | 1 | |
| C467 | ECKCNA221KB7 | C 220PF, M, | 1 | ⚠ |
| C468 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C469 | ECKCNA221KB7 | C 220PF, M, | 1 | ⚠ |
| C470 | F0CAF105A021 | C 1UF, 250V | 1 | ⚠ |
| C473,74 | ECKCNA101KB7 | C 100PF | 2 | ⚠ |
| C476 | ECKCNA101KB7 | C 100PF | 1 | ⚠ |
| C478 | ECKCNA101KB7 | C 100PF | 1 | ⚠ |
| C493 | ECA1HM470 | E 47UF, 50V | 1 | |
| C494 | F2A2E1R00008 | E 1.0UF, 250V | 1 | |
| C497 | ECA1HM470 | E 47UF, 50V | 1 | |
| C501,02 | ECJ2XB1H103K | C 0.01UF, K, 50V | 2 | |
| C503 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C504 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C505 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C506,07 | ECJ2XB1H103K | C 0.01UF, K, 50V | 2 | |
| C508 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C509 | ECA1EHG101 | E 100UF, 25V | 1 | |
| C510 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C511 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C512-14 | ECJ2XC1H471J | C 470PF, J, 50V | 3 | |
| C515 | F2A1A1220011 | E 1200UF, 10V | 1 | |
| C516 | ECJ2XB1C474K | C 0.47UF, Z, 16V | 1 | |
| C517 | F2A1E221A096 | E 220UF, 25V | 1 | |
| C518 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C519 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C520 | ECWH8683RHV | P 0.068PF, J, 8KV | 1 | |
| C523 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C526 | ECJ2XB1H223K | C 0.022UF, K, 50V | 1 | |
| C527 | ECJ3YB1E475K | C 4.7UF, K, 25V | 1 | |
| C528,29 | F1J1C1050011 | C 1UF, Z, 50V | 2 | |
| C530 | ECJ2VB1H333K | C 0.033UF, K, 50V | 1 | |
| C531 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C533 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C534 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C546,47 | ECJ2XB1H102K | C 1000PF, K, 50V | 2 | |
| C550 | ECJ2XC1H331J | C 330PF, J, 50V | 1 | |
| C551,52 | ECJ2XB1H104K | C 0.1UF, K, 50V | 2 | |
| C554 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C555 | F2A2C471A119 | E 470UF, 160V | 1 | ⚠ |
| C556,57 | EEUFC1E152 | E 1500UF, 25V | 2 | |
| C558 | F2A1E471A096 | E 470UF, 25V | 1 | |
| C559 | F2A1A1220011 | E 1200UF, 10V | 1 | |
| C562 | ECJ2XB1H223K | C 0.022UF, K, 50V | 1 | |
| C571 | ECJ2XC1H330J | C 33PF, J, 50V | 1 | |
| C574 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C577 | F2A2A330A022 | E 33UF, 100V | 1 | ⚠ |
| C581 | ECJ2XB1H223K | C 0.022UF, K, 50V | 1 | |
| C583 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C584,85 | ECJ2XB1H223K | C 0.022UF, K, 50V | 2 | |
| C587 | ECJ2XB1H332K | C 3300PF, K, 50V | 1 | |
| C601 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C603 | ECJ2FB1E105K | C 1UF, K, 25V | 1 | |
| C604,05 | F2A2D1510008 | E 150UF, 200V | 2 | ⚠ |
| C607 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C608 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C610 | F1J1C1050011 | C 1UF, Z, 50V | 1 | |
| C611 | F2B2T1420003 | E 142UF, 220V | 1 | ⚠ |
| C612,13 | ECJ2XB1H103K | C 0.01UF, K, 50V | 2 | |
| C615 | F2B2T1420003 | E 142UF, 220V | 1 | ⚠ |
| C616 | F1A3A102A040 | C 1000PF, J, 1KV | 1 | |
| C619 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C620 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C623 | ECA1HM100 | E 10UF, 50V | 1 | |
| C624 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C625 | ECA1HM100 | E 10UF, 50V | 1 | |
| C626 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C627 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C629-31 | ECJ2XB1H103K | C 0.01UF, K, 50V | 3 | |
| C632 | ECJ2XC1H331J | C 330PF, J, 50V | 1 | |
| C634 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C635 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C638,39 | ECJ2XB1H103K | C 0.01UF, K, 50V | 2 | |
| C640 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C641 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C643 | ECA1HM470 | E 47UF, 50V | 1 | |
| C650 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C653 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C654 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C655,56 | ECJ3YB1E225K | C 2.2UF, K, 25V | 2 | |
| C657 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C658 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C659 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C660 | ECJ2FB1C225K | C 22UF, K, 16V | 1 | |
| C661,62 | ECJ2XB1H103K | C 0.01UF, K, 50V | 2 | |
| C1106 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1111 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1116 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1118-23 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C1125 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1127-32 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C1133,34 | ECJ1XC1H150J | C 15PF, J, 50V | 2 | |
| C1135-42 | ECJ0EB1A104K | C 0.1UF, K, 10V | 8 | |
| C1144-50 | ECJ0EB1A104K | C 0.1UF, K, 10V | 7 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C1151 | ECJ0EB1H101K | C 100PF, K, 50V | 1 | |
| C1152 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1153 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C1154 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1155 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C1156,57 | ECJ1XC1H220J | C 22PF, J, 50V | 2 | |
| C1158 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C1159 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1161 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1167,68 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C1169 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C1170-72 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C1178 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1190 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C1193,94 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C1197 | ECJ0EB1H101K | C 100PF, K, 50V | 1 | |
| C1209 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1211 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C1215 | ECJ1XC1H561J | C 560PF, J, 50V | 1 | |
| C1219 | EEEHP1C100R | C 10PF, J, 16V | 1 | |
| C1221 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C1224 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1226 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C1227 | ECJ0EB1H101K | C 100PF, K, 50V | 1 | |
| C1228-34 | EEEHB1C470P | C 47PF, J, 16V | 7 | |
| C2301 | ECA1EHG471 | E 470UF, 25V | 1 | |
| C2303 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2314 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2317 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2320 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2321 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C2322 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2323,24 | ECJ2FB1E224K | C 22UF, K, 25V | 2 | |
| C2325,26 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C2327 | F1J1H474A757 | C 0.47UF, 50V | 1 | |
| C2328-31 | ECJ2FB1E105K | C 1UF, K, 25V | 4 | |
| C2332,33 | ECA1EHG471 | E 470UF, 25V | 2 | |
| C2334,35 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C2336 | F1J1H474A757 | C 0.47UF, 50V | 1 | |
| C2337,38 | ECJ2FB1E224K | C 22UF, K, 25V | 2 | |
| C2341 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C2342 | ECJ2FB1E105K | C 1UF, K, 25V | 1 | |
| C2373 | ECJ1VF1H104Z | C 0.1UF, Z, 50V | 1 | |
| C2374 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2380 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2382 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2385 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2387 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2393,94 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2401 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2402 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C2403 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2417 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C2512 | ECJ3XB0J106M | C 10UF, M,6.3V | 1 | |
| C2515 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2603 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2606 | ECJ1VB1H332K | C 3300PF, K, 50V | 1 | |
| C2607 | ECJ2FB1C684K | C 68UF, Z, 16V | 1 | |
| C2608 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2609 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2610-14 | ECJ1VF1A105Z | C 1UF, Z, 10V | 5 | |
| C2615 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2616 | ECJ2FB1C684K | C 68UF, Z, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C2617 | ECJ1VB1H332K | C 3300PF, K, 50V | 1 | |
| C2620,21 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2624 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2625 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2626 | TCUY1C225ZFN | C 2.2UF, 16V | 1 | |
| C2632 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2633,34 | TCUY1C225ZFN | C 2.2UF, 16V | 2 | |
| C2636 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C2637 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2642 | ECJ2FB1C474K | C 0.47UF, Z, 16V | 1 | |
| C2643 | ECJ1VB1H152K | C 1500PF, K, 50V | 1 | |
| C2644 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C2645 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2649,50 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2651 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2652 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2656 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2657 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2658 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2660,61 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2662 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2663 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2665,66 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C2667 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2668 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2670 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2672 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2673 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C2675 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2676 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2677 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2678 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2679-82 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C2684 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2685 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2686-89 | ECJ2FB1A105K | C 1UF, K, 10V | 4 | |
| C2694 | ECJ2XB1C154K | C 0.15PF, K, 16V | 1 | |
| C2697,98 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2699 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2700 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2701 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2702 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2703 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2705 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2706 | ECJ1VB1H152K | C 1500PF, K, 50V | 1 | |
| C2707 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2708 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2709 | ECJ2XB1C154K | C 0.15PF, K, 16V | 1 | |
| C2710 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2711 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2712 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2713 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2714 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C2715 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2717 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2718 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2722 | ECJ2FB1C474K | C 0.47UF, Z, 16V | 1 | |
| C2723 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2725,26 | ECA1HHG100 | E 10UF, 50V | 2 | |
| C2727,28 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2729 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C2730 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2731 | ECJ1VF1H104Z | C 0.1UF, Z, 50V | 1 | |
| C2732 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2733 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C2734 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2735 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2737 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2739 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2741 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2743 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2744 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2746 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2747 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2750 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2751-54 | ECJ1VF1A105Z | C 1UF, Z, 10V | 4 | |
| C2756 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2757 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2762 | TCUY1C225ZFN | C 2.2UF, 16V | 1 | |
| C2768-71 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 4 | |
| C2773 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2774 | ECA1HHG100 | E 10UF, 50V | 1 | |
| C2775 | ECA1EHG471 | E 470UF, 25V | 1 | |
| C2777,78 | TCUY1C225ZFN | C 2.2UF, 16V | 2 | |
| C2779,80 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2783 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2784,85 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2790 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2791 | F2A1H4700036 | E 47UF, 50V | 1 | PAVCA |
| C2792,93 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2798 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2801 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2802 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C4003-08 | F1J0J1060004 | C 0.010UF, K, 16V | 6 | |
| C4014,15 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C4023 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4026 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4027 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4028 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4112 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4117 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4158 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4159 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4160 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4165 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4168 | ECJ1XC1H680J | C 68PF, J, 50V | 1 | |
| C4171 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C4172,73 | F1H1C104A065 | C 0.1UF, K, 16V | 2 | |
| C4174 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4175 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4176 | ECJ1VB0J225K | C 2.2UF, K, 6.3V | 1 | |
| C4177 | ECJ2FB1C684K | C 68UF, Z, 16V | 1 | |
| C4178 | ECJ1XB1C393K | C 0.039UF, K, 16V | 1 | |
| C4180 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4185,86 | ECJ3XB0J106M | C 10UF, M,6.3V | 2 | |
| C4188 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4189-91 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4199 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4200 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4201 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4204 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4205,06 | F1H1C104A065 | C 0.1UF, K, 16V | 2 | |
| C4208,09 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4211 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4215 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4216 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4217 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4218 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C4219 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4224 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4227 | ECJ1VB1C823K | C 0.082UF, K, 16V | 1 | |
| C4228 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4235 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4244 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4245 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4248 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4253 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4256 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4262-64 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4266 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4269 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4272 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4273 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4281-84 | ECJ0EB1A104K | C 0.1UF, K, 10V | 4 | |
| C4287,88 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4289,90 | EEEHB0J330R | C 33PF, J, 6.3V | 2 | |
| C4291,92 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4296 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4297 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4298-06 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 9 | |
| C4307-09 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4310 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4311 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4313,14 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4315 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4316-18 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4320-22 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4325 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4327 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4329,30 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4331 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4332 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4333-38 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C4339 | ECJ1VB0J225K | C 2.2UF, K, 6.3V | 1 | |
| C4340 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C4341 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C4342 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4343 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C4344,45 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C4346 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4347 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4348 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C4349 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4350,51 | ECJ1XC1H181J | C 180PF, J, 50V | 2 | |
| C4352,53 | ECJ1XC1H330J | C 33PF, J, 50V | 2 | |
| C4354 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4360 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4362 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4363,64 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4365 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4366 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4367 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4371 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4372 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4373 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4374 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4375,76 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C4377 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4379 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4380 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4381,82 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4383 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4384 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4385 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4386 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4387 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4388 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4389 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4390 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4391 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4392 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4393,94 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4395 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4396 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4397,98 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4399,00 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4401 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4402,03 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4404 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4405 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4406 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4407,08 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4409 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4410 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4411,12 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4413,14 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4415 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4417 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4418,19 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4420,21 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4422-24 | ECJ0EB1H102K | C 1000PF, K, 50V | 3 | |
| C4425,26 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4427 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4428 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4429,30 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4434 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4435 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4436-39 | ECJ0EB1H102K | C 1000PF, K, 50V | 4 | |
| C4440 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4441,42 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4447 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4448 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4451 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4452 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4453,54 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4455 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4456 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4457,58 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4459 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4460 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4461 | ECJ1XC1H820J | C 82PF, J, 50V | 1 | |
| C4462 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4464 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4465 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4466 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4467 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C4470 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4474 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4475,76 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4477 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4478 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4479-81 | ECJ0EB1H102K | C 1000PF, K, 50V | 3 | |
| C4482 | ECJ1XC1H180J | C 18PF, J, 50V | 1 | |
| C4483 | ECJ1XC1H150J | C 15PF, J, 50V | 1 | |
| C4493 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4494 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4496 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4497 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C4498 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C4499 | EEFCD0G560ER | 56UF, | 1 | |
| C4501 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4502 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4503 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4504 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4505 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4506 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4507 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4508 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4509-11 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4512 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4513 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4514 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4515,16 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4517 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4518 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4519 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4520 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4521 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4522 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4523 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4524 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4525 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4526 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4527 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4528 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4529 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4530,31 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4532,33 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4534 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4535 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4536 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4537 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C4538 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4539 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4540 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4541 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4544 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5605 | EEUFC1E471 | E 470UF, 25V | 1 | |
| C5606 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5609 | ECA1HM220 | E 22UF, 50V | 1 | |
| C5611 | F2A1H331A257 | E 330UF, 50V | 1 | |
| C5612 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5613 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5616 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5617 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5618,19 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C5622 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5623 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5626 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5633 | ECA1EM221 | E 220UF, 25V | 1 | |
| C5637 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5641-44 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 4 | |
| C5645 | ECA1CHG470 | E 47UF, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C5646 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C5647 | ECA1CHG470 | E 47UF, 16V | 1 | |
| C5648 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C5670 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5672 | ECA1HHG100 | E 10UF, 50V | 1 | |
| C5673 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5801,02 | EEUFC1E471 | E 470UF, 25V | 2 | |
| C5804 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5805 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C5809 | ECJ3XF1E105Z | C 1UF, Z, 25V | 1 | |
| C5810 | ECA1EHG470 | E 47UF, 25V | 1 | |
| C6001 | F1L2J332A022 | C 3300UF, K,6.3V | 1 | |
| C6002 | F1L2J222A022 | C 2200UF, K,6.3V | 1 | |
| C6011-15 | F2A2T201A001 | E 200UF, | 5 | |
| C6021,22 | F1L2J272A022 | C 2700UF, K,6.3V | 2 | |
| C6031 | ECQE2255JF | P 2.5UF, K,250V | 1 | |
| C6041-44 | TCUY1C105ZFN | C 1UF, 16V | 4 | |
| C6091 | F1L2J1020001 | C 1000UF, K,6.3V | 1 | |
| C6111,12 | F2A2D221A022 | E 220UF, 200V | 2 | |
| C6132 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6134,35 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6151 | F1K1E1050001 | C 1UF, Z, 25V | 1 | |
| C6152-55 | F1L1E4750004 | C 4.7UF, 25V | 4 | |
| C6192 | F1K1E1050001 | C 1UF, Z, 25V | 1 | |
| C6194,95 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6201,02 | F0C2E405A176 | E 0.040UF, 250V | 2 | |
| C6211,12 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6213,14 | ECA1EM471 | E 470UF, 25V | 2 | |
| C6221 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6241 | ECA1EM471 | E 470UF, 25V | 1 | |
| C6242 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6243 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6251 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6261,62 | ECA2CM101 | E 100UF, 160V | 2 | |
| C6271 | F1K1E1050001 | C 1UF, Z, 25V | 1 | |
| C6272,73 | EEUFC1E221 | E 220UF, 25V | 2 | |
| C6401 | F1L2J332A022 | C 3300UF, K,6.3V | 1 | |
| C6402 | F1L2J222A022 | C 2200UF, K,6.3V | 1 | |
| C6411-15 | F2A2T201A001 | E 200UF, | 5 | |
| C6421,22 | F1L2J272A022 | C 2700UF, K,6.3V | 2 | |
| C6431 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6472 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6480 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6502 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6504,05 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6511,12 | F0C2E405A176 | E 0.040UF, 250V | 2 | |
| C6521 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6522 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6524,25 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6527 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6561 | F2A1A1010074 | E 100UF, 10V | 1 | |
| C6563 | F2A1A1010074 | E 100UF, 10V | 1 | |
| C6565,66 | ECJ2XB1H103K | C 0.01UF, K, 50V | 2 | |
| C6581 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6582 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6591 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6592 | ECA1EM471 | E 470UF, 25V | 1 | |
| C6593 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C6601,02 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6603 | F1K2J102A014 | C 1000UF, K,6.3V | 1 | |
| C6604 | F2A2V470A020 | E 47UF, 350V | 1 | |
| C6605 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6606 | F1K2J102A014 | C 1000UF, K,6.3V | 1 | |
| C6610 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6611 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6612 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6620 | ECJ3XB2J222K | C 2200PF, K,630V | 1 | |
| C6641 | ECQE2224KF | P 2.2UF, K,250V | 1 | |
| C6661,62 | F1K2J102A014 | C 1000UF, K,6.3V | 2 | |
| C6671 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6681,82 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6683 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6691 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6701-08 | ECJ2XB1H104K | C 0.1UF, K, 50V | 8 | |
| C6721 | ECA1HM101 | E 100UF, 50V | 1 | |
| C6723-25 | F1L1E4750004 | C 4.7UF, 25V | 3 | |
| C6726,27 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C6728 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6752 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6753 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6754 | ECA1VM470 | E 47UF, 35V | 1 | |
| C6755 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6771 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6772,73 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6775 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6776,77 | ECJ2XB1H104K | C 0.1UF, K, 50V | 2 | |
| C6791 | EEUFC1E221 | E 220UF, 25V | 1 | |
| C6795,96 | EEUFC1E221 | E 220UF, 25V | 2 | |
| C6802 | EEUFC1E221 | E 220UF, 25V | 1 | |
| C6803 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6804 | F2A2E100A022 | E 10UF, 250V | 1 | |
| C6805 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6806,07 | ECA2CM101 | E 100UF, 160V | 2 | |
| C6811 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6812 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6822 | F2A2V100A019 | E 10UF, 350V | 1 | |
| C6823 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6841,42 | ECA2CM101 | E 100UF, 160V | 2 | |
| C6845 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6861 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6862 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6863 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6871 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6872 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6873 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6901 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6902 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6904 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6906 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6908 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6910 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6912 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6914-18 | ECJ2XB1H221K | C 220PF, K, 50V | 5 | |
| C6931 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6932-35 | F1L2E105A013 | E 0.10UF, 25V | 4 | |
| C6951 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6952 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6955 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6957,58 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C6961 | TCUY1C105ZFN | C 1UF, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C6963 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6964-68 | ECJ2XB1H221K | C 220PF, K, 50V | 5 | |
| C6981 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6982-85 | F1L2E105A013 | E 0.10UF, 25V | 4 | |
| C7108 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7110 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7111,12 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7114 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7115 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7116 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7117 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7119 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7121 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7122 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7123 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7124 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7126 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7127 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7130 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7134 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7137,38 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7140 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7141 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7143 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7145 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7146 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7148 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7201 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7203 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7204,05 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7207 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7208 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7209 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7210 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7212 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7214 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7215 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7216 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7217 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7219 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7220 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7223 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7225 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7227 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7229 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7235 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7236 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7238 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7240 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7241 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7244 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9028,29 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C9033,34 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C9035,36 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C9037 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C9039 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9040 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9044-53 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 10 | |
| C9055-57 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 3 | |
| C9058 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9467,68 | ECJ1VF1H103Z | C 0.010UF, Z, 50V | 2 | |
| C9469 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9500-06 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 7 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C9508 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9509 | ECJ1VC1H200J | C 20PF, C, 50V | 1 | |
| C9510 | ECJ1XC1H150J | C 15PF, J, 50V | 1 | |
| C9511 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9512 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9514,15 | ECJ2VF1C105Z | C 1UF, Z, 16V | 2 | |
| C9516-25 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 10 | |
| C9526 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9527-30 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C9531 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9800 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9801 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C9802 | ECJ1XC1H470J | C 47PF, J, 50V | 1 | |
| C9803 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C9804 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9805 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9806 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C9807,08 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9809 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9815,16 | ECGRL0G680ER | C 68PF, J, 4V | 2 | |
| C9817,18 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9822 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9823,24 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9825 | ECJ1XC1H101K | C 100PF, K, 50V | 1 | |
| C9826 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9827 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9830-32 | ECJ3XB1C106M | C 1.0UF, K, 16V | 3 | |
| C9833 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C9837 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C9838 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9839 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C9840 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9841,42 | ECJ2VF1C105Z | C 1UF, Z, 16V | 2 | |
| C9843 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9844 | ECJ1VF1H103Z | C 0.010UF, Z, 50V | 1 | |
| C9845,46 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C9847,48 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C9880,81 | ECJ1XB1H102K | C 1000UF, Z, 50V | 2 | |
| C9882 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9883 | ECJ1VB1H822K | C 8200PF, K, 50V | 1 | |
| C9884 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C9885 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C9886 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9887 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9891 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9896 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9897 | ECJ1VB1H822K | C 8200PF, K, 50V | 1 | |
| C9898 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C9899 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C9900-51 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 52 | |
| C9952-54 | EEFCD0G560ER | 56UF, | 3 | |
| C9955-59 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 5 | |
| C9960-64 | ECJ3XB0J106M | C 10UF, M,6.3V | 5 | |
| C9965 | EEFCD0G560ER | 56UF, | 1 | |
| C9966 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9967 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9971 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| | | | | |
| CB1-B8 | K1MN68BA0002 | 68P CONNECTOR | 8 | |
| | | | | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D3 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| D5 | K1KB31BA0064 | 31P CONNECTOR | 1 | |
| D6 | K1KA21A00011 | 21P CONNECTOR | 1 | |
| D20 | K1KA20BA0296 | 20P CONNECTOR | 1 | |
| D25 | K1KA20B00155 | 20P CONNECTOR | 1 | |
| D31,32 | K1MN55BA0094 | 55P CONNECTOR | 2 | |
| D401 | B0FBCT000004 | DIODE | 1 | ⚠ |
| D404 | B0EBKT000007 | DIODE | 1 | ⚠ |
| D407 | MA111 | DIODE | 1 | |
| D411 | B0BB17000009 | DIODE | 1 | |
| D412 | B0HAMM000122 | DIODE | 1 | |
| D415 | B0JAME000099 | DIODE | 1 | |
| D416 | B0HAMP000067 | DIODE | 1 | |
| D417 | B0HAPR000013 | DIODE | 1 | |
| D418 | B0BC8R100013 | DIODE | 1 | |
| D419,20 | B0HAPR000013 | DIODE | 2 | |
| D423 | MA188 | DIODE | 1 | |
| D425 | MA188 | DIODE | 1 | |
| D429 | ERA15-10 | DIODE | 1 | |
| D430 | MA111 | DIODE | 1 | |
| D431,32 | B0JCDD000002 | DIODE | 2 | |
| D433 | B0BC01400033 | DIODE | 1 | |
| D435 | ERA15-10 | DIODE | 1 | |
| D436-38 | MA4200M | ZENER DIODE | 3 | |
| D441 | B0HAMM000122 | DIODE | 1 | |
| D444 | B0HAMM000122 | DIODE | 1 | |
| D445 | MA4360H | ZENER DIODE | 1 | |
| D501 | B0HAPR000012 | DIODE | 1 | |
| D503,04 | MA165 | DIODE | 2 | |
| D505 | B0JAME000099 | DIODE | 1 | |
| D506 | MAZ80470LL | ZENER DIODE | 1 | |
| D507,08 | B0BC7R400023 | DIODE | 2 | |
| D509 | B0JANG000018 | DIODE | 1 | |
| D511 | B0JAML000011 | DIODE | 1 | |
| D512,13 | MA111 | DIODE | 2 | |
| D514 | B0BC6R100025 | DIODE | 1 | |
| D515 | B0BC3R200008 | DIODE | 1 | |
| D516-18 | MA4330M | ZENER DIODE | 3 | |
| D520 | MA111 | DIODE | 1 | |
| D521 | B0JAME000099 | DIODE | 1 | |
| D528,29 | MA153 | DIODE | 2 | |
| D530 | B0BC9R900013 | DIODE | 1 | |
| D531 | B0HBSN000013 | DIODE | 1 | |
| D535 | MA188 | DIODE | 1 | |
| D536 | B0JBSG000026 | DIODE | 1 | |
| D538 | B0BC5R100039 | DIODE | 1 | |
| D539,40 | B0AARR000010 | DIODE | 2 | |
| D542 | MA4200M | ZENER DIODE | 1 | |
| D543 | B0BC01400033 | DIODE | 1 | |
| D544,45 | MA4200M | ZENER DIODE | 2 | |
| D549 | B0BC02500008 | DIODE | 1 | |
| D551 | B0BC01300033 | DIODE | 1 | |
| D555 | B0BC7R400023 | DIODE | 1 | |
| D559 | B0BC7R400023 | DIODE | 1 | |
| D563 | B0BC6R100025 | DIODE | 1 | |
| D569-72 | B0BC02500008 | DIODE | 4 | |
| D574 | MA165 | DIODE | 1 | |
| D575 | MA188 | DIODE | 1 | |
| D579 | MA165 | DIODE | 1 | |
| D582 | MAZ705600F | ZENER DIODE | 1 | |
| D585 | B0BC7R400023 | DIODE | 1 | |
| D586 | B0HAMP000067 | DIODE | 1 | |
| D587 | MA188 | DIODE | 1 | |
| D588 | B0BC3R200008 | DIODE | 1 | |
| D590 | B0BC3R200008 | DIODE | 1 | |
| D596 | ERA15-10 | DIODE | 1 | |
| D598 | B0BC5R100039 | DIODE | 1 | |
| D599 | B0JCND000009 | DIODE | 1 | |
| D600 | B0BC7R400023 | DIODE | 1 | |
| D601 | B0BC5R100039 | DIODE | 1 | |
| D602 | B0BC8R100013 | DIODE | 1 | |
| D1106,07 | MA729 | DIODE | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D1109 | B0JCCE000008 | DIODE | 1 | |
| D1111-13 | MA111 | DIODE | 3 | |
| D1117 | MA3036L | ZENER DIODE | 1 | |
| D1119 | MA704A | DIODE | 1 | |
| D1120 | MA728 | DIODE | 1 | |
| D2309 | MA111 | DIODE | 1 | |
| D2512 | MA8056-M | ZENER DIODE | 1 | |
| D2520 | B3AAA0000770 | LED | 1 | |
| D2524 | MA8056-M | ZENER DIODE | 1 | |
| D2529 | MA8056-M | ZENER DIODE | 1 | |
| D2600-03 | MA111 | DIODE | 4 | |
| D2617 | MA152 | DIODE | 1 | |
| D2619-24 | MA8140M | ZENER DIODE | 6 | |
| D2640-60 | MA8140M | ZENER DIODE | 21 | |
| D2661 | MA3X78900L | ZENER DIODE | 1 | |
| D2662 | B0BC03900015 | ZENER DIODE | 1 | |
| D2663,64 | MA111 | DIODE | 2 | |
| D2665 | MA8110M | ZENER DIODE | 1 | |
| D4019-38 | EZJZ0V80008B | VARISTOR | 20 | |
| D4041 | EZJZ0V80008B | VARISTOR | 1 | |
| D4044,45 | EZJZ0V80008B | VARISTOR | 2 | |
| D4047,48 | MA3056M | ZENER DIODE | 2 | |
| D4049-52 | B0HCMM000014 | DIODE | 4 | |
| D5606 | B0BC01100001 | ZENER DIODE | 1 | |
| D5607 | B0BC6R600005 | ZENER DIODE | 1 | |
| D5610 | B0BC4R700007 | ZENER DIODE | 1 | |
| D5612 | B0BC3R700006 | ZENER DIODE | 1 | |
| D5634 | MA111 | DIODE | 1 | |
| D5635 | MA3047H | ZENER DIODE | 1 | |
| D5637,38 | MA152 | DIODE | 2 | |
| D5639 | MA3047H | ZENER DIODE | 1 | |
| D5640 | MA3039H | ZENER DIODE | 1 | |
| D5641 | MA152 | DIODE | 1 | |
| D5642 | MA3120M | ZENER DIODE | 1 | |
| D5643 | MA152 | DIODE | 1 | |
| D5644 | MA3068M | ZENER DIODE | 1 | |
| D5646,47 | MA152 | DIODE | 2 | |
| D5649 | MA111 | DIODE | 1 | |
| D5801 | B0JCME000037 | DIODE | 1 | |
| D5804 | MA3120M | ZENER DIODE | 1 | |
| D5805,06 | MA152 | DIODE | 2 | |
| D5807 | MA111 | DIODE | 1 | |
| D6001 | B0HBSN000008 | DIODE | 1 | |
| D6021 | B0HBSN000008 | DIODE | 1 | |
| D6032 | MA111 | DIODE | 1 | |
| D6041 | B0ECHP000003 | DIODE | 1 | |
| D6051 | B0ECHP000003 | DIODE | 1 | |
| D6061,62 | B0HBSN000008 | DIODE | 2 | |
| D6071,72 | B0HBSN000008 | DIODE | 2 | |
| D6081,82 | B0HBSN000008 | DIODE | 2 | |
| D6091 | B0HBSN000008 | DIODE | 1 | |
| D6092 | B0ECHP000003 | DIODE | 1 | |
| D6101-04 | B0JCME000037 | DIODE | 4 | |
| D6131,32 | B0ECHP000003 | DIODE | 2 | |
| D6151-54 | B0ECHP000003 | DIODE | 4 | |
| D6191-93 | B0ECHP000003 | DIODE | 3 | |
| D6211 | B0JCME000037 | DIODE | 1 | |
| D6221 | B0ECHP000003 | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D6222,23 | MA111 | DIODE | 2 | |
| D6251,52 | MA8330M | ZENER DIODE | 2 | |
| D6253 | LNJ301MPUJA | LED | 1 | |
| D6254 | MA8051L | ZENER DIODE | 1 | |
| D6255 | MA111 | DIODE | 1 | |
| D6401,02 | B0HBSN000008 | DIODE | 2 | |
| D6431,32 | B0HBSP000019 | DIODE | 2 | |
| D6441 | B0ECHP000003 | DIODE | 1 | |
| D6451 | B0ECHP000003 | DIODE | 1 | |
| D6461,62 | B0HBSN000008 | DIODE | 2 | |
| D6466 | MA111 | DIODE | 1 | |
| D6471 | B0HBSN000008 | DIODE | 1 | |
| D6472 | B0ECHP000003 | DIODE | 1 | |
| D6477 | MA111 | DIODE | 1 | |
| D6478 | B0HCKS000002 | DIODE | 1 | |
| D6480 | MA111 | DIODE | 1 | |
| D6481,82 | B0HBSN000008 | DIODE | 2 | |
| D6491 | B0HBSP000019 | DIODE | 1 | |
| D6497 | MA111 | DIODE | 1 | |
| D6501,02 | B0ECHP000003 | DIODE | 2 | |
| D6521-24 | B0ECHP000003 | DIODE | 4 | |
| D6581,82 | MA8330M | ZENER DIODE | 2 | |
| D6583 | LNJ301MPUJA | LED | 1 | |
| D6584 | MA8051L | ZENER DIODE | 1 | |
| D6585 | MA111 | DIODE | 1 | |
| D6601 | MA8240M | ZENER DIODE | 1 | |
| D6602 | B0ECHP000003 | DIODE | 1 | |
| D6603 | MA8240M | ZENER DIODE | 1 | |
| D6604 | MA111 | DIODE | 1 | |
| D6605 | MA8051L | ZENER DIODE | 1 | |
| D6606 | B0HCMM000014 | DIODE | 1 | |
| D6607 | MA111 | DIODE | 1 | |
| D6610 | MAZ81500ML | ZENER DIODE | 1 | |
| D6611-14 | MA111 | DIODE | 4 | |
| D6619,20 | B0HCKS000002 | DIODE | 2 | |
| D6621 | B0HDSM000005 | DIODE | 1 | |
| D6623,24 | B0HDSM000005 | DIODE | 2 | |
| D6641,42 | B0HCKS000002 | DIODE | 2 | |
| D6643 | MA111 | DIODE | 1 | |
| D6644 | B0HCKS000002 | DIODE | 1 | |
| D6661 | MA111 | DIODE | 1 | |
| D6662-64 | MA8330M | ZENER DIODE | 3 | |
| D6665 | MA8051L | ZENER DIODE | 1 | |
| D6666,67 | MA111 | DIODE | 2 | |
| D6671 | MA111 | DIODE | 1 | |
| D6682 | B0HCMM000014 | DIODE | 1 | |
| D6683,84 | MA111 | DIODE | 2 | |
| D6686,87 | MA111 | DIODE | 2 | |
| D6701,02 | MA8056H | ZENER DIODE | 2 | |
| D6721 | B0HCKS000002 | DIODE | 1 | |
| D6723,24 | B0JCME000037 | DIODE | 2 | |
| D6725 | B0ECHP000003 | DIODE | 1 | |
| D6726-33 | MA8056H | ZENER DIODE | 8 | |
| D6734 | MA111 | DIODE | 1 | |
| D6752 | B0JCME000037 | DIODE | 1 | |
| D6758 | B0ECHP000003 | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D6760,61 | MA111 | DIODE | 2 | |
| D6771 | B0JCME000037 | DIODE | 1 | |
| D6773 | B0HCKS000002 | DIODE | 1 | |
| D6791 | MA8200M | ZENER DIODE | 1 | |
| D6801,02 | B0JCME000037 | DIODE | 2 | |
| D6803 | MA111 | DIODE | 1 | |
| D6804 | B0ECHP000003 | DIODE | 1 | |
| D6805 | MA111 | DIODE | 1 | |
| D6806 | B0ECHP000003 | DIODE | 1 | |
| D6820-23 | MA111 | DIODE | 4 | |
| D6825 | MA8330M | ZENER DIODE | 1 | |
| D6826 | MA111 | DIODE | 1 | |
| D6841 | B0ECHP000003 | DIODE | 1 | |
| D6842,43 | MA111 | DIODE | 2 | |
| D6859 | B0ECHP000003 | DIODE | 1 | |
| D6860 | B0HCKS000002 | DIODE | 1 | |
| D6861 | MA8051L | ZENER DIODE | 1 | |
| D6862 | MA111 | DIODE | 1 | |
| D6871 | MA8051L | ZENER DIODE | 1 | |
| D6872 | MA111 | DIODE | 1 | |
| D6901,02 | MA8056H | ZENER DIODE | 2 | |
| D6903,04 | B0ECHP000003 | DIODE | 2 | |
| D6951,52 | MA8056H | ZENER DIODE | 2 | |
| D6953,54 | B0ECHP000003 | DIODE | 2 | |
| D9017-19 | MA3033 | ZENER DIODE | 3 | |
| D9020 | MA728 | DIODE | 1 | |
| D9100-03 | B0JCGD000002 | DIODE | 4 | |
| D9105,06 | B0JCGD000002 | DIODE | 2 | |
| D9110 | B0JCGD000002 | DIODE | 1 | |
| D9300,01 | MA152K | DIODE | 2 | |
| D9800 | B0JCME000037 | DIODE | 1 | |
| D9801 | B0JCDD000002 | DIODE | 1 | |
| D9802 | MA728 | DIODE | 1 | |
| D9804 | MA152K | DIODE | 1 | |
| D9807,08 | MA152K | DIODE | 2 | |
| D9811 | MA728 | DIODE | 1 | |
| D9812 | B0JCME000037 | DIODE | 1 | |
| D9813 | B0JCDD000002 | DIODE | 1 | |
| D9814 | B0JCME000037 | DIODE | 1 | |
| D9815 | B0JCDD000002 | DIODE | 1 | |
| | | | | |
| DG1 | K1KY80A00011 | 80P CONNECTOR | 1 | |
| DG2 | K1KA11B00083 | 11P CONNECTOR | 1 | |
| DG3 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| DG5 | K1KB21BA0063 | 21P CONNECTOR | 1 | |
| DG8,G9 | K1FY119D0001 | CONNECTOR | 2 | |
| DG15 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| DG20 | K1MN40B00045 | 40P CONNECTOR | 1 | |
| DG22 | K1KBB0A00009 | CONNECTOR | 1 | |
| | | | | |
| F410 | K5G102B00020 | FUSE | 1 | ⚠ |
| | | | | |
| FL2606,07 | J0HABB000003 | LC FILTER | 2 | |
| FL2609 | J0HABB000003 | LC FILTER | 1 | |
| FL2611 | J0HABB000003 | LC FILTER | 1 | |
| FL4009-11 | J0HABH000012 | LC FILTER | 3 | |
| FL7101 | J0HABH000013 | LC FILTER | 1 | |
| FL7201 | J0HABH000013 | LC FILTER | 1 | |
| FL9300,01 | F1J1E1040022 | C 0.10UF, Z, 25V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| FL9800, 01 | J0HABH000013 | LC FILTER | 2 | |
| FL9803, 04 | J0HABH000012 | LC FILTER | 2 | |
| FL9805-07 | J0HABH000013 | LC FILTER | 3 | |
| FL9900-02 | F1J1E1040022 | C 0.10UF, Z, 25V | 3 | |
| FL9903, 04 | J0HABH000013 | LC FILTER | 2 | |
| | | | | |
| H1 | K1KY80A00011 | 80P CONNECTOR | 1 | |
| H2 | K1KA11AA0105 | 1P CONNECTOR | 1 | |
| H40 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| H53 | K1KA12AA0194 | 12P CONNECTOR | 1 | |
| | | | | |
| HC01 | K1KA21A00011 | 21P CONNECTOR | 1 | |
| HC06 | K1KA07BA0047 | 7P CONNECTOR | 1 | |
| HC15 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| HC21 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| HC22 | K1KA11AA0194 | 11P CONNECTOR | 1 | |
| | | | | |
| IC401 | CNC1S171R | IC | 1 | ⚠ |
| IC402 | C0DAEMB00004 | IC | 1 | |
| IC403-05 | CNC1S171R | IC | 3 | ⚠ |
| IC406 | C0DAZZZ00021 | IC | 1 | |
| IC408 | CNC1S171R | IC | 1 | ⚠ |
| IC409 | MIP2G40MPSCF | IC | 1 | ⚠ |
| IC410 | CNC1S171R | IC | 1 | ⚠ |
| IC411 | C0DAEMB00004 | IC | 1 | |
| IC412 | CNC1S171R | IC | 1 | ⚠ |
| IC501 | C2ABDB000110 | IC | 1 | |
| IC502 | C0EBH0000210 | IC | 1 | |
| IC504 | C0DAEMB00004 | IC | 1 | |
| IC505 | CNC1S171R | IC | 1 | |
| IC506 | C0ZBZ0000878 | IC | 1 | |
| IC507 | CNC1S171R | IC | 1 | |
| IC509 | C0DABZZ00010 | IC | 1 | |
| IC510 | C0DBAZG00034 | IC | 1 | |
| IC512 | C0DAEMB00004 | IC | 1 | |
| IC520 | LSSK0062 | IC | 1 | |
| IC1101 | TVRN840S | IC | 1 | PAVCA |
| IC1102 | TVRN850S | IC | 1 | PAVCA |
| IC1103 | MN103SC50RGL | IC | 1 | |
| IC1105, 06 | C0JBAS000128 | IC | 2 | |
| IC1108 | C0EBF0000354 | IC | 1 | |
| IC1110 | C0CBCAD00016 | IC | 1 | |
| IC1111 | C0EBY0000041 | IC | 1 | |
| IC2302 | C1AB00002451 | IC | 1 | |
| IC2304 | C0ABBA000168 | IC | 1 | |
| IC2306 | C0ABBA000168 | IC | 1 | |
| IC2601 | C1AB00002123 | IC | 1 | |
| IC2602 | AN15862A-VT | IC | 1 | |
| IC2603 | C1BB00001017 | IC | 1 | |
| IC2604 | C1BB00000969 | IC | 1 | |
| IC2607 | C0DBAJB00004 | IC | 1 | |
| IC2608 | C0ABBA000168 | IC | 1 | |
| IC4013 | C0CBCBF00009 | IC | 1 | |
| IC4016 | C0CBCAC00275 | IC | 1 | |
| IC4018 | C0CBCAC00275 | IC | 1 | |
| IC4019 | C1AB00002456 | IC | 1 | |
| IC4022 | TVRN856S | IC | 1 | PAVCA |
| IC4023 | TVRN857S | IC | 1 | PAVCA |
| IC4025 | C0FBBK000038 | IC | 1 | |
| IC4026 | C1AB00002535 | IC | 1 | |
| IC4027 | C0DBFFD00003 | IC | 1 | |
| IC4028 | C0ABBB000230 | IC | 1 | |
| IC4029 | C0CBCAC00282 | IC | 1 | |
| IC4030 | C0CBCBC00190 | IC | 1 | |
| IC4032 | C0DBGYY00052 | IC | 1 | |
| IC4035 | C0CBCAF00031 | IC | 1 | |
| IC4036 | C0JBAP000020 | IC | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| IC4037 | MN84522-A | IC | 1 | |
| IC4038 | C3ABQJ000048 | IC | 1 | |
| IC5601 | N0BG2DE00001 | IC | 1 | |
| IC5602 | EHMDD9851 | LINEAR IC | 1 | |
| IC5604 | C0DBZGC00067 | IC | 1 | |
| IC5801 | C0DBAZF00003 | IC | 1 | |
| IC6131 | C0ZBZ0000895 | IC | 1 | |
| IC6151 | C0ZBZ0001324 | IC | 1 | |
| IC6191 | C0ZBZ0000895 | IC | 1 | |
| IC6211 | C0ZBZ0001325 | IC | 1 | |
| IC6221 | C0DBEMB00005 | IC | 1 | |
| IC6241 | C0JBAZ000005 | IC | 1 | |
| IC6251 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6471 | C0DBEKA00003 | IC | 1 | |
| IC6472 | C0JBAA000377 | IC | 1 | |
| IC6501 | C0ZBZ0000895 | IC | 1 | |
| IC6521 | C0ZBZ0001324 | IC | 1 | |
| IC6561, 62 | C0JBAZ000005 | IC | 2 | |
| IC6581 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6601 | C0ZBZ0001325 | IC | 1 | |
| IC6602 | C0JBAB000715 | IC | 1 | |
| IC6610 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6671 | C0ZBZ0001325 | IC | 1 | |
| IC6681 | C0ZBZ0001325 | IC | 1 | |
| IC6682 | C0JBAA000377 | IC | 1 | |
| IC6721, 22 | C0JBAZ000994 | IC | 2 | |
| IC6724, 25 | C0CBADC00089 | IC | 2 | |
| IC6751 | C0CBADC00089 | IC | 1 | |
| IC6752 | C0ZBZ0001325 | IC | 1 | |
| IC6753 | C0JBAB000715 | IC | 1 | |
| IC6771 | C0CBADC00089 | IC | 1 | |
| IC6772 | C0ZBZ0001325 | IC | 1 | |
| IC6773, 74 | C0JBAA000377 | IC | 2 | |
| IC6791 | N0BF1FB00001 | IC | 1 | |
| IC6801, 02 | C0DBEMB00005 | IC | 2 | |
| IC6821 | C0DBEMB00005 | IC | 1 | |
| IC6841 | C0DBEMB00005 | IC | 1 | |
| IC6861 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6871 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6901-06 | AN16072A-VT | IC | 6 | |
| IC6951-56 | AN16072A-VT | IC | 6 | |
| IC7101-05 | C0JBAZ001120 | IC | 5 | |
| IC7201-05 | C0JBAZ001120 | IC | 5 | |
| IC9001 | TVRN808-1 | IC | 1 | |
| IC9002 | C0ZBZ0001330 | IC | 1 | |
| IC9003 | TVRN805-1 | IC | 1 | |
| IC9007 | TVRN813 | IC | 1 | |
| IC9011 | C0EBF0000431 | IC | 1 | |
| IC9200 | C1ZBZ0003185 | IC | 1 | |
| IC9303 | TVRN819 | # C3FBMD000223 | 1 | |
| IC9500 | C1ZBZ0002599 | IC | 1 | |
| IC9502 | PST9128NR | IC (LOGIC) | 1 | |
| IC9503, 04 | C0JBAZ001120 | IC | 2 | |
| IC9800 | C0DBAYY00054 | IC | 1 | |
| IC9801 | C0DBZFG00066 | IC | 1 | |
| IC9802, 03 | C0JBAZ001120 | IC | 2 | |
| IC9806 | C0DBAHD00011 | IC | 1 | |
| IC9807 | C0DBAYY00054 | IC | 1 | |
| IC9809 | C0DBAYY00054 | IC | 1 | |
| IC9900 | MN84521-A | IC | 1 | |
| IC9901 | C3ABQJ000051 | IC | 1 | |
| | | | | |
| JK2601 | K1U939A00003 | TERMINAL BOARD | 1 | PAVCA |
| JK2603 | K2HA204A0041 | JACK | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| JS1100-02 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |
| JS2300-03 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 4 | |
| JS2319 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| JS2331 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| JS2606, 07 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| JS2614-17 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 4 | |
| JS2619 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| JS2629, 30 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| JS2632-34 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| JS2640-42 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| JS2645-47 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| JS2650, 51 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| JS2654 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| JS2661-63 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 3 | |
| JS2714-25 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 12 | |
| JS4016, 17 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| JS4022-24 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |
| JS4027, 28 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| JS4033-40 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 8 | |
| JS4092 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| JS4104 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| JS4111 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| JS4118 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| JS5600 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| | | | | |
| K1 | K1KY12B00001 | 12P CONNECTOR | 1 | |
| K2 | K1KA02BA0061 | 2P CONNECTOR | 1 | |
| | | | | |
| L403 | EXCELSA35 | BEAD CHOKE | 1 | |
| L404,05 | G0B123K00004 | CHOKE COIL | 2 | ⚠ |
| L410 | ELF17N004A | LINE FILTER | 1 | ⚠ |
| L510 | EXCELDR25C | BEAD CHOKE | 1 | |
| L511 | G0A470ZA0033 | CHOKE COIL | 1 | |
| L512 | ELESE4R7JA | PEAKING COIL | 1 | |
| L513 | EXCELDR25C | BEAD CHOKE | 1 | |
| L514 | G0A100GA0013 | CHOKE COIL | 1 | |
| L1101-04 | J0JHC0000078 | CHIP INDUCTOR | 4 | |
| L1107 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L1109 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2300-03 | G0C330MA0049 | PEAKING COIL | 4 | |
| L2308 | TALL08N3R9MA | INDUCTION COIL | 1 | |
| L2616 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2625 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2632 | G0A2R7ZA0021 | CHOKE COIL | 1 | |
| L2633 | G1C100MA0072 | INDUCTION COIL | 1 | |
| L2634 | G1C470MA0077 | INDUCTION COIL | 1 | |
| L2636 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4023 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4029 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4031 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4038 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4040-46 | J0JHC0000078 | CHIP INDUCTOR | 7 | |
| L4048 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4049 | J0JBC0000080 | CHIP INDUCTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| L4050,51 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4052 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L4053-55 | J0JHC0000078 | CHIP INDUCTOR | 3 | |
| L4056,57 | J0JCC0000077 | CHIP INDUCTOR | 2 | |
| L4060,61 | J0JCC0000077 | CHIP INDUCTOR | 2 | |
| L4065,66 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4068-70 | J0JHC0000078 | CHIP INDUCTOR | 3 | |
| L4071 | J0JBC0000080 | CHIP INDUCTOR | 1 | |
| L4073 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4075,76 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4077 | J0JCC0000077 | CHIP INDUCTOR | 1 | |
| L4078 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5602 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5604 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5606,07 | G0A220GA0002 | CHOKE COIL | 2 | |
| L5609 | G0A220GA0002 | CHOKE COIL | 1 | |
| L5612 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5615 | TALL08N150KA | INDUCTION COIL | 1 | |
| L5621 | G1C330MA0234 | INDUCTION COIL | 1 | |
| L5622,23 | G1C150MA0234 | INDUCTION COIL | 2 | |
| L5624 | G1C330MA0234 | INDUCTION COIL | 1 | |
| L5651 | G0A220GA0002 | CHOKE COIL | 1 | |
| L5801 | G0C101K00023 | PEAKING COIL | 1 | |
| L5802 | TALL08N101KA | INDUCTION COIL | 1 | |
| L6001-03 | G0C1R9KA0147 | PEAKING COIL | 3 | |
| L6011-13 | G0C1R9KA0147 | PEAKING COIL | 3 | |
| L6061-68 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6081-88 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6101,02 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6103 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6104,05 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6211,12 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6221 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6241 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6262 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6271,72 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6401-03 | G0C1R9KA0147 | PEAKING COIL | 3 | |
| L6411-13 | G0C1R9KA0147 | PEAKING COIL | 3 | |
| L6461-68 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6472,73 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6481-88 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6591,92 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6601,02 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6801,02 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6841 | J0JJC0000011 | CHIP INDUCTOR | 1 | |
| L9500 | G1C150KA0038 | INDUCTION COIL | 1 | |
| L9501,02 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L9800 | G1C3R0MA0248 | INDUCTION COIL | 1 | |
| L9801,02 | G1C2R2MA0241 | INDUCTION COIL | 2 | |
| L9810 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| | | | | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| P2 | K1KA02A00626 | 2P CONNECTOR | 1 | |
| P5 | K1KA11AA0194 | 11P CONNECTOR | 1 | |
| P9 | K1KA03A00537 | 3P CONNECTOR | 1 | |
| P10 | K1KA06A00452 | 6P CONNECTOR | 1 | |
| P11 | K1KA02A00626 | 2P CONNECTOR | 1 | |
| P12 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| P23 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| P25 | K1KA20AA0178 | 20P CONNECTOR | 1 | |
| | | | | |
| PA2 | K1KA05AA0192 | 5P CONNECTOR | 1 | |
| PA5 | K1KA11AA0194 | 11P CONNECTOR | 1 | |
| PA10 | K1KA06A00452 | 6P CONNECTOR | 1 | |
| PA20 | K1MN40A00024 | 40P CONNECTOR | 1 | |
| PA31-34 | K1KA03AA0192 | 3P CONNECTOR | 4 | |
| PA40 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| PA1101 | K5H8012A0023 | FUSE | 1 | |
| PA9800 | K5H4022A0023 | FUSE | 1 | |
| | | | | |
| PC6480 | B3PBA0000223 | IC | 1 | |
| PC6701-03 | B3PBA0000233 | IC | 3 | |
| PC6704 | B3PBA0000234 | IC | 1 | |
| PC6705 | B3PBA0000233 | IC | 1 | |
| PC6760 | B3PBA0000223 | IC | 1 | |
| PC6801 | B3PBA0000223 | IC | 1 | |
| PC6861 | B3PBA0000223 | IC | 1 | |
| PC6871 | B3PBA0000223 | IC | 1 | |
| | | | | |
| PR401 | K5Y502BA0001 | FUSE | 1 | ⚠ |
| PR505 | K5H5022A0023 | FUSE | 1 | ⚠ |
| PR509 | ERBSE0R50U | FUSE | 1 | ⚠ |
| PR601 | K5G312B00012 | FUSE | 1 | ⚠ |
| | | | | |
| Q401 | B1CHND000004 | TRANSISTOR | 1 | |
| Q402 | B1DFDD000019 | TRANSISTOR | 1 | |
| Q404 | B1BCCF000022 | TRANSISTOR | 1 | |
| Q406 | B1DEKQ000003 | TRANSISTOR | 1 | ⚠ |
| Q407 | B1HFCFA00021 | TRANSISTOR | 1 | |
| Q408,09 | B1DHCD000034 | TRANSISTOR | 2 | |
| Q412,13 | B1DEGQ000070 | TRANSISTOR | 2 | ⚠ |
| Q418 | 2SD1819A | TRANSISTOR | 1 | |
| Q420-22 | 2SD1819A | TRANSISTOR | 3 | |
| Q434 | B1CEJQ000003 | TRANSISTOR | 1 | |
| Q501,02 | 2SD1820A | TRANSISTOR | 2 | |
| Q505 | B1CEJQ000002 | TRANSISTOR | 1 | |
| Q507 | B1DAGQ000013 | TRANSISTOR | 1 | |
| Q508 | B1HBCFA00033 | TRANSISTOR | 1 | |
| Q509 | B1HDCEA00001 | TRANSISTOR | 1 | |
| Q510 | B1DHBD000005 | TRANSISTOR | 1 | |
| Q512 | B1CBGD000001 | FET | 1 | |
| Q517 | B1HBCFA00033 | TRANSISTOR | 1 | |
| Q520 | B1HBCFA00033 | TRANSISTOR | 1 | |
| Q521 | B1CBGD000001 | FET | 1 | |
| Q524 | B1CFGF000008 | TRANSISTOR | 1 | |
| Q525 | B1CBGD000001 | FET | 1 | |
| Q527 | B1CERL000005 | TRANSISTOR | 1 | |
| Q530 | 2SD1819A | TRANSISTOR | 1 | |
| Q535 | 2SD1819A | TRANSISTOR | 1 | |
| Q537 | B1DFDD000019 | TRANSISTOR | 1 | |
| Q538 | B1CBGD000001 | FET | 1 | |
| Q540 | B1DHCD000034 | TRANSISTOR | 1 | |
| Q541 | B1CBGD000001 | FET | 1 | |
| Q551 | B1CBGD000001 | FET | 1 | |
| Q553 | 2SD1819A | TRANSISTOR | 1 | |
| Q554 | B1DHCD000034 | TRANSISTOR | 1 | |
| Q555,56 | B1DFGD000045 | TRANSISTOR | 2 | |
| Q557-59 | 2SD1819A | TRANSISTOR | 3 | |
| Q561 | 2SD1819A | TRANSISTOR | 1 | |
| Q563 | B1CFGF000008 | TRANSISTOR | 1 | |
| Q564,65 | 2SB1218ARL | TRANSISTOR | 2 | |
| Q566 | 2SD1819A | TRANSISTOR | 1 | |
| Q568 | B1CHGD000006 | TRANSISTOR | 1 | |
| Q569 | B1CBGD000001 | FET | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| Q1100-03 | B1ABDF000034 | TRANSISTOR | 4 | |
| Q1106-08 | B1ABDF000034 | TRANSISTOR | 3 | |
| Q1109,10 | B1CBHD000002 | FET | 2 | |
| Q1111 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1114 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1116 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1125 | 2SA207700L | TRANSISTOR | 1 | |
| Q1130 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1134 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1137 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1139-43 | B1ABDF000034 | TRANSISTOR | 5 | |
| Q2300 | 2SA207700L | TRANSISTOR | 1 | |
| Q2301-03 | 2SD601A | TRANSISTOR | 3 | |
| Q2306,07 | 2SA207700L | TRANSISTOR | 2 | |
| Q2510,11 | 2SD601A | TRANSISTOR | 2 | |
| Q2519 | 2SB709A | TRANSISTOR | 1 | |
| Q2607 | 2SC584500L | TRANSISTOR | 1 | |
| Q2608,09 | 2SD601A | TRANSISTOR | 2 | |
| Q2611 | 2SD601A | TRANSISTOR | 1 | |
| Q2612 | 2SB709A | TRANSISTOR | 1 | |
| Q2613 | 2SC584500L | TRANSISTOR | 1 | |
| Q2615 | 2SC584500L | TRANSISTOR | 1 | |
| Q2617 | 2SC584500L | TRANSISTOR | 1 | |
| Q2618,19 | 2SD601A | TRANSISTOR | 2 | |
| Q2624 | 2SC584500L | TRANSISTOR | 1 | |
| Q2625 | 2SK3065T100 | FET | 1 | |
| Q2626 | 2SA207700L | TRANSISTOR | 1 | |
| Q4050 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q4056-59 | 2SA207700L | TRANSISTOR | 4 | |
| Q4065-69 | B1ABDF000034 | TRANSISTOR | 5 | |
| Q4070,71 | B1MBACA00008 | TRANSISTOR | 2 | |
| Q4082,83 | 2SK137400L | TRANSISTOR | 2 | PAVCA |
| Q4084 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q4919 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q4920 | 2SA207700L | TRANSISTOR | 1 | |
| Q5601 | B1DHDC000028 | TRANSISTOR | 1 | |
| Q5602 | 2SD601A | TRANSISTOR | 1 | |
| Q5603 | B1DHDC000028 | TRANSISTOR | 1 | |
| Q5604,05 | 2SD601A | TRANSISTOR | 2 | |
| Q5610 | 2SD601A | TRANSISTOR | 1 | |
| Q5613 | 2SD601A | TRANSISTOR | 1 | |
| Q5641-43 | 2SA207700L | TRANSISTOR | 3 | |
| Q5644 | 2SD601A | TRANSISTOR | 1 | |
| Q6001-03 | B1JADN000001 | TRANSISTOR | 3 | |
| Q6021-23 | B1JADN000001 | TRANSISTOR | 3 | |
| Q6041,42 | B1JADN000002 | TRANSISTOR | 2 | |
| Q6051,52 | B1JADN000002 | TRANSISTOR | 2 | |
| Q6101-04 | B1DFKM000002 | TRANSISTOR | 4 | |
| Q6105 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6106 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6111 | 2SK326800L | FET | 1 | |
| Q6112 | B1DFKM000002 | TRANSISTOR | 1 | |
| Q6114 | B1DFKM000002 | TRANSISTOR | 1 | |
| Q6141 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6142 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6146 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6147 | B1ADNF000006 | TRANSISTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| Q6171 | 2SD2185 | TRANSISTOR | 1 | |
| Q6172 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6181 | 2SD2185 | TRANSISTOR | 1 | |
| Q6182 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6221 | 2SD1263A | TRANSISTOR | 1 | |
| Q6222 | 2SC3063 | TRANSISTOR | 1 | |
| Q6251 | 2SD601A | TRANSISTOR | 1 | |
| Q6401-03 | B1JADN000001 | TRANSISTOR | 3 | |
| Q6421-23 | B1JAEP000001 | TRANSISTOR | 3 | |
| Q6441,42 | B1JADN000002 | TRANSISTOR | 2 | |
| Q6451,52 | B1JADP000002 | TRANSISTOR | 2 | |
| Q6471 | B1CHGD000006 | TRANSISTOR | 1 | |
| Q6511 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6512 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6516 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6517 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6531 | 2SD2185 | TRANSISTOR | 1 | |
| Q6532 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6551 | 2SD2185 | TRANSISTOR | 1 | |
| Q6552 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6581 | 2SD601A | TRANSISTOR | 1 | |
| Q6601 | B1DFES000003 | TRANSISTOR | 1 | |
| Q6602 | 2SD601A | TRANSISTOR | 1 | |
| Q6621,22 | B1DFKM000001 | TRANSISTOR | 2 | |
| Q6641,42 | B1DFKM000001 | TRANSISTOR | 2 | |
| Q6644,45 | B1DFKM000001 | TRANSISTOR | 2 | |
| Q6647,48 | B1DFKM000001 | TRANSISTOR | 2 | |
| Q6661 | B1DEET000002 | TRANSISTOR | 1 | |
| Q6662 | 2SD601A | TRANSISTOR | 1 | |
| Q6663 | 2SD2185 | TRANSISTOR | 1 | |
| Q6671,72 | B1DFET000001 | TRANSISTOR | 2 | |
| Q6680 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6681,82 | 2SK389500L | FET | 2 | |
| Q6691 | 2SK620 | FET | 1 | |
| Q6742,43 | 2SD601A | TRANSISTOR | 2 | |
| Q6744 | 2SK620 | FET | 1 | |
| Q6762 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6781 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6782 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6791 | 2SD601A | TRANSISTOR | 1 | |
| Q6801 | B1BAEJ000014 | TRANSISTOR | 1 | |
| Q6802 | 2SB0709A | TRANSISTOR | 1 | |
| Q6803 | 2SD814A | TRANSISTOR | 1 | |
| Q6804 | 2SD601A | TRANSISTOR | 1 | |
| Q6821 | 2SD1263A | TRANSISTOR | 1 | |
| Q6822 | 2SC3063 | TRANSISTOR | 1 | |
| Q6824 | 2SD601A | TRANSISTOR | 1 | |
| Q6841 | 2SD1263A | TRANSISTOR | 1 | |
| Q6842 | 2SC1473A | TRANSISTOR | 1 | |
| Q9010 | 2SD601A | TRANSISTOR | 1 | |
| Q9044 | 2SD601A | TRANSISTOR | 1 | |
| Q9046 | 2SD601A | TRANSISTOR | 1 | |
| Q9049 | 2SB709A | TRANSISTOR | 1 | |
| Q9050-54 | 2SD601A | TRANSISTOR | 5 | |
| Q9055-58 | B1CBHD000002 | FET | 4 | |
| Q9300-02 | 2SD601A | TRANSISTOR | 3 | |
| Q9800,01 | B1MBEDA00015 | TRANSISTOR | 2 | |
| Q9803 | B1MBEDA00015 | TRANSISTOR | 1 | |
| Q9805,06 | 2SD601A | TRANSISTOR | 2 | |
| | | | | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R401 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R402 | ERJ6GEYJ821 | M 820 OHM,J,1/10W | 1 | |
| R403 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R404 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R406 | ERX12SJ2R2V | M 2.2 OHM, J,1/2W | 1 | |
| R407 | ERJ8ENF4303 | M 43KOHM, 1/8W | 1 | |
| R410 | D1F5100E0003 | CHIP RESISTOR | 1 | ⚠ |
| R412 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R413 | D1F5100E0003 | CHIP RESISTOR | 1 | ⚠ |
| R414 | ERJ8GEYJ153 | M 15KOHM, J,1/8W | 1 | |
| R415 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R416 | ERJ6GEYJ305 | M 3MOHM,J,1/10W | 1 | |
| R417 | ERJ6ENF4303 | M 430KOHM, 1/10W | 1 | |
| R418 | ERJ6GEYJ220 | M 22 OHM,J,1/10W | 1 | |
| R419 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R420 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R421 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R422 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 1 | |
| R423 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R424 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R425 | ERJ6ENF3902 | M 39KOHM, 1/10W | 1 | |
| R426 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R427 | ERJ8ENF4303 | M 43KOHM, 1/8W | 1 | |
| R428 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R429 | ERJ6GEYJ4R7 | M 4.7 OHM,J,1/10W | 1 | |
| R430 | ERJ6ENF4303 | M 430KOHM, 1/10W | 1 | |
| R431 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R432 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R433 | ERJ6ENF1202 | M 12KOHM, 1/10W | 1 | |
| R434 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 1 | |
| R435 | ERJ8ENF4303 | M 43KOHM, 1/8W | 1 | |
| R436 | ERJ8GEYJ153 | M 15KOHM, J,1/8W | 1 | |
| R437 | ERJ6GEYJ183 | M 18KOHM,J,1/10W | 1 | |
| R438 | ERJ6GEYJ331 | M 330 OHM,J,1/10W | 1 | |
| R439 | ERG12SJ120 | M 12 OHM, J,1/2W | 1 | |
| R440 | ERJ8GEYJ474 | M 470KOHM, J,1/8W | 1 | |
| R441,42 | ERJ6EKF6803 | M 680KOHM, 1/10W | 2 | |
| R443 | EVMAASA00B23 | CONTROL 2KOHMB | 1 | |
| R444 | ERJ6GEYJ123 | M 12KOHM,J,1/10W | 1 | |
| R448,49 | D0XGR08J0001 | M 0.08OHM,J, 5W | 2 | |
| R450 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R451 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R452 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R453 | ERJ6GEYJ305 | M 3MOHM,J,1/10W | 1 | |
| R454 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R455 | ERJ6GEYJ123 | M 12KOHM,J,1/10W | 1 | |
| R456 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R458 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R459 | ERJ6EKF6803 | M 680KOHM, 1/10W | 1 | |
| R461 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R462 | ERJ6ENF4303 | M 430KOHM, 1/10W | 1 | |
| R463 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R464 | ERJ6ENF3302 | M 33KOHM, 1/10W | 1 | |
| R465 | ERJ6ENF5603 | M 560KOHM, 1/10W | 1 | |
| R467 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R471 | ERJ8GEYJ332 | M 3.3KOHM, J,1/8W | 1 | |
| R472,73 | ERJ6ENF5603 | M 560KOHM, 1/10W | 2 | |
| R475 | ERJ6EKF6803 | M 680KOHM, 1/10W | 1 | |
| R476,77 | ERJ14YJ181U | M 181 OHM, J,1/4W | 2 | |
| R478 | ERJ8GEYJ220 | M 22 OHM, J,1/8W | 1 | |
| R480 | ERJ6ENF4702 | M 47KOHM, 1/10W | 1 | |
| R482 | ERJ8GEYJ220 | M 22 OHM, J,1/8W | 1 | |
| R483 | D0BF225JA030 | M 22MOHM,J,0.05W | 1 | ⚠ |
| R487 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R488 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R490,91 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 2 | |
| R492 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R493 | ERG12SJ120 | M 12 OHM, J,1/2W | 1 | |
| R494-96 | ERJ6ENF5603 | M 560KOHM, 1/10W | 3 | |
| R497 | ERJ6ENF1202 | M 12KOHM, 1/10W | 1 | |
| R498 | ERG3SJ101 | M 100 OHM, J, 3W | 1 | |
| R499 | D0BF394JA029 | M 390KOHM,J,0.05W | 1 | ⚠ |
| R501 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R502,03 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 2 | |
| R504 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R505 | ERJ8GEYJ330 | M 33 OHM, J,1/8W | 1 | |
| R506 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R507 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R508 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R509-11 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 3 | |
| R512 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R513,14 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 2 | |
| R515,16 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R517 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R518 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R519,20 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 2 | |
| R521,22 | ERJ8GEYJ100 | M 10 OHM, J,1/8W | 2 | |
| R523 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R524 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R525 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R526,27 | ERJ8GEYJ224 | M 220KOHM, J,1/8W | 2 | |
| R528 | ERJ6GEYJ4R7 | M 4.7 OHM,J,1/10W | 1 | |
| R529 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R530 | ERJ6RBD3302 | M 33KOHM,F,1/10W | 1 | |
| R532 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R533 | ERJ6GEYJ163 | M 16KOHM,J,1/10W | 1 | |
| R534 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R535,36 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R537 | ERJ6ENF1003 | M 100KOHM, 1/10W | 1 | |
| R538 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R539 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R540,41 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 2 | |
| R542 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R543 | ERJ6GEYJ153 | M 15KOHM,J,1/10W | 1 | |
| R544 | ERJ6GEYJ331 | M 330 OHM,J,1/10W | 1 | |
| R545 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R546 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R547 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R548 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R549 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R550 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R551 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 1 | |
| R552 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R553 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R554 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R555,56 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 2 | |
| R557 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R558 | ERJ6GEYJ474 | M 470KOHM,J,1/10W | 1 | |
| R559 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R560 | ERJ6ENF9101 | M 9.1KOHM, 1/10W | 1 | |
| R561 | ERJ6ENF5101 | M 5.1KOHM, 1/10W | 1 | |
| R562 | ERJ6ENF4701 | M 4.7KOHM, 1/10W | 1 | |
| R563 | ERJ6GEYJ2R2 | M 2.2 OHM,J,1/10W | 1 | |
| R564 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R565,66 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 2 | |
| R567,68 | ERJ8ENF1004 | M 100KOHM, 1/8W | 2 | |
| R569 | ERJ6ENF3302 | M 33KOHM, 1/10W | 1 | |
| R570 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R571 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R572,73 | ERJ8ENF3900 | M 390 OHM, 1/8W | 2 | |
| R574 | ERJ6GEYJ331 | M 330 OHM,J,1/10W | 1 | |
| R575 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R576 | ERJ6ENF1202 | M 12KOHM, 1/10W | 1 | |
| R577,78 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 2 | |
| R579 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R580,81 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 2 | |
| R582 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R583 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R584 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R585 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R586 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R587 | ERJ8RSJR16V | M 16 OHM, 1/8W | 1 | |
| R588 | ERJ8ENF3900 | M 390 OHM, 1/8W | 1 | |
| R589,90 | ERJ8GEYJ123 | M 12KOHM, J,1/8W | 2 | |
| R591 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R592 | ERJ6ENF3001 | M 3KOHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R593 | ERJ6ENF5601 | M 5.6KOHM, 1/10W | 1 | |
| R594 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 1 | |
| R595 | ERJ8GEYJ222 | M 2.2KOHM, J,1/8W | 1 | |
| R596 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R597,98 | ERJ6ENF3302 | M 33KOHM, 1/10W | 2 | |
| R599,00 | ERJ8ENF3900 | M 390 OHM, 1/8W | 2 | |
| R601 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R602 | ERJ6ENF3301 | M 3.3KOHM, 1/10W | 1 | |
| R603 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R606 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R607 | ERJ6ENF2202 | M 2.2KOHM, 1/10W | 1 | |
| R608 | ERJ8GEYJ332 | M 3.3KOHM, J,1/8W | 1 | |
| R609 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R610,11 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 2 | |
| R612 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R613 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R614 | ERJ6ENF3301 | M 3.3KOHM, 1/10W | 1 | |
| R615 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R616,17 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R618 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R619 | ERJ8RQJR39 | M0.39 OHM, 1/8W | 1 | |
| R620 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R621 | ERJ8GEYJ123 | M 12KOHM, J,1/8W | 1 | |
| R622 | ERJ8ENF1503 | M 15KOHM, 1/8W | 1 | |
| R624 | ERX2SJR22 | M0.22 OHM, J, 2W | 1 | |
| R626 | ERJ8ENF1503 | M 15KOHM, 1/8W | 1 | |
| R627 | ERJ6GEYJ752 | M 7.5KOHM,J,1/10W | 1 | |
| R628 | EVMAASA00B33 | CONTROL 3KOHMB | 1 | |
| R629 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R630 | ERJ8GEYJ472 | M 4.7KOHM, J,1/8W | 1 | |
| R631 | ERJ8GEYJ333 | M 33KOHM, J,1/8W | 1 | |
| R632 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R633 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R634 | ERJ8RQJR39 | M0.39 OHM, 1/8W | 1 | |
| R636 | ERJ8ENF1503 | M 15KOHM, 1/8W | 1 | |
| R637 | ERJ8RQJR39 | M0.39 OHM, 1/8W | 1 | |
| R638 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R639,40 | ERJ8RQJR39 | M0.39 OHM, 1/8W | 2 | |
| R641 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R642-44 | ERJ8RQJR39 | M0.39 OHM, 1/8W | 3 | |
| R645 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R646,47 | ERJ8GEYJ223 | M 22KOHM, J,1/8W | 2 | |
| R648 | ERJ8ENF1503 | M 15KOHM, 1/8W | 1 | |
| R649 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R650 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R651,52 | ERJ6ENF1002 | M 10KOHM, 1/10W | 2 | |
| R653 | ERJ6ENF3302 | M 33KOHM, 1/10W | 1 | |
| R654 | ERJ8GEYJ220 | M 22 OHM, J,1/8W | 1 | |
| R655 | ERJ8RSJR16V | M 16 OHM, 1/8W | 1 | |
| R656 | ERJ6ENF4702 | M 47KOHM, 1/10W | 1 | |
| R657 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R658 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R659 | ERJ6ENF3002 | M 30KOHM, 1/10W | 1 | |
| R660 | ERJ6ENF1202 | M 12KOHM, 1/10W | 1 | |
| R661 | EVMEASA00B53 | CONTROL 5KOHMB 0.3W | 1 | |
| R662 | ERJ6ENF1503 | M 150KOHM, 1/10W | 1 | |
| R664 | ERJ6ENF9101 | M 9.1KOHM, 1/10W | 1 | |
| R665 | EVMEASA00B23 | CONTROL 2KOHMB 0.3W | 1 | |
| R666 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R667,68 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 2 | |
| R669 | ERJ6ENF1303 | M 130KOHM, 1/10W | 1 | |
| R670 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R671 | EVMEASA00B14 | CONTROL 10KOHMB 0.3W | 1 | |
| R672,73 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R674 | ERJ8GEYJ333 | M 33KOHM, J,1/8W | 1 | |
| R675 | ERJ6ENF2202 | M 2.2KOHM, 1/10W | 1 | |
| R676 | ERJ8GEYJ333 | M 33KOHM, J,1/8W | 1 | |
| R677 | ERJ6GEYJ474 | M 470KOHM,J,1/10W | 1 | |
| R678 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 1 | |
| R679,80 | ERJ8RSJR16V | M 16 OHM, 1/8W | 2 | |
| R682 | ERJ6ENF2002 | M 20KOHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R683 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R684 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R685,86 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R687 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R688,89 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R690 | ERJ6GEYJ4R7 | M 4.7 OHM,J,1/10W | 1 | |
| R691 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R692 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R693 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R695 | ERJ6ENF1202 | M 12KOHM, 1/10W | 1 | |
| R696 | ERJ8GEYJ100 | M 10 OHM, J,1/8W | 1 | |
| R697 | ERJ6GEYJ4R7 | M 4.7 OHM,J,1/10W | 1 | |
| R698 | ERJ8RSJR16V | M 16 OHM, 1/8W | 1 | |
| R699-08 | ERJ8GEYJ105 | M 1MOHM, J,1/8W | 10 | |
| R711 | ERJ8RSJR16V | M 16 OHM, 1/8W | 1 | |
| R712 | ERJ6GEYJ4R7 | M 4.7 OHM,J,1/10W | 1 | |
| R713 | ERJ8GEYJ472 | M 4.7KOHM, J,1/8W | 1 | |
| R714 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R715 | ERDS2TJ101 | C 100 OHM, J,1/4W | 1 | |
| R921 | ERJ6RBD3302 | M 33KOHM,F,1/10W | 1 | |
| R922 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R931 | ERJ6ENF3002 | M 30KOHM, 1/10W | 1 | |
| R932 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R933 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R935 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R936 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R937 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R938 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R939,40 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R943 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R945 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R946 | ERJ6GEYJ333 | M 33KOHM,J,1/10W | 1 | |
| R947 | ERJ8GEYJ331 | M 330 OHM, J,1/8W | 1 | |
| R950 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R951,52 | ERJ8GEYJ100 | M 10 OHM, J,1/8W | 2 | |
| R953 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R955 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R956 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R1101 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1102,03 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 2 | |
| R1105 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1113 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R1116 | ERJ2GEJ562 | M 5.6KOHM,J,0.063W | 1 | |
| R1117 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1121,22 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1123 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R1124,25 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 2 | |
| R1129,30 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R1131,32 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1133,34 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 2 | |
| R1135 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1137 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1145 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1147,48 | D1HG5608A002 | NETWORK RESISTER | 2 | |
| R1150 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1153 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1154,55 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R1156 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R1157 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1158 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R1159 | ERJ2GEJ123X | M 12KOHM ,J,0.063W | 1 | |
| R1161 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1164 | ERJ2GEJ123X | M 12KOHM ,J,0.063W | 1 | |
| R1165 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R1166,67 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1168 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1171 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1174 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1175 | ERJ2GEJ563 | M 56KOHM ,J,0.063W | 1 | |
| R1176 | ERJ2GEJ123X | M 12KOHM ,J,0.063W | 1 | |
| R1177 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1181 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1182 | ERJ2GEJ683 | M 68KOHM, J,0.063W | 1 | |
| R1183 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R1184 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1187 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R1188 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1189,90 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R1197-99 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 3 | |
| R1200 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R1203 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1206 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1207 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1214 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1215-17 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 3 | |
| R1218 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1220 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1221 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R1222 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R1223 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1224 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1225,26 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1228 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R1229 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1230 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R1231 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1232,33 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 2 | |
| R1234 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1235,36 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 2 | |
| R1238 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1239 | ERJ3EKF1202 | M 12KOHM, 1/16W | 1 | |
| R1241 | ERJ2GEJ822 | M 8.2KOHM, J,0.063W | 1 | |
| R1246 | ERJ2GEJ912 | M 9.1KOHM, J,0.063W | 1 | |
| R1249 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1250 | ERJ2GEJ224 | M 220KOHM, J,0.063W | 1 | |
| R1251,52 | EXB2HV101J | RESISTOR ARRAY | 2 | |
| R1256 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1259 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1263,64 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1268,69 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R1270,71 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1275 | ERJ3EKF7151 | M7.15KOHM, 1/16W | 1 | |
| R1279,80 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1281 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1282 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1283 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1290 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R1292,93 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 2 | |
| R1296,97 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R1303-06 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R1307 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1308 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R1309-12 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R1313,14 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 2 | |
| R1315 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1316 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1318,19 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 2 | |
| R1321 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R1322 | ERJ2GEJ100 | M 10 OHM, J,0.063W | 1 | |
| R1324 | ERJ2GEJ823 | M 82KOHM, J,0.063W | 1 | |
| R1326 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1328 | ERJ2GEJ683 | M 68KOHM, J,0.063W | 1 | |
| R1330 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1332 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1333 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1338 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1339 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1342 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1343 | ERJ2GEJ561 | M 60 OHM, J,0.063W | 1 | |
| R1346 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1351 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1352 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1354 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1356,57 | ERJ2GEJ100 | M 10 OHM, J,0.063W | 2 | |
| R1363 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1367 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1368 | ERJ2GEJ183 | M 18KOHM ,J,0.063W | 1 | |
| R1372 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1375 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1376 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R1377 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 1 | |
| R1384 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1386 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1387 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1388 | ERJ2GEJ563 | M 56KOHM ,J,0.063W | 1 | |
| R1390 | ERJ2GEJ563 | M 56KOHM ,J,0.063W | 1 | |
| R1400 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1405,06 | ERJ2GEJ474 | M 470KOHM, J,0.063W | 2 | |
| R1408 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1409 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1410 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1411 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1412,13 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 2 | |
| R1426-33 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 8 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R1434 | ERJ2GEJ471 | M 470 OHM, J,0.063W | 1 | |
| R1436 | ERJ2GEJ561 | M 60 OHM, J,0.063W | 1 | |
| R1438 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1440 | ERJ2GEJ241 | M 240 OHM, J,0.063W | 1 | |
| R1446 | ERJ2GEJ471 | M 470 OHM, J,0.063W | 1 | |
| R1449 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1453 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1454 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1458,59 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1464 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1466 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1467 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1470 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1472 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R1474 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 1 | |
| R1478 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1479 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1524 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1526 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1527 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1528 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1530 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R2310,11 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R2312 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2323,24 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R2325 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2329 | ERJ3EKF1003 | M 100KOHM, 1/16W | 1 | |
| R2332 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2341 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2349 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2357 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2359 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2360 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2361 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2363 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2364 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |
| R2365 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2366 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2368 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2369 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2372,73 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R2375 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2376 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2383 | ERJ3EKF3301 | M 3.3KOHM, 1/16W | 1 | |
| R2384 | ERJ3EKF1151 | M1.15KOHM, 1/16W | 1 | |
| R2387 | ERJ3EKF1151 | M1.15KOHM, 1/16W | 1 | |
| R2388 | ERJ3EKF3301 | M 3.3KOHM, 1/16W | 1 | |
| R2397,98 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R2401,02 | ERJ3GEYJ331 | M 330 OHM,J,1/16W | 2 | |
| R2403 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2404,05 | ERJ3GEYJ331 | M 330 OHM,J,1/16W | 2 | |
| R2406 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2407 | ERJ3EKF1241 | M1.24KOHM, 1/16W | 1 | |
| R2408 | ERJ3EKF1181 | M1.18KOHM, 1/16W | 1 | |
| R2409 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R2410 | ERJ3EKF7870 | M 787 OHM, 1/16W | 1 | |
| R2421 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R2422 | ERJ3EKF7870 | M 787 OHM, 1/16W | 1 | |
| R2516 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R2517 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R2520 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R2524 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R2525 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R2526 | ERJ6GEYJ562 | M 5.6KOHM,J,1/10W | 1 | |
| R2542 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R2545 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R2550 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2553 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R2557 | ERJ6ENF5490 | M 549 OHM, 1/10W | 1 | |
| R2559,60 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R2603 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R2604 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2605 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R2606 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2607 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2608 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R2609 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2610 | ERJ3GEYJ184 | M 180KOHM,J,1/16W | 1 | |
| R2611,12 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 2 | |
| R2625 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2640,41 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R2642 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2643 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2644 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R2650 | ERJ3EKF2701 | M 2.7KOHM, 1/16W | 1 | |
| R2651 | ERJ3EKF1201 | M 1.2KOHM, 1/16W | 1 | |
| R2654 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2655 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2656 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2657 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2658 | ERJ3GEYJ123 | M 12KOHM,J,1/16W | 1 | |
| R2659 | ERJ3GEYJ823 | M 82KOHM,J,1/16W | 1 | |
| R2660 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2671 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2672 | ERJ3GEYJ123 | M 12KOHM,J,1/16W | 1 | |
| R2673 | ERJ3GEYJ823 | M 82KOHM,J,1/16W | 1 | |
| R2674 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2676 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2677 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2678 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2679 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2680,81 | ERJ3GEYJ184 | M 180KOHM,J,1/16W | 2 | |
| R2682 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2684 | ERJ3GEYJ203 | M 20KOHM,J,1/16W | 1 | |
| R2685 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2686 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2687 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2690 | ERJ3GEYJ182 | M 1.8KOHM,J,1/16W | 1 | |
| R2692 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R2693 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2694 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2695 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2696 | ERJ3GEYJ105 | M 1MOHM,J,1/16W | 1 | |
| R2697 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2698 | ERJ3GEYJ182 | M 1.8KOHM,J,1/16W | 1 | |
| R2700 | ERJ3GEYJ274 | M 270KOHM,J,1/16W | 1 | |
| R2701-03 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 3 | |
| R2704 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R2708 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2718 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2719 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R2724 | ERJ14YJ821 | M 820 OHM,J,1/16W | 1 | |
| R2726,27 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2728 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2733,34 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2735 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2736 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2737 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2738 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2741 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2744 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2747,48 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 2 | |
| R2749 | ERJ3EKF2701 | M 2.7KOHM, 1/16W | 1 | |
| R2750 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2751 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2753 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2754 | ERJ3EKF1201 | M 1.2KOHM, 1/16W | 1 | |
| R2755 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2756 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2757 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2758 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2759 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2760,61 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2762,63 | ERJ3EKF1300V | M 130 OHM, 1/16W | 2 | |
| R2764 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R2767 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2769,70 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2771 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R2772 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2773 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R2775 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2776 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R2777-79 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 3 | |
| R2781 | ERJ3GEYJ821 | M 820 OHM,J,1/16W | 1 | |
| R2783 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R2785 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2786 | ERJ3EKF8202 | M 82KOHM, 1/16W | 1 | |
| R2787 | ERJ3EKF1622V | M16.2KOHM, 1/16W | 1 | PAVCA |
| R2790 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R2791 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R2792 | ERJ3GEYJ682 | M 6.8KOHM,J,1/16W | 1 | |
| R2793-95 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 3 | |
| R2797-00 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 4 | |
| R2801,02 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |
| R2803 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R2804 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2807,08 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2818 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2821-25 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 5 | |
| R2830 | ERJ3GEYJ823 | M 82KOHM,J,1/16W | 1 | |
| R2832,33 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2834 | ERJ3EKF6342 | M6.34KOHM, 1/16W | 1 | |
| R2835 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2837 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2838 | ERJ3EKF6342 | M6.34KOHM, 1/16W | 1 | |
| R2839 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2840 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R2842 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R2843 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2848-51 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 4 | |
| R2854 | ERJ3GEYJ393 | M 39KOHM,J,1/16W | 1 | |
| R2855 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 1 | |
| R2856 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2858 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2859 | ERJ3GEYJ393 | M 39KOHM,J,1/16W | 1 | |
| R2860,61 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 2 | |
| R2862 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2864 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 1 | |
| R2865 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2868,69 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R2894 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R3751 | ERJ6ENF1741 | M1.74KOHM, 1/10W | 1 | |
| R3753 | ERJ6ENF2321 | M2.32KOHM, 1/10W | 1 | |
| R3755 | ERJ6ENF1621 | M1.62KOHM, 1/10W | 1 | |
| R3756 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R3758 | ERJ6ENF3161 | M3.16KOHM, 1/10W | 1 | |
| R4001 | ERJ3EKF1211 | M1.21KOHM, 1/16W | 1 | |
| R4004 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4008 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4010 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4017 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R4021 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4024,25 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4026,27 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 2 | |
| R4031-33 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R4037-39 | D1HG1038A002 | NETWORK RESISTER | 3 | |
| R4040,41 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4042,43 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4044 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4045,46 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R4047 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4101 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4257 | ERJ3EKF3302 | M 33KOHM, 1/16W | 1 | |
| R4265 | ERJ3EKF3242 | M32.4KOHM, 1/16W | 1 | |
| R4269 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4271,72 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4286,87 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4293 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4338-43 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 6 | |
| R4465 | ERJ2GEJ224 | M 220KOHM, J,0.063W | 1 | |
| R4469 | ERJ3EKF1500 | M 150 OHM, 1/16W | 1 | |
| R4474 | ERJ3EKF1211 | M1.21KOHM, 1/16W | 1 | |
| R4480 | ERJ3EKF4220 | M 422 OHM, 1/10W | 1 | |
| R4481 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R4482,83 | ERJ3EKF1781 | M1.78KOHM, 1/16W | 2 | |
| R4487 | ERJ3EKF5600 | M 560 OHM, 1/16W | 1 | |
| R4488 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R4495 | ERJ3EKF4302 | M 43KOHM, 1/16W | 1 | |
| R4496-99 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 4 | |
| R4500 | ERJ3EKF2702V | M27.0KOHM, 1/16W | 1 | |
| R4501,02 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R4503 | ERJ3EKF1600 | M 160 OHM, 1/16W | 1 | |
| R4507-13 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 7 | |
| R4517 | ERJ3EKF1371 | M 13.7 OHM, 1/16W | 1 | |
| R4520 | ERJ3EKF1691 | M1.69KOHM, 1/16W | 1 | |
| R4521,22 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4527 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4533 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4540 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4542 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4544 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4550 | EXB28V220J | RESISTOR ARRAY | 1 | |
| R4552 | EXB28V220J | RESISTOR ARRAY | 1 | |
| R4554 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4555 | EXB28V220J | RESISTOR ARRAY | 1 | |
| R4560,61 | EXB28V220J | RESISTOR ARRAY | 2 | |
| R4563-65 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 3 | |
| R4568 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4583,84 | ERJ2GEJ390 | M 39 OHM, J,0.063W | 2 | |
| R4589-04 | ERJ2GEJ2R2X | M 2.2OHM, J,0.063W | 16 | |
| R4605,06 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4607 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4609,10 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4612,13 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4617,18 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4619 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R4620 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4621 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R4622 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4624 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4626 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4628 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4629-32 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 4 | |
| R4633,34 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4636 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4637 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R4639 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4640 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4641 | EXB28V330J | RESISTOR ARRAY | 1 | |
| R4642-45 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R4647 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4648 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R4655 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R4657 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R4658 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4661 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4662 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4665 | EXB2HV220JV | RESISTOR ARRAY | 1 | |
| R4667 | EXB2HV220JV | RESISTOR ARRAY | 1 | |
| R4668 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R4669 | EXB2HV220JV | RESISTOR ARRAY | 1 | |
| R4672,73 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4675 | ERJ3EKF1802 | M 18KOHM, 1/16W | 1 | |
| R4677 | ERJ3EKF1802 | M 18KOHM, 1/16W | 1 | |
| R4679,80 | ERJ3EKF2202 | M 22KOHM, 1/16W | 2 | |
| R4681,82 | ERJ3EKF3302 | M 33KOHM, 1/16W | 2 | |
| R4701 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R4704,05 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 2 | |
| R4706 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4708,09 | ERJ2GEJ151 | M 150 OHM, J,0.063W | 2 | |
| R4710 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4711 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4712 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4713,14 | EXB2HV221JV | RESISTOR ARRAY | 2 | |
| R4715 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R4718-20 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R4727 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4729,30 | ERJ3EKF1000 | M 100 OHM, 1/16W | 2 | |
| R4731 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R4732 | ERJ3EKF4751 | M 4.75KOHM, 1/16W | 1 | |
| R4733 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R4734 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R4735 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R4737 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4738,39 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4743-47 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 5 | |
| R4749,50 | EXB2HV680J | RESISTOR ARRAY | 2 | |
| R4751-54 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R4756-60 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 5 | |
| R4762 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R4763-65 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |
| R4772 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4773 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4774 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4775 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4776 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4777 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4778 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4779 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4782 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4783 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4784 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4785 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4788 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4791,92 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 2 | |
| R4793,94 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4796 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4804 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4805,06 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |
| R4807-11 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 5 | |
| R4814 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4816,17 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 2 | |
| R4819 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R4822 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4823-25 | EXB38VR000 | RESISTOR ARRAY | 3 | |
| R4826,27 | EXB2HVR000 | RESISTOR ARRAY | 2 | |
| R4830,31 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4832 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 1 | |
| R4833 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4835 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4837 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4838 | ERJ2GEJ112 | M 1.1KOHM, J,0.063W | 1 | |
| R4841 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4846,47 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 2 | |
| R4898 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4900,01 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R4903 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4904 | ERJ2GEJ682 | M 6.8KOHM, J,0.063W | 1 | |
| R4905 | ERJ2GEJ152 | M 1.5KOHM, J,0.063W | 1 | |
| R5601 | ERJ3EKF1800 | M 180 OHM, 1/16W | 1 | |
| R5603 | ERJ3EKF1542 | M15.4KOHM, 1/16W | 1 | |
| R5605 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5606 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5607 | ERJ3EKF4531 | M4.53KOHM, 1/16W | 1 | |
| R5609 | ERJ3EKF2000 | M 200 OHM, 1/16W | 1 | |
| R5615 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5617 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5619 | ERJ3GEYJ333 | M 33KOHM,J,1/16W | 1 | |
| R5620 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5621 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5625-27 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 3 | |
| R5632 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R5633 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5634 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R5635 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R5637,38 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R5639 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5640 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5641 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5642 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R5643 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5644 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5645 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R5646 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R5647 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R5648 | ERJ3GEYJ392 | M 3.9KOHM,J,1/16W | 1 | |
| R5649 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R5650 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R5652 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R5653,54 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R5659 | ERJ3EKF4700 | M 470 OHM, 1/16W | 1 | |
| R5660 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R5662 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5664 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5665 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |
| R5667-69 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 3 | |
| R5672 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5676 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5692 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5693 | ERJ3GEYJ333 | M 33KOHM,J,1/16W | 1 | |
| R5694 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |
| R5695 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5801 | ERJ3EKF8450 | M 845 OHM, 1/16W | 1 | |
| R5802 | ERJ3EKF1302 | M 23KOHM, 1/16W | 1 | |
| R5803 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R5804 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R5805-08 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 4 | |
| R5809 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5822-24 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 3 | |
| R5826 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R5836 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R6001-06 | ERJ14YJ150U | M 15 OHM, J,1/4W | 6 | |
| R6020 | ERG3FJS101D | M 100 OHM, J, 3W | 1 | |
| R6021 | ERJ14YJ150U | M 15 OHM, J,1/4W | 1 | |
| R6022 | ERG3FJS101D | M 100 OHM, J, 3W | 1 | |
| R6023-27 | ERJ14YJ150U | M 15 OHM, J,1/4W | 5 | |
| R6031,32 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6033 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6034 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6041-44 | ERJ14YJ100 | M 10 OHM, J,1/4W | 4 | |
| R6051-54 | ERJ14YJ100 | M 10 OHM, J,1/4W | 4 | |
| R6061,62 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 2 | |
| R6101-08 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 8 | |
| R6109 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6110 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6111,12 | D0GD470JA036 | M 47 OHM,J,0.25W | 2 | |
| R6113 | ERJ14YJ224 | M 220KOHM, J,1/4W | 1 | |
| R6114 | D0GD470JA036 | M 47 OHM,J,0.25W | 1 | |
| R6116 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6131,32 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6133,34 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6135,36 | D0GD100JA036 | M 10 OHM,J,0.25W | 2 | |
| R6141,42 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6146,47 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6151,52 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6153,54 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6155,56 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R6157-60 | D0GF1R0JA047 | M 1.0 OHM,J, 0.33W | 4 | |
| R6171 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6172,73 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6181 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6182,83 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6191-94 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 4 | |
| R6195 | D0GD104JA036 | M 100KOHM,J,0.25W | 1 | |
| R6196 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6213 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6214 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6222 | ERG1FJS103D | M 10KOHM, J, 1W | 1 | |
| R6223 | ERG2FJS123D | M 12KOHM, J, 2W | 1 | |
| R6225 | D0GD203JA036 | M 20KOHM,J,0.25W | 1 | |
| R6226,27 | ERJ6GEYJ163 | M 16KOHM,J,1/10W | 2 | |
| R6228 | ERJ6GEYJ562 | M 5.6KOHM,J,1/10W | 1 | |
| R6229 | ERJ6GEYJ163 | M 16KOHM,J,1/10W | 1 | |
| R6231 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R6232 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6241 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R6242 | EXB38V472J | RESISTOR ARRAY | 1 | |
| R6243 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R6244 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6245 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R6246 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6251 | D0GD103JA036 | M 10KOHM,J,0.25W | 1 | |
| R6252,53 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6254 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R6255 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6256 | ERJ6ENF1501 | M 1.5KOHM, 1/10W | 1 | |
| R6257 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6258 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6261 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6401-06 | ERJ14YJ150U | M 15 OHM, J,1/4W | 6 | |
| R6421-26 | ERJ14YJ150U | M 15 OHM, J,1/4W | 6 | |
| R6441-44 | ERJ14YJ100 | M 10 OHM, J,1/4W | 4 | |
| R6451-54 | ERJ14YJ100 | M 10 OHM, J,1/4W | 4 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6465 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6466 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6467,68 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6471 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6472 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6473 | ERJ6GEYJ561 | M 560 OHM,J,1/10W | 1 | |
| R6474 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6475,76 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 2 | |
| R6477 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6478 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6479 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6501,02 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6503 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6504,05 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6506 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6507-09 | D0GF1R0JA047 | M 1.0 OHM,J, 0.33W | 3 | |
| R6511,12 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6516,17 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6521,22 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6523,24 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6525,26 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R6531 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6532,33 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6551 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6552,53 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6561-64 | EXB38V470J | RESISTOR ARRAY | 4 | |
| R6565-68 | EXB38V472J | RESISTOR ARRAY | 4 | |
| R6581 | D0GD103JA036 | M 10KOHM,J,0.25W | 1 | |
| R6582,83 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6584 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R6585 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6586 | ERJ6ENF1801 | M 1.8KOHM, 1/10W | 1 | |
| R6587 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6588 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6590 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6591 | EXB38V472J | RESISTOR ARRAY | 1 | |
| R6592 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6603 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6604 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6605 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6606 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R6607 | ERJ6ENF5601 | M 5.6KOHM, 1/10W | 1 | |
| R6608,09 | D0GF102JA047 | M 1.0 KOHM,J,0.33W | 2 | |
| R6610 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6611 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R6612 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R6613 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R6614,15 | D0GF243JA047 | M 24 KOHM,J,0.33W | 2 | |
| R6616 | ERJ6ENF1502 | M 15KOHM, 1/10W | 1 | |
| R6617 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R6618 | ERJ6ENF1202 | M 12KOHM, 1/10W | 1 | |
| R6619 | ERJ6ENF1501 | M 1.5KOHM, 1/10W | 1 | |
| R6620 | D0D28R2JA021 | M 8.2 OHM,J,5W | 1 | |
| R6621,22 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 2 | |
| R6641,42 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 2 | |
| R6644,45 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6647,48 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 2 | |
| R6658 | D0D1101JA009 | M 100 OHM,J,1W | 1 | |
| R6659,60 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 2 | |
| R6661 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6662 | ERJ6ENF3001 | M 3KOHM, 1/10W | 1 | |
| R6663 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6664 | D0GF222JA047 | M 2.2 KOHM,J,0.33W | 1 | |
| R6665 | ERJ14YJ470 | M 47 OHM,J, 1/2W | 1 | |
| R6666 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6667,68 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 2 | |
| R6671 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R6672 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6673,74 | D0GD5R6JA059 | M 5.6 OHM,J,0.25W | 2 | |
| R6682 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6683 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6684 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 1 | |
| R6685 | ERJ6GEYJ471 | M 470 OHM,J,1/10W | 1 | |
| R6686 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6687 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6688 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6689 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 1 | |
| R6690 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 1 | |
| R6691 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6696,97 | D0D32R2JA020 | M 2.2 OHM,J,5W | 2 | |
| R6700-08 | ERJ6GEYJ471 | M 470 OHM,J,1/10W | 9 | |
| R6710-18 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 9 | |
| R6721,22 | EXB38V220J | RESISTOR ARRAY | 2 | |
| R6723 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6724 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6742 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6743 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6744 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6745 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6746,47 | D0GD103JA036 | M 10KOHM,J,0.25W | 2 | |
| R6755 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6756-58 | D0GD101JA059 | M 100 OHM,J,0.25W | 3 | |
| R6759 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6760 | ERJ6GEYJ122 | M 1.2KOHM,J,1/10W | 1 | |
| R6761 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 1 | |
| R6762 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6775,76 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6777 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6781 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R6782 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6791 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6792 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6793 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6801,02 | ERX1FJSR22D | M0.22 OHM, J, 1W | 2 | |
| R6806 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6807 | ERJ6GEYJ332 | M 3.3KOHM,J,1/10W | 1 | |
| R6808 | ERG3FJS560D | M 56 OHM, J, 3W | 1 | |
| R6809 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6810,11 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 2 | |
| R6812 | ERJ6ENF2403 | M 240KOHM, 1/10W | 1 | |
| R6813 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R6814 | ERJ6ENF5601 | M 5.6KOHM, 1/10W | 1 | |
| R6815 | ERG2FJS183D | M 18KOHM, J, 2W | 1 | |
| R6816 | ERJ6ENF1582 | M15.8KOHM, 1/10W | 1 | |
| R6817 | ERJ6ENF2701 | M 2.7KOHM, 1/10W | 1 | |
| R6821 | ERG2FJS221D | M 220 OHM, J, 2W | 1 | |
| R6822 | ERJ12YJ104U | M 100KOHM, 1/2W | 1 | |
| R6823 | ERG1FJS104D | M 100KOHM, J, 1W | 1 | |
| R6824 | ERJ6GEYJ562 | M 5.6KOHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6825,26 | ERJ6ENF2703 | M 270KOHM, 1/10W | 2 | |
| R6827 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R6828 | ERJ6ENF5231 | M5.23KOHM, 1/10W | 1 | |
| R6829,30 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 2 | |
| R6831 | ERJ6GEYJ153 | M 15KOHM,J,1/10W | 1 | |
| R6833-35 | ERJ6ENF5602 | M 56KOHM, 1/10W | 3 | |
| R6836 | ERJ6ENF6802 | M 68KOHM, 1/10W | 1 | |
| R6837 | ERJ6ENF4702 | M 47KOHM, 1/10W | 1 | |
| R6839 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6841 | ERJ12YJ153U | M 15KOHM, 1/2W | 1 | |
| R6842 | ERJ14YJ433U | M 43KOHM, 1/2W | 1 | |
| R6843 | ERJ6GEYJ623 | M 62KOHM,J,1/10W | 1 | |
| R6844 | ERG2FJS101D | M 100 OHM, J, 2W | 1 | |
| R6845 | ERJ6GEYJ623 | M 62KOHM,J,1/10W | 1 | |
| R6846,47 | ERJ6GEYJ563 | M 56KOHM,J,1/10W | 2 | |
| R6848 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6849,50 | ERJ6ENF6802 | M 68KOHM, 1/10W | 2 | |
| R6851 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6852 | ERJ6ENF2491 | M2.49KOHM, 1/10W | 1 | |
| R6853 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6860 | D0D28R2JA021 | M 8.2 OHM,J,5W | 1 | |
| R6861 | ERJ6ENF3902 | M 39KOHM, 1/10W | 1 | |
| R6862,63 | ERJ6ENF4702 | M 47KOHM, 1/10W | 2 | |
| R6864 | ERJ6ENF9101 | M 9.1KOHM, 1/10W | 1 | |
| R6865,66 | ERJ6ENF2201 | M 2.2KOHM, 1/10W | 2 | |
| R6867 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6868 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R6869 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6871-73 | ERJ6ENF3902 | M 39KOHM, 1/10W | 3 | |
| R6874 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R6875 | ERJ6ENF3301 | M 3.3KOHM, 1/10W | 1 | |
| R6876 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6877 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6878 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R6879 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6886-88 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 3 | |
| R6901 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6902-04 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 3 | |
| R6905 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6909 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6913 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6917 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6924 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6931-34 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 4 | |
| R6935,36 | ERJ8GEYJ224 | M 220KOHM, J,1/8W | 2 | |
| R6951 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6952-54 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 3 | |
| R6955 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6959 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6963 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6967 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6971 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6981-84 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 4 | |
| R6985,86 | ERJ8GEYJ224 | M 220KOHM, J,1/8W | 2 | |
| R7112 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R7113,14 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R7115 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R7116 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R7118,19 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R7120 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7122-25 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7126 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 1 | |
| R7127,28 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7132-37 | EXB38V470J | RESISTOR ARRAY | 6 | |
| R7139,40 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7142-45 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7146 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7149 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7151-54 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7155 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7156 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7158,59 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7162-67 | EXB38V102J | RESISTOR ARRAY | 6 | |
| R7169 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7171-74 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7175 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7177 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7179,80 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R7186,87 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7201-07 | EXB38V470J | RESISTOR ARRAY | 7 | |
| R7208-10 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R7212-15 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7216 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R7217 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7219 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 1 | |
| R7221 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7223-26 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7227 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7229 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R7231 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7232-35 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7236 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7237-42 | EXB38V102J | RESISTOR ARRAY | 6 | |
| R7245 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7246-49 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R7250,51 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7256,57 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R7258 | EXB38V102J | RESISTOR ARRAY | 1 | |
| R7260 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7262-65 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7266 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7269 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R7270 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R7271 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9060-67 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 8 | |
| R9070 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9074 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9076 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9096 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9098 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9099 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9100,01 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9102 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R9105 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9106 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9107 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R9108,09 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9110 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9111 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R9113 | ERJ3GEYJ100 | M 10 OHM,J,1/16W | 1 | |
| R9120 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9121 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9127 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R9129 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R9131-33 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 3 | |
| R9134 | ERJ3GEYJ333 | M 33KOHM,J,1/16W | 1 | |
| R9140 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R9141-45 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 5 | |
| R9148 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9149 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9150,51 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9152,53 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9154,55 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 2 | |
| R9156-59 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 4 | |
| R9160,61 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R9164-66 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9167,68 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |
| R9169 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9170-72 | ERJ3GEYJ393 | M 39KOHM,J,1/16W | 3 | |
| R9173-75 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9177 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R9178 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9179 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R9180 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9181-84 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 4 | |
| R9185,86 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9187,88 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 2 | |
| R9189,90 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9192 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9193 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9194 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9196 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9199 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9203 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R9205 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9206,07 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 2 | |
| R9215 | ERJ3GEYJ123 | M 12KOHM,J,1/16W | 1 | |
| R9217-22 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 6 | |
| R9223 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9225 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9230 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9232 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9236 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9237 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9240 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9317 | ERJ3GEYJ391 | M 390 OHM,J,1/16W | 1 | |
| R9348 | D1HG8208A002 | NETWORK RESISTER | 1 | |
| R9349 | EXB38V820J | RESISTOR ARRAY | 1 | |
| R9350,51 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9352 | EXB38V820J | RESISTOR ARRAY | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R9353,54 | D1HG8208A002 | NETWORK RESISTER | 2 | |
| R9355,56 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9357-59 | D1HG8208A002 | NETWORK RESISTER | 3 | |
| R9360 | EXB38V820J | RESISTOR ARRAY | 1 | |
| R9361,62 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9363 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9366 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9367 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9368 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9369 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9370 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9371 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9379 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9380 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 1 | |
| R9382 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9390 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9391 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9394 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9395 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9501 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9503 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9506 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9507 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9511-13 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R9514 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9516 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9518 | ERJ3GEYJ561 | M 560 OHM,J,1/16W | 1 | |
| R9523 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9525 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9526 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9527,28 | EXB2HV272JV | RESISTOR ARRAY | 2 | |
| R9529,30 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9531-33 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R9534 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9535,36 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9537 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9539 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9543,44 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9545 | ERJ3GEYJ304V | M 300KOHM,J,1/16W | 1 | |
| R9548-50 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9552 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9555 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9800 | ERJ3EKF1302 | M 23KOHM, 1/16W | 1 | |
| R9801 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R9802 | ERJ3EKF6202 | M 62KOHM, 1/16W | 1 | |
| R9803 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9804 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R9805 | ERJ3EKF3002 | M 30KOHM, 1/16W | 1 | |
| R9806 | ERJ3EKF3902 | M 39KOHM, 1/16W | 1 | |
| R9807 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9808 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9810 | ERJ3EKF3001 | M 3KOHM, 1/16W | 1 | |
| R9813 | ERJ3EKF2401 | M 2.4KOHM, 1/16W | 1 | |
| R9814 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R9815 | ERJ3EKF2202 | M 22KOHM, 1/16W | 1 | |
| R9816 | ERJ3EKF8202 | M 82KOHM, 1/16W | 1 | |
| R9821 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9823-27 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 5 | |
| R9828 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9830,31 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9838,39 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |
| R9840 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9841 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9842-44 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 3 | |
| R9845 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R9846,47 | EXB2HV272JV | RESISTOR ARRAY | 2 | |
| R9848,49 | EXB2HV470JV | RESISTOR ARRAY | 2 | |
| R9850 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |
| R9854 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9859 | EXB38V101J | RESISTOR ARRAY | 1 | |
| R9861-63 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9868 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9869-71 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9872 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9878 | ERJ3EKF3902 | M 39KOHM, 1/16W | 1 | |
| R9879 | ERJ3EKF2002 | M 20KOHM, 1/16W | 1 | |
| R9880 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R9883 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9884 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9891 | ERJ3EKF4702 | M 47KOHM, 1/16W | 1 | |
| R9892 | ERJ3EKF1502 | M 15KOHM, 1/16W | 1 | |
| R9893 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R9896 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9897 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9903 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9904 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9905 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9906 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9907 | ERJ3GEYJ151 | M 150 OHM,J,1/16W | 1 | |
| R9917,18 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R9919,20 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9922 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9929 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9936-39 | ERJ3EKF1001 | M 1KOHM, 1/16W | 4 | |
| R9940 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9941,42 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9943-51 | EXB38V470J | RESISTOR ARRAY | 9 | |
| R9952-55 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 4 | |
| R9956 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| | | | | |
| RL402,03 | TSEH8011 | RELAY | 2 | ⚠ |
| | | | | |
| RM2510 | PNA4701M05TV | REMOTE CONTROL RECEIVER | 1 | |
| | | | | |
| RTL | TNAG170S | DT-PACK | 1 | PAVCA ⚠ |
| RTL | TNPA3769ABE | CIRCUIT BOARD H | 1 | PAVCA ⚠ |
| RTL | TNPA3855E | CIRCUIT BOARD HC | 1 | PAVCA ⚠ |
| RTL | TNPA3903BGS | CIRCUIT BOARD DG | 1 | PAVCA ⚠ |
| RTL | TXNPA1BJTUE | CIRCUIT BOARD PA | 1 | PAVCA ⚠ |
| RTL | TXNC11BJTUE | CIRCUIT BOARD C1 | 1 | PAVCA ⚠ |
| RTL | TXNC21BJTUE | CIRCUIT BOARD C2 | 1 | PAVCA ⚠ |
| RTL | TNPA3810AHS | CIRCUIT BOARD D | 1 | PAVCA ⚠ |
| RTL | TXN/P1BJTU | CIRCUIT BOARD P | 1 | PAVCA ⚠ |
| RTL | TXNSC1BJTUE | CIRCUIT BOARD SC | 1 | PAVCA ⚠ |
| RTL | TXNSD1BJTUE | CIRCUIT BOARD SD | 1 | PAVCA ⚠ |
| RTL | TXNSS1BJTUE | CIRCUIT BOARD SS | 1 | PAVCA ⚠ |
| RTL | TXNSU1BJTUE | CIRCUIT BOARD SU | 1 | PAVCA ⚠ |
| RTL | TNPA3603AES | CIRCUIT BOARD K | 1 | PAVCA ⚠ |
| RTL | TNPA3604ACS | CIRCUIT BOARD S | 1 | PAVCA ⚠ |
| | | | | |
| S2 | K1KA02AA0193 | 2P CONNECTOR | 1 | |
| S401,02 | J0LT00000009 | SWITCH | 2 | ⚠ |
| | | | | |
| SC2 | K1KA02A00626 | 2P CONNECTOR | 1 | |
| SC20 | K1KA20AA0008 | 20P CONNECTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| SC23 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| SC30 | K1KA08AA0192 | 8P CONNECTOR | 1 | |
| SC41,42 | K1ML80B00001 | 80P CONNECTOR | 2 | |
| SC45,46 | K1KA09A00239 | 9P CONNECTOR | 2 | |
| | | | | |
| SD1-D4 | K1MN96B00005 | 96P CONNECTOR | 4 | |
| SD46 | K1KB09A00045 | 9P CONNECTOR | 1 | |
| | | | | |
| SS11 | K1KA02A00626 | 2P CONNECTOR | 1 | |
| SS12 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| SS23 | K1KA12AA0194 | 12P CONNECTOR | 1 | |
| SS34 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| SS41-44 | K1MN13B00020 | 13P CONNECTOR | 4 | |
| | | | | |
| SU1-U4 | K1MN96B00005 | 96P CONNECTOR | 4 | |
| SU45 | K1KB09A00045 | 9P CONNECTOR | 1 | |
| | | | | |
| SW2500 | K0F122A00172 | SWITCREMOTE CONTROLH | 1 | |
| SW3751-55 | EVQ11G05R | SWITCH | 5 | |
| | | | | |
| T401 | G4D4A0000117 | SWITCHING TRANSFORMER | 1 | |
| T402 | G4D1A0000098 | SWITCHING TRANSFORMER | 1 | ⚠ |
| T404 | ETS42LA12GAD | SWITCHING TRANS | 1 | ⚠ |
| T407 | ETQ11K5AZ | CHOKE TRANS | 1 | ⚠ |
| T410 | ETS25AF115AH | SWITCHING TRANS | 1 | ⚠ |
| T601 | G4D2A0000264 | SWITCHING TRANS | 1 | |
| T6602 | ETS25AZ139AD | SWITCHING TRANS | 1 | |
| | | | | |
| VR6000 | EVMEASA00B14 | CONTROL 10KOHMB 0.3W | 1 | |
| VR6600 | EVMEASA00B13 | CONTROL 1KOHMB 0.3W | 1 | |
| VR6602 | EVMEASA00B53 | CONTROL 5KOHMB 0.3W | 1 | |
| | | | | |
| X501 | H2B400400021 | CRYSTAL | 1 | |
| X1100 | H0J100500030 | CRYSTAL | 1 | |
| X1101 | H0J327200114 | CRYSTAL | 1 | |
| X4004 | H0J270500087 | CRYSTAL | 1 | |
| X9000 | H2D200500011 | CRYSTAL | 1 | |
| X9200 | H0J200500038 | CRYSTAL | 1 | |
| | | | | |
| Z1,Z2 | K4ZZ01000206 | TERMINAL | 2 | |
| | | | | |
| ZA2300,01 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 2 | |
| ZA4001 | K4CD08000002 | TERMINAL | 1 | |
| ZA4003-05 | K4CD08000002 | TERMINAL | 3 | |
| ZA4007-09 | TESA169 | SHIELD CLIP | 3 | |
| ZA4011-14 | TESA169 | SHIELD CLIP | 4 | |
| ZA5600,01 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 2 | |
| ZA6001,02 | K4CD01000011 | TERMINAL | 2 | |
| ZA6005 | K4CD01000011 | TERMINAL | 1 | |
| ZA6401-03 | K4CD01000011 | TERMINAL | 3 | |
| ZA7101-04 | K4CD01000013 | TERMINAL | 4 | |
| ZA7201-04 | K4CD01000013 | TERMINAL | 4 | |
| ZA9001 | K4CD01000011 | TERMINAL | 1 | |
| | | | | |
| ZN401 | ERZVGED621T2 | VARISTOR | 1 | |
| ZN402 | D4EAD7510001 | VARISTOR | 1 | |
| ZN404 | ERZVGAD681T2 | VARISTOR | 1 | |
| ZN405,06 | ERZVA7D511 | VARISTOR | 2 | |
| | | | | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C8099,00 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8101,02 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8103,04 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8105 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C8106,07 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8108 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8109 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C8110,11 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8112 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8113-18 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C8120,21 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8128,29 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8144 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8145 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8162 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8164 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8170 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C8200 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8201 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C8202,03 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8204 | EEEHB0J221P | C 220PF, J, 6.3V | 1 | |
| C8205 | EEEHB1H220P | C 22PF, J, 50V | 1 | |
| C8206,07 | EEEHB0J221P | C 220PF, J, 6.3V | 2 | |
| C8208 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| C8211 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| C8212 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8218,19 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8220 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8222 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8224,25 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8226 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C8228,29 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8231 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8233 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8234,35 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8237 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8238,39 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8240 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8241 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8244 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C8245 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8246 | EEEHB0G470R | C 47PF, J, 4V | 1 | |
| C8247 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8253 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8254 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8255 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8272,73 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8298,99 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8302 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8303 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C8304,05 | ECJ0EC1H150J | C 15PF, K, 50V | 2 | |
| C8306 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8308-10 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8311,12 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C8313-15 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8316 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C8317-19 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8320 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8321-23 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8327 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C8329-31 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8332 | ECJ0EC1H151J | C 180PF, K, 50V | 1 | |
| C8333,34 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8336 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8337 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C8338 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8342-44 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8345,46 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C8347-53 | ECJ0EB1A104K | C 0.1UF, K, 10V | 7 | |
| C8355 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8356 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8357,58 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8359 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| C8360 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8361 | ECJ0EC1H270J | C 270PF, K, 50V | 1 | |
| C8362 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8365 | ECJ1VB1A224K | C 0.22UF, Z, 50V | 1 | |
| C8368-76 | ECJ0EB1A104K | C 0.1UF, K, 10V | 9 | |
| C8377 | ECJ0EB1C223K | C 0.022UF, K, 16V | 1 | |
| C8413,14 | ECJ0EC1H120J | C 120PF, K, 50V | 2 | |
| C8415 | ECJ0EB1H471K | C 470PF, K, 50V | 1 | |
| C8419 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C8420,21 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C8430 | ECJ0EC1H050C | C 5PF, D, 50V | 1 | |
| C8432 | ECJ0EC1H270J | C 270PF, K, 50V | 1 | |
| C8433,34 | ECJ0EC1H101J | C 100PF, K, 50V | 2 | |
| C8435,36 | ECJ0EC1H470J | C 470PF, K, 50V | 2 | |
| C8437 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8440,41 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8445 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8446 | ECJ0EB1H182K | C 1800UF, Z, 50V | 1 | |
| C8450-52 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 3 | |
| C8453 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8456,57 | F1J0J475A035 | C 4.7UF, K, 16V | 2 | |
| C8467,68 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8469 | ECJ1VB0J334K | C 0.33UF, K,6.3V | 1 | |
| C8474 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8475,76 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8477 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8478 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8479,80 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8482 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8483 | ECJ0EC1H101J | C 100PF, K, 50V | 1 | |
| C8484 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8485 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C8486 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C8487 | ECJ0EC1H151J | C 180PF, K, 50V | 1 | |
| C8488 | ECJ0EC1H101J | C 100PF, K, 50V | 1 | |
| C8492 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C8495 | ECJ0EC1H020C | C 2PF, D, 50V | 1 | PAVCA |
| C8496 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C8500 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 1 | |
| C8501 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8503,04 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8505 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8506 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C8507,08 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 2 | |
| C8509 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C8510 | ECJ0EC1H050C | C 5PF, D, 50V | 1 | |
| C8511 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8515 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8516 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C8517 | ECJ0EC1H050C | C 5PF, D, 50V | 1 | |
| C8518 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8520,21 | ECJ0EC1H181J | C 180PF, K, 50V | 2 | |
| C8522,23 | ECJ0EC1H390J | C 390PF, K, 50V | 2 | |
| C8529 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8530 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8531 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C8532 | ECJ0EB1C223K | C 0.022UF, K, 16V | 1 | |
| C8533,34 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C8535 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8536 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C8537 | ECJ0EB1H471K | C 470PF, K, 50V | 1 | |
| C8538 | ECJ1VF1H104Z | C 0.1UF, Z, 50V | 1 | |
| C8542 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8546,47 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8550 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8551 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8552 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C8553-55 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8556 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C8557 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C8558 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8559,60 | EEEHB1C470P | C 47PF, J, 16V | 2 | |
| C8561 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8563 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8567 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8568 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C8572 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8573 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C8577 | ECJ0EC1H270J | C 270PF, K, 50V | 1 | |
| C8578 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8579 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8580,81 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8584 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8590 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8592 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8594 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8595,96 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8597 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8598 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8600 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8601 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8602-04 | ECJ0EB1C103K | C0.010UF, K, 16V | 3 | |
| C8605 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8606 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8607 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8608 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8609 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8610 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8611,12 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8613 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8614 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C8615,16 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8617 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8620 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8621 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8622 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8624 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8626-28 | ECJ0EB1C103K | C0.010UF, K, 16V | 3 | |
| C8629,30 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8633,34 | ECJ0EC1H151J | C 180PF, K, 50V | 2 | |
| C8635,36 | ECJ0EC1H100D | C 10PF, K, 50V | 2 | |
| C8639 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8644,45 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8646 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8652 | ECJ2FF1A106Z | C 0.001UF, Z, 10V | 1 | |
| C8653,54 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8660,61 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8662-64 | ECJ0EB1H102K | C 1000PF, K, 50V | 3 | |
| | | | | |
| D8203,04 | LNJ208R8ARA | LED | 2 | |
| D8208 | K7JAAAB00001 | DIODE | 1 | |
| D8224 | B0JCME000037 | DIODE | 1 | |
| D8225 | B0JCDD000002 | DIODE | 1 | |
| D8226 | B0JCME000037 | DIODE | 1 | |
| D8227 | B0JCDD000002 | DIODE | 1 | |
| | | | | |
| DT07 | K1KA04BA0050 | 4P CONNECTOR | 1 | |
| DT09 | K1NA09D00004 | 9P CONNECTOR | 1 | |
| DT12 | K1KAB0A00011 | CONNECTOR | 1 | |
| | | | | |
| FL8215 | J0HAAC000045 | LC FILTER | 1 | |
| FL8224-34 | J0HAAC000045 | LC FILTER | 11 | |
| FL8236,37 | J0HAAC000045 | LC FILTER | 2 | |
| FL8262,63 | J0MAB0000164 | LC FILTER | 2 | |
| FL8264,65 | J0HAAC000045 | LC FILTER | 2 | |
| | | | | |
| IC8009,10 | C3ABRG000061 | IC | 2 | |
| IC8022 | C0ZBZ0001052 | IC | 1 | |
| IC8200 | C0FBBK000038 | IC | 1 | |
| IC8201 | C0ABBB000190 | IC | 1 | |
| IC8202 | C0JBAS000245 | IC | 1 | |
| IC8203,04 | C0JBAS000223 | IC | 2 | |
| IC8205 | C0ABBA000025 | IC | 1 | |
| IC8206 | C1AB00002471 | IC | 1 | PAVCA |
| IC8211 | MN884321B | IC | 1 | |
| IC8227 | C0EBE0000336 | IC | 1 | |
| IC8228 | C0EBM0000027 | IC | 1 | |
| IC8229 | C3EBJC000055 | IC | 1 | |
| IC8235 | C0DBZFF00004 | IC | 1 | |
| IC8240 | MN2WS0025B-A | IC | 1 | |
| IC8244 | C0FBAK000024 | IC | 1 | |
| IC8246,47 | C0DBAYY00054 | IC | 2 | |
| IC8254 | TVRN838S | IC | 1 | PAVCA |
| | | | | |
| L8096 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8141-43 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| L8200-03 | J0JHC0000045 | CHIP INDUCTOR | 4 | |
| L8209 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8211 | ELJNA1R0JFB | INDUCTION COIL | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| L8221 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8223-25 | J0JHC0000045 | CHIP INDUCTOR | 3 | |
| L8239 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L8240 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8242 | J0JCC0000078 | CHIP INDUCTOR | 1 | |
| L8243 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| L8244 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8250 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8253-56 | TSK1032 | BEAD CHOKE | 4 | |
| L8258 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8264-68 | J0JHC0000045 | CHIP INDUCTOR | 5 | |
| L8283-85 | J0JHC0000045 | CHIP INDUCTOR | 3 | |
| L8288,89 | J0JHC0000045 | CHIP INDUCTOR | 2 | |
| L8290 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L8291 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L8292 | G1C1R5ZA0083 | INDUCTION COIL | 1 | |
| L8293 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L8294 | J0JHC0000034 | CHIP INDUCTOR | 1 | |
| L8297 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8298,99 | TSK1032 | BEAD CHOKE | 2 | |
| L8303,04 | G1CR22JA0020 | INDUCTION COIL | 2 | PAVCA |
| L8305 | G1CR39JA0020 | INDUCTION COIL | 1 | PAVCA |
| L8306 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| | | | | |
| Q8209-11 | B1ADDF000005 | TRANSISTOR | 3 | |
| Q8217-20 | B1ABDF000034 | TRANSISTOR | 4 | |
| Q8227,28 | B1ADDF000005 | TRANSISTOR | 2 | |
| Q8229,30 | B1MBDDA00003 | TRANSISTOR | 2 | |
| | | | | |
| R8137 | ERJ2GEJ121 | M 120 OHM, J,0.063W | 1 | |
| R8140,41 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |
| R8144-47 | D1HG5608A002 | NETWORK RESISTER | 4 | |
| R8148,49 | D1HG3908A002 | NETWORK RESISTER | 2 | |
| R8150-62 | ERJ2GEJ390 | M 39 OHM, J,0.063W | 13 | |
| R8163-66 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 4 | |
| R8200-03 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 4 | |
| R8206 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8207 | ERJ2GEJ562 | M 5.6KOHM,J,0.063W | 1 | |
| R8208 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8209 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R8210 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8211 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8216 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8217 | ERJ2GEJ562 | M 5.6KOHM,J,0.063W | 1 | |
| R8218 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8219 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R8220 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R8228 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8270 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R8272 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8273,74 | ERJ3GEYJ510 | M 51 OHM,J,1/16W | 2 | |
| R8277 | ERJ3EKF1202 | M 12KOHM, 1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R8282 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R8285 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8287 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8288 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8289,90 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8291 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8293 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8297 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R8300 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8301 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8303 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8304,05 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8310,11 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8312 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8313 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8314,15 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R8316-18 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |
| R8322-25 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 4 | |
| R8333-36 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 4 | |
| R8338 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8342 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8343 | ERJ2GEJ181 | M 180 OHM, J,0.063W | 1 | |
| R8344,45 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8347 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R8349 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8351 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8354 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8355 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8366-69 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 4 | |
| R8380 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8417,18 | D1HG1218A002 | NETWORK RESISTER | 2 | |
| R8421 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8424 | ERJ3EKF2742 | M27.4KOHM, 1/16W | 1 | |
| R8425 | ERJ3EKF9311 | M9.31KOHM, 1/16W | 1 | |
| R8426-28 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R8431 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8433 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8435 | ERJ3EKF6191 | M6.19KOHM, 1/16W | 1 | |
| R8436 | ERJ3EKF4642 | M46.4KOHM, 1/16W | 1 | |
| R8440 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8455 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8458 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8460 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8461 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8462,63 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R8464,65 | EXB2HV104JV | RESISTOR ARRAY | 2 | |
| R8468 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R8470 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8471 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8476 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8477 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 1 | |
| R8478 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8479,80 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 2 | |
| R8481 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8483-87 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 5 | |
| R8488 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8489 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8490 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8491-94 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 4 | |
| R8496 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8501 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8503 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8504-06 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R8507-09 | ERJ3EKF1002 | M 10KOHM, 1/16W | 3 | |
| R8510 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8511 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8512-18 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 7 | |
| R8519 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8524 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8525,26 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8527 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8528 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8529,30 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8531 | EXB38V560J | RESISTOR ARRAY | 1 | |
| R8532-35 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 4 | |
| R8536 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8537 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8538 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8539 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8540 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8541-47 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 7 | |
| R8548 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8550,51 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8552 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8553 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8557 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8558 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8559 | EXB38V560J | RESISTOR ARRAY | 1 | |
| R8560 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8561 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8562 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8564,65 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8566 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8567 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8568 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8570-73 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 4 | |
| R8574 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8576-78 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 3 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R8582-89 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 8 | |
| R8591-95 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 5 | |
| R8596,97 | D1HG33080001 | NETWORK RESISTER | 2 | |
| R8598-00 | D1HG5608A002 | NETWORK RESISTER | 3 | |
| R8601 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8602 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8605-08 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 4 | |
| R8610-15 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 6 | |
| R8629 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8630 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8631 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R8632-37 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 6 | |
| R8640 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8641 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8643 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8645 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8646 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R8647 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8648 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8649 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R8650 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8651 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8652 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R8653 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8654,55 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 2 | |
| R8656 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8657 | ERJ3EKF2702V | M27.0KOHM, 1/16W | 1 | |
| R8658 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8659 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8661 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R8665 | EXB2HVR000 | RESISTOR ARRAY | 1 | |
| R8666 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8667 | ERJ2GEJ331 | M 330 OHM, J,0.063W | 1 | |
| R8669 | ERJ2GEJ331 | M 330 OHM, J,0.063W | 1 | |
| R8671,72 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R8673 | EXB2HVR000 | RESISTOR ARRAY | 1 | |
| R8674 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8678 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8682 | ERJ3EKF4702 | M 47KOHM, 1/16W | 1 | |
| R8686,87 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8688,89 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8690 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R8691 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8692 | ERJ3EKF5102 | M51.0KOHM, 1/16W | 1 | |
| R8693 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R8695 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R8696 | ERJ3EKF5102 | M51.0KOHM, 1/16W | 1 | |
| R8697 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R8698 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8700 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8702 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8704 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8705 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8706 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8707 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8708 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8709 | ERJ3EKF1272 | M12.7KOHM, 1/16W | 1 | |
| R8710 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8711 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8712 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8715 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8716 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8717 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8719 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8720-25 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 6 | |
| R8726 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8727 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8732 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8733 | ERJ3EKF3572 | M35.7KOHM, 1/16W | 1 | |
| R8734 | ERJ3EKF3242 | M32.4KOHM, 1/16W | 1 | |
| R8735 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8736 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8738 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R8741,42 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8744 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R8746 | ERJ3EKF4992 | M 49.9KOHM, 1/16W | 1 | |
| R8747,48 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R8749 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8751-53 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| R8754 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8755 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8756,57 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8777 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8779 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8780,81 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8782-87 | EXB38VR000 | RESISTOR ARRAY | 6 | |
| R8788 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8791 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R8792,93 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8794 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8799-02 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 4 | |
| R8817,18 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R8821-26 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 6 | |
| R8837,38 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8839 | ERJ3EKF6801 | M 6.8KOHM, 1/16W | 1 | |
| R8841 | ERJ3EKF1801 | M 1.8KOHM, 1/16W | 1 | |
| R8842 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8843 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R8844 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8845 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| | | | | |
| TU8200 | ENGE6408DF | TUNER | 1 | PAVCA ⚠ |
| | | | | |
| X8005 | H0J270500061 | CRYSTAL | 1 | |
| X8200 | H0J250500050 | CRYSTAL | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| XF8200 | J0C4405B0004 | LC FILTER | 1 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

# 8.3. Electrical Replacement Parts List (TH-50PX6U)

**Note:**

All parts except parts mentioned [PAVCA] in the Remarks column are supplied by PAVC-CSG.

Parts mentioned [PAVCA] are supplied by PAVCA.

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| F603 | K5D102BNA007 | TIME LAG FUSE HIGH | 1 | ⚠ |
| F601.602 | K5D103BMA001 | TIME LAG FUSE HIGH | 2 | ⚠ |
| | | | | |
| A101,02 | RA362MSV7 | ARRESTOR | 2 | ⚠ |
| | | | | |
| C10 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C20 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C21 | K1MN80BA0076 | 80P CONNECTOR | 1 | |
| C22 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C31 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C32 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C33 | K1KA04AA0150 | 4P CONNECTOR | 1 | |
| C41 | K1MN68BA0076 | 68P CONNECTOR | 1 | |
| C42 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C43 | K1KA12BA0107 | 12P CONNECTOR | 1 | |
| C44 | K1KA04BA0107 | 4P CONNECTOR | 1 | |
| C50 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C51 | K1MN80BA0076 | 80P CONNECTOR | 1 | |
| C52 | K1MN20BA0231 | 20P CONNECTOR | 1 | |
| C60 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| C101 | ECQU2A105ML | P 1UF, 250V | 1 | ⚠ |
| C102 | ECQU2A224ML | P 0.22UF, 250V | 1 | ⚠ |
| C103,04 | ECKENA221KBR | C 221P 250V | 2 | ⚠ |
| C106,07 | MMXC2W105K | C 1P 450V | 2 | |
| C108 | ECJ2XB1H223K | C 0.022UF, K, 50V | 1 | |
| C109 | ECJ2FB1H104K | C 0.1UF, K, 50V | 1 | |
| C110 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C111 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C112 | KZE1E470 | C 470U 25V | 1 | |
| C113 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C114 | ECJ2XC1H101J | C 100PF, J, 50V | 1 | |
| C115 | ECQE6472B45 | C 4700U 630V | 1 | |
| C116,17 | KMQ2W221L | C 220U 450V | 2 | |
| C118 | ECJ2FB1H104K | C 0.1UF, K, 50V | 1 | |
| C119 | ECKDNA331KB7 | C 330PF, Z, | 1 | ⚠ |
| C120 | ECJ2FB1H104K | C 0.1UF, K, 50V | 1 | |
| C121 | ECJ2XB1H223K | C 0.022UF, K, 50V | 1 | |
| C122,23 | ECJ2FB1H104K | C 0.1UF, K, 50V | 2 | |
| C127 | KMQ2W221L | C 220U 450V | 1 | |
| C128 | TBB106K1A | C 10U 10V | 1 | |
| C129 | ECJ2FB1H104K | C 0.1UF, K, 50V | 1 | |
| C201,02 | KZE1E470 | C 470U 25V | 2 | |
| C203,04 | RR3DD101K7 | C 100P 2KV | 2 | |
| C206 | ECWH8473HV | P 0.047PF, J, 8KV | 1 | |
| C251 | KMQ220901Z | C 900U 220V | 1 | |
| C253,54 | KMQ220901Z | C 900U 220V | 2 | |
| C256,57 | ECQE2473SKF | C 0.047U 250V | 2 | |
| C301 | KZE1E470 | C 470U 25V | 1 | |
| C302,03 | RR3DD101K7 | C 100P 2KV | 2 | |
| C305 | ECWH8183HV | C 0.018UF 800V | 1 | |
| C306 | KZE1E470 | C 470U 25V | 1 | |
| C351-53 | KZE1E182S | C 1800UF 25V | 3 | |
| C354,55 | ECQV1H474JL | P 0.47UF, J, 50V | 2 | |
| C356 | KZE1E821L | C 8200UF 25V | 1 | |
| C357 | TEB104K5 | C 0.1UF 50V | 1 | |
| C358 | KZE1E331S | C 330UF 25V | 1 | |
| C359 | TEB104K5 | C 0.1UF 50V | 1 | |
| C360 | KZE1E101 | C 100UF 25V | 1 | |
| C361 | TEB104K5 | C 0.1UF 50V | 1 | |
| C363 | KZE1E821L | C 8200UF 25V | 1 | |
| C364 | TEB104K5 | C 0.1UF 50V | 1 | |
| C365 | KZE2A270 | C 27UF 100V | 1 | |
| C401 | KZE2A270 | C 27UF 100V | 1 | |
| C402 | KZE2A471S | C 470UF 100V | 1 | |
| C404,05 | KZE2A471S | C 470UF 100V | 2 | |
| C501 | ECQU2A473ML | P 0.047UF, M,250V | 1 | ⚠ |
| C502,03 | ECJ2FB1H104K | C 0.1UF, K, 50V | 2 | |
| C504 | KZE1E101 | C 100UF 25V | 1 | |
| C505 | KZE1E470 | C 470U 25V | 1 | |
| C506 | KXG2W330 | C 330UF 450V | 1 | |
| C508 | ECJ2FB1H104K | C 0.1UF, K, 50V | 1 | |
| C509 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C510 | KZE1H101 | C 100UF 50V | 1 | |
| C514 | KZE1E101 | C 100UF 25V | 1 | |
| C515 | ECJ2FB1H104K | C 0.1UF, K, 50V | 1 | |
| C551 | ECKENA221KBR | C 220P 250V | 1 | ⚠ |
| C552 | KZE1E331S | C 330UF 25V | 1 | |
| C555 | TBB474K2 | C 0.47UF 25V | 1 | |
| C556 | KZE1E101 | C 100UF 25V | 1 | |
| C557 | TBB475K1 | C 4.7UF 16V | 1 | |
| C558 | KZE1A471 | C 470UF 10V | 1 | |
| C559-61 | TEB104K5 | C 0.1UF 50V | 3 | |
| C1106 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1111 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1116 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1118-23 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C1125 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1127-32 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C1133,34 | ECJ1XC1H150J | C 15PF, J, 50V | 2 | |
| C1135-42 | ECJ0EB1A104K | C 0.1UF, K, 10V | 8 | |
| C1144-50 | ECJ0EB1A104K | C 0.1UF, K, 10V | 7 | |
| C1151 | ECJ0EB1H101K | C 100PF, K, 50V | 1 | |
| C1152 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1153 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C1154 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1155 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C1156,57 | ECJ1XC1H220J | C 22PF, J, 50V | 2 | |
| C1158 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C1159 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1161 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1167,68 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C1169 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C1170-72 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C1178 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1190 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C1193,94 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C1197 | ECJ0EB1H101K | C 100PF, K, 50V | 1 | |
| C1209 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C1211 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C1215 | ECJ1XC1H561J | C 560PF, J, 50V | 1 | |
| C1219 | EEEHP1C100R | C 10PF, J, 16V | 1 | |
| C1221 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C1224 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C1226 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C1227 | ECJ0EB1H101K | C 100PF, K, 50V | 1 | |
| C1228-34 | EEEHB1C470P | C 47PF, J, 16V | 7 | |
| C2301 | ECA1EHG471 | E 470UF, 25V | 1 | |
| C2303 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2314 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2317 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2320 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2321 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C2322 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2323,24 | ECJ2FB1E224K | C 22UF, K, 25V | 2 | |
| C2325,26 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C2327 | F1J1H474A757 | C 0.47UF, 50V | 1 | |
| C2328-31 | ECJ2FB1E105K | C 1UF, K, 25V | 4 | |
| C2332,33 | ECA1EHG471 | E 470UF, 25V | 2 | |
| C2334,35 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C2336 | F1J1H474A757 | C 0.47UF, 50V | 1 | |
| C2337,38 | ECJ2FB1E224K | C 22UF, K, 25V | 2 | |
| C2341 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C2342 | ECJ2FB1E105K | C 1UF, K, 25V | 1 | |
| C2373 | ECJ1VF1H104Z | C 0.1UF, Z, 50V | 1 | |
| C2374 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2380 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2382 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2385 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2387 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2393,94 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2401 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2402 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C2403 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2417 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C2512 | ECJ3XB0J106M | C 10UF, M,6.3V | 1 | |
| C2515 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2603 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2606 | ECJ1VB1H332K | C 3300PF, K, 50V | 1 | |
| C2607 | ECJ2FB1C684K | C 68UF, Z, 16V | 1 | |
| C2608 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2609 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2610-14 | ECJ1VF1A105Z | C 1UF, Z, 10V | 5 | |
| C2615 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2616 | ECJ2FB1C684K | C 68UF, Z, 16V | 1 | |
| C2617 | ECJ1VB1H332K | C 3300PF, K, 50V | 1 | |
| C2620,21 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2624 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2625 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2626 | TCUY1C225ZFN | C 2.2UF, 16V | 1 | |
| C2632 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2633,34 | TCUY1C225ZFN | C 2.2UF, 16V | 2 | |
| C2636 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C2637 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2642 | ECJ2FB1C474K | C 0.47UF, Z, 16V | 1 | |
| C2643 | ECJ1VB1H152K | C 1500PF, K, 50V | 1 | |
| C2644 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C2645 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2649,50 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2651 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2652 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2656 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2657 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2658 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2660,61 | ECJ1VB1C105K | C 0.01UF, K, 16V | 2 | |
| C2662 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2663 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2665,66 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C2667 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2668 | ECJ1VB1C103K | C 0.010UF, K, 16V | 1 | |
| C2670 | ECJ2VF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2672 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2673 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C2675 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2676 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2677 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2678 | ECJ2FB1A105K | C 1UF, K, 10V | 1 | |
| C2679-82 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C2684 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C2685 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2686-89 | ECJ2FB1A105K | C 1UF, K, 10V | 4 | |
| C2694 | ECJ2XB1C154K | C 0.15PF, K, 16V | 1 | |
| C2697,98 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2699 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2700 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2701 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2702 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2703 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2705 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2706 | ECJ1VB1H152K | C 1500PF, K, 50V | 1 | |
| C2707 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2708 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2709 | ECJ2XB1C154K | C 0.15PF, K, 16V | 1 | |
| C2710 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2711 | ECJ1XC1H102J | C 1000PF, J, 50V | 1 | |
| C2712 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2713 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2714 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C2715 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2717 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2718 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2722 | ECJ2FB1C474K | C 0.47UF, Z, 16V | 1 | |
| C2723 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2725,26 | ECA1HHG100 | E 10UF, 50V | 2 | |
| C2727,28 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2729 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C2730 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2731 | ECJ1VF1H104Z | C 0.1UF, Z, 50V | 1 | |
| C2732 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2733 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2734 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2735 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2737 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2739 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2741 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2743 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C2744 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2746 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2747 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C2750 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2751-54 | ECJ1VF1A105Z | C 1UF, Z, 10V | 4 | |
| C2756 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2757 | ECA1CMH101 | E 100UF, 16V | 1 | |
| C2762 | TCUY1C225ZFN | C 2.2UF, 16V | 1 | |
| C2768-71 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 4 | |
| C2773 | ECA1HHG220 | E 22UF, 50V | 1 | |
| C2774 | ECA1HHG100 | E 10UF, 50V | 1 | |
| C2775 | ECA1EHG471 | E 470UF, 25V | 1 | |
| C2777,78 | TCUY1C225ZFN | C 2.2UF, 16V | 2 | |
| C2779,80 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2783 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2784,85 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2790 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C2791 | F2A1H4700036 | E 47UF, 50V | 1 | PAVCA |
| C2792,93 | ECJ1VF1A105Z | C 1UF, Z, 10V | 2 | |
| C2798 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C2801 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C2802 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C4003-08 | F1J0J1060004 | C 0.010UF, K, 16V | 6 | |
| C4014,15 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C4023 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4026 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C4027 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4028 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4112 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4117 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4158 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4159 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4160 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4165 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4168 | ECJ1XC1H680J | C 68PF, J, 50V | 1 | |
| C4171 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C4172,73 | F1H1C104A065 | C 0.1UF, K, 16V | 2 | |
| C4174 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4175 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4176 | ECJ1VB0J225K | C 2.2UF, K, 6.3V | 1 | |
| C4177 | ECJ2FB1C684K | C 68UF, Z, 16V | 1 | |
| C4178 | ECJ1XB1C393K | C 0.039UF, K, 16V | 1 | |
| C4180 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4185,86 | ECJ3XB0J106M | C 10UF, M,6.3V | 2 | |
| C4188 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4189-91 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4199 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4200 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4201 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4204 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4205,06 | F1H1C104A065 | C 0.1UF, K, 16V | 2 | |
| C4208,09 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4211 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4215 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4216 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4217 | F1H1C104A065 | C 0.1UF, K, 16V | 1 | |
| C4218 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4219 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4224 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4227 | ECJ1VB1C823K | C 0.082UF, K, 16V | 1 | |
| C4228 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4235 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4244 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4245 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4248 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4253 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4256 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4262-64 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4266 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4269 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4272 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4273 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4281-84 | ECJ0EB1A104K | C 0.1UF, K, 10V | 4 | |
| C4287,88 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4289,90 | EEEHB0J330R | C 33PF, J, 6.3V | 2 | |
| C4291,92 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4296 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4297 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4298-06 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 9 | |
| C4307-09 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4310 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4311 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4313,14 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4315 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4316-18 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4320-22 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4325 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C4327 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4329,30 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4331 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4332 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4333-38 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C4339 | ECJ1VB0J225K | C 2.2UF, K, 6.3V | 1 | |
| C4340 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C4341 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C4342 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4343 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C4344,45 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C4346 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4347 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4348 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C4349 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4350,51 | ECJ1XC1H181J | C 180PF, J, 50V | 2 | |
| C4352,53 | ECJ1XC1H330J | C 33PF, J, 50V | 2 | |
| C4354 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4360 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4362 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C4363,64 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4365 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4366 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4367 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4371 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4372 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4373 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4374 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4375,76 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4377 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4379 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4380 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4381,82 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4383 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4384 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4385 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4386 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4387 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4388 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4389 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4390 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4391 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4392 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4393,94 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4395 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4396 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4397,98 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4399,00 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4401 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4402,03 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4404 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4405 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4406 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4407,08 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4409 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4410 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4411,12 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4413,14 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4415 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4417 | F2G0J470A019 | E 47UF 6.3V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C4418,19 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 2 | |
| C4420,21 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4422-24 | ECJ0EB1H102K | C 1000PF, K, 50V | 3 | |
| C4425,26 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4427 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4428 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4429,30 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4434 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4435 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4436-39 | ECJ0EB1H102K | C 1000PF, K, 50V | 4 | |
| C4440 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4441,42 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4447 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4448 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4451 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4452 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4453,54 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4455 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4456 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4457,58 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4459 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4460 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4461 | ECJ1XC1H820J | C 82PF, J, 50V | 1 | |
| C4462 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4464 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4465 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4466 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4467 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4470 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4474 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4475,76 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4477 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4478 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4479-81 | ECJ0EB1H102K | C 1000PF, K, 50V | 3 | |
| C4482 | ECJ1XC1H180J | C 18PF, J, 50V | 1 | |
| C4483 | ECJ1XC1H150J | C 15PF, J, 50V | 1 | |
| C4493 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4494 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4496 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4497 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C4498 | ECJ1XC1H471J | C 470PF, J, 50V | 1 | |
| C4499 | EEFCD0G560ER | 56UF, | 1 | |
| C4501 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4502 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4503 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4504 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4505 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4506 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4507 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4508 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4509-11 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C4512 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4513 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4514 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4515,16 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4517 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4518 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4519 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4520 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4521 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4522 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4523 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4524 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4525 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4526 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4527 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C4528 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C4529 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4530,31 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C4532,33 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C4534 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4535 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4536 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4537 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C4538 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4539 | ECJ1VB1A105K | C 0.01UF, Z, 50V | 1 | |
| C4540 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C4541 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C4544 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C5605 | EEUFC1E471 | E 470UF, 25V | 1 | |
| C5606 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5609 | ECA1HM220 | E 22UF, 50V | 1 | |
| C5611 | F2A1H331A257 | E 330UF, 50V | 1 | |
| C5612 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5613 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5616 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5617 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5618,19 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C5622 | ECA1CM471 | E 470UF, 16V | 1 | |
| C5623 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5626 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5633 | ECA1EM221 | E 220UF, 25V | 1 | |
| C5637 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5641-44 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 4 | |
| C5645 | ECA1CHG470 | E 47UF, 16V | 1 | |
| C5646 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C5647 | ECA1CHG470 | E 47UF, 16V | 1 | |
| C5648 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C5670 | ECJ1VB1E104K | C 0.10UF, K, 25V | 1 | |
| C5672 | ECA1HHG100 | E 10UF, 50V | 1 | |
| C5673 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5801,02 | EEUFC1E471 | E 470UF, 25V | 2 | |
| C5804 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C5805 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C5809 | ECJ3XF1E105Z | C 1UF, Z, 25V | 1 | |
| C5810 | ECA1EHG470 | E 47UF, 25V | 1 | |
| C6001 | F1L2J562A022 | C 5600UF, K,6.3V | 1 | |
| C6011-16 | F2A2T201A001 | E 200UF, | 6 | |
| C6023 | F1L2J562A022 | C 5600UF, K,6.3V | 1 | |
| C6031 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6041-44 | TCUY1C105ZFN | C 1UF, 16V | 4 | |
| C6105 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6111,12 | F2A2D221A022 | E 220UF, 200V | 2 | |
| C6132 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6134,35 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6151 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6152-55 | F1L1E4750004 | C 4.7UF, 25V | 4 | |
| C6192 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6194,95 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6201-04 | F0C2E405A176 | E 0.040UF, 250V | 4 | |
| C6211,12 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6213 | F2A1E102A220 | E 1000UF, 25V | 1 | |
| C6221 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6241 | ECA1EM471 | E 470UF, 25V | 1 | |
| C6242 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6243 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C6251 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6262,63 | F2A2A471A072 | E 470UF, 100V | 2 | |
| C6272,73 | EEUFC1E221 | E 220UF, 25V | 2 | |
| C6401-03 | F1L2J222A022 | C 2200UF, K,6.3V | 3 | |
| C6411-16 | F2A2T201A001 | E 200UF, | 6 | |
| C6421-24 | F1L2J222A022 | C 2200UF, K,6.3V | 4 | |
| C6431 | F0C2E405A176 | E 0.040UF, 250V | 1 | |
| C6472 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6480 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6502 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6504,05 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6512-15 | F0C2E405A176 | E 0.040UF, 250V | 4 | |
| C6521 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6522 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6524,25 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6527 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6561 | F2A1A1010074 | E 100UF, 10V | 1 | |
| C6562 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6563 | F2A1A1010074 | E 100UF, 10V | 1 | |
| C6564 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6565,66 | ECJ2XB1H103K | C 0.01UF, K, 50V | 2 | |
| C6581 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6582 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6592 | ECA1EM471 | E 470UF, 25V | 1 | |
| C6593 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6601,02 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6603 | F1K2J102A014 | C 1000UF, K,6.3V | 1 | |
| C6604 | F2A2V470A020 | E 47UF, 350V | 1 | |
| C6605 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6606 | F1K2J102A014 | C 1000UF, K,6.3V | 1 | |
| C6610 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6611 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6612 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6620 | ECJ3XB2J222K | C 2200PF, K,630V | 1 | |
| C6641 | ECQE2105RKB | P 1UF, 250V | 1 | |
| C6661,62 | F1K2J102A014 | C 1000UF, K,6.3V | 2 | |
| C6671 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6681,82 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6683 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6691 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6701-08 | ECJ2XB1H104K | C 0.1UF, K, 50V | 8 | |
| C6721 | ECA1HM101 | E 100UF, 50V | 1 | |
| C6723-25 | F1L1E4750004 | C 4.7UF, 25V | 3 | |
| C6726,27 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C6728 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6752 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6753 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6754 | ECA1VM470 | E 47UF, 35V | 1 | |
| C6755 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6771 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6772,73 | F1L1E4750004 | C 4.7UF, 25V | 2 | |
| C6775 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6776,77 | ECJ2XB1H104K | C 0.1UF, K, 50V | 2 | |
| C6791 | EEUFC1E221 | E 220UF, 25V | 1 | |
| C6795,96 | EEUFC1E221 | E 220UF, 25V | 2 | |
| C6801 | F2A2E470A022 | E 47UF, 250V | 1 | |
| C6802 | ECQE6223KF | P 0.022UF, K,400V | 1 | |
| C6803 | ECKD3D221KBP | C 220PF, K, 2KV | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C6804 | F2A2E100A022 | E 10UF, 250V | 1 | |
| C6805 | ECJ2XC1H102J | C 1000PF, J, 50V | 1 | |
| C6806 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6807 | ECJ2XC1H471J | C 470PF, J, 50V | 1 | |
| C6811 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6812 | F1L1E4750004 | C 4.7UF, 25V | 1 | |
| C6813 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6814 | ECA1VM151 | E 150UF, 35V | 1 | |
| C6815 | ECJ2XB1H104K | C 0.1UF, K, 50V | 1 | |
| C6822 | F2A2V100A019 | E 10UF, 350V | 1 | |
| C6823 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6841 | ECA2DHG101 | E 100UF, 200V | 1 | |
| C6842 | ECA2CM101 | E 100UF, 160V | 1 | |
| C6845 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6861 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6862 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6863 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6871 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6872 | ECJ3YB1E105K | C 1UF, K, 25V | 1 | |
| C6873 | ECJ2XB1H103K | C 0.01UF, K, 50V | 1 | |
| C6901 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6902 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6904 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6906 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6908 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6910 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6912 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6914-18 | ECJ2XB1H221K | C 220PF, K, 50V | 5 | |
| C6931 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6932-35 | F1L2E105A013 | E 0.10UF, 25V | 4 | |
| C6951 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6952 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6955 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6957,58 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C6961 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6963 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C6964-68 | ECJ2XB1H221K | C 220PF, K, 50V | 5 | |
| C6981 | ECJ2XB1H102K | C 1000PF, K, 50V | 1 | |
| C6982-85 | F1L2E105A013 | E 0.10UF, 25V | 4 | |
| C7103 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7105 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7106 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7108 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7109 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7112 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7114 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7115 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7117 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7118 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7121 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7123 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7124 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7126 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7127,28 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7130 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7201-03 | TCUY1C105ZFN | C 1UF, 16V | 3 | |
| C7205 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7206 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7208 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7210 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7213 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7215 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7216 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7218 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7221,22 | ECJ1XC1H101J | C 100PF, J, 50V | 2 | |
| C7225 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7226 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C7228 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7229,30 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7232 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7233,34 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7236 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7237,38 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7240 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7241 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7243 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7247 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7249 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7251 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7302 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7306,07 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7309,10 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7311,12 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7313-15 | ECJ1XC1H101J | C 100PF, J, 50V | 3 | |
| C7316,17 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7318 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7319 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7321 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7322 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7331 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7333 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7334,35 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7337 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7338,39 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7341 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7342 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7403 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7405 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7406 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7407 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7408 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7411 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7413 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7414 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7415 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7416 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7419 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7421 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7422 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7423 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7424 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7427 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7429 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7430 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7431 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7432,33 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7435 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7440-43 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C7502 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7504 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7506 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7508 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7509 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7510 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7511 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7513,14 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C7517 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7518 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7521 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7523 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C7524 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7525 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7527 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7528,29 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7531 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7532,33 | ECJ3XB2A474K | C 0.47UF, 6.3V | 2 | |
| C7535 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7536 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7557 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7559 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7560 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7562 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7564 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7566 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C7603 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7605 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7606 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7607 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7608 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7611 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7613 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7614 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7615 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7616 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7619 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7621 | TCUY1C105ZFN | C 1UF, 16V | 1 | |
| C7622 | ECJ3XB2A474K | C 0.47UF, 6.3V | 1 | |
| C7623 | ECJ1XC1H101J | C 100PF, J, 50V | 1 | |
| C7624,25 | TCUY1C105ZFN | C 1UF, 16V | 2 | |
| C7626 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9028,29 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C9033,34 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C9035,36 | F1J0J1060004 | C 0.010UF, K, 16V | 2 | |
| C9037 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C9039 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9040 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9044-53 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 10 | |
| C9055-57 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 3 | |
| C9058 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9300-25 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 26 | |
| C9327-51 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 25 | |
| C9352 | EEFCD0G560ER | 56UF, | 1 | |
| C9355-59 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 5 | |
| C9360-64 | ECJ3XB0J106M | C 10UF, M,6.3V | 5 | |
| C9365 | EEFCD0G560ER | 56UF, | 1 | |
| C9366,67 | ECJ1VF1H103Z | C 0.010UF, Z, 50V | 2 | |
| C9368 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9442-70 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 29 | |
| C9472-96 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 25 | |
| C9497 | EEFCD0G560ER | 56UF, | 1 | |
| C9512,13 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C9514,15 | ECJ2VF1C105Z | C 1UF, Z, 16V | 2 | |
| C9516-25 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 10 | |
| C9526 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9527-30 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 4 | |
| C9531 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9532 | ECJ1XC1H101K | C 100PF, K, 50V | 1 | |
| C9533 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C9534-38 | ECJ3XB0J106M | C 10UF, M,6.3V | 5 | |
| C9539 | EEFCD0G560ER | 56UF, | 1 | |
| C9540,41 | ECJ1VF1H103Z | C 0.010UF, Z, 50V | 2 | |
| C9542 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9546,47 | ECJ1VC1H120J | C 12PF, J, 50V | 2 | |
| C9548 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9552 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9554 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9557 | ECJ2VF1C105Z | C 1UF, Z, 16V | 1 | |
| C9601 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9608 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9800 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9801 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C9802 | ECJ1XC1H470J | C 47PF, J, 50V | 1 | |
| C9803 | ECJ1VB1H472K | C 4700PF, K, 50V | 1 | |
| C9804 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9805 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9806 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C9807,08 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9809 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9815,16 | ECGRL0G680ER | C 68PF, J, 4V | 2 | |
| C9817,18 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9822 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9823,24 | ECJ3YB1E106M | C 10 UF, K, 25V | 2 | |
| C9825 | ECJ1XC1H101K | C 100PF, K, 50V | 1 | |
| C9826 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9827 | F1J0J1060004 | C 0.010UF, K, 16V | 1 | |
| C9830-32 | ECJ3XB1C106M | C 1.0UF, K, 16V | 3 | |
| C9833 | ECJ3YB1E106M | C 10 UF, K, 25V | 1 | |
| C9837 | ECJ3XB1C106M | C 1.0UF, K, 16V | 1 | |
| C9838 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9840 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9841,42 | ECJ2VF1C105Z | C 1UF, Z, 16V | 2 | |
| C9843 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 1 | |
| C9844 | ECJ1VF1H103Z | C 0.010UF, Z, 50V | 1 | |
| C9845,46 | ECJ1XF1C104Z | C 0.1UF, Z, 16V | 2 | |
| C9847,48 | ECJ1VB1E104K | C 0.10UF, K, 25V | 2 | |
| C9880,81 | ECJ1XB1H102K | C 1000UF, Z, 50V | 2 | |
| C9882 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9883 | ECJ1VB1H822K | C 8200PF, K, 50V | 1 | |
| C9884 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C9885 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C9886 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9887 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9891 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9896 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9897 | ECJ1VB1H822K | C 8200PF, K, 50V | 1 | |
| C9898 | ECJ1VC1H100C | C 10PF, C, 50V | 1 | |
| C9899 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C9926 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| C9967 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C9971 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 1 | |
| | | | | |
| CA1-11 | K1MN68BA0002 | 68P CONNECTOR | 11 | |
| | | | | |
| CB1-11 | K1MN68BA0002 | 68P CONNECTOR | 11 | |
| | | | | |
| D3 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| D5 | K1KB31BA0064 | 31P CONNECTOR | 1 | |
| D6 | K1KA21A00011 | 21P CONNECTOR | 1 | |
| D20 | K1KA20BA0296 | 20P CONNECTOR | 1 | |
| D25 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| D31 | K1MN80BA0076 | 80P CONNECTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D32 | K1MN55BA0076 | 55P CONNECTOR | 1 | |
| D33 | K1MN68BA0076 | 68P CONNECTOR | 1 | |
| D34 | K1MN80BA0076 | 80P CONNECTOR | 1 | |
| D101,02 | MA111 | DIODE | 2 | |
| D104 | S3V60 | DIODE | 1 | |
| D107 | MA111 | DIODE | 1 | |
| D109 | ERA15-10 | DIODE | 1 | |
| D201,02 | MA165 | DIODE | 2 | |
| D203,04 | MA728 | DIODE | 2 | |
| D251 | YG901C3R | DIODE | 1 | |
| D252 | MA111 | DIODE | 1 | |
| D253-55 | YG901C3R | DIODE | 3 | |
| D301,02 | MA165 | DIODE | 2 | |
| D303,04 | MA728 | DIODE | 2 | |
| D351,52 | YG805C06R | DIODE | 2 | |
| D355 | AG01A | DIODE | 1 | |
| D401 | YG901C3R | DIODE | 1 | |
| D402 | AG01 | DIODE | 1 | |
| D403 | YG901C3R | DIODE | 1 | |
| D501 | S1WBA80 | DIODE | 1 | ⚠ |
| D502,03 | ERA22-10 | DIODE | 2 | |
| D505 | MA111 | DIODE | 1 | |
| D506 | ST3D82 | DIODE | 1 | |
| D508 | AG01A | DIODE | 1 | |
| D511 | ERA91-02 | DIODE | 1 | |
| D551 | RK39 | DIODE | 1 | |
| D554 | MA165 | DIODE | 1 | |
| D555 | MA111 | DIODE | 1 | |
| D556 | MA165 | DIODE | 1 | |
| D1106,07 | MA729 | DIODE | 2 | |
| D1109 | B0JCCE000008 | DIODE | 1 | |
| D1111-13 | MA111 | DIODE | 3 | |
| D1117 | MA3036L | ZENER DIODE | 1 | |
| D1119 | MA704A | DIODE | 1 | |
| D1120 | MA728 | DIODE | 1 | |
| D2309 | MA111 | DIODE | 1 | |
| D2512 | MA8056-M | ZENER DIODE | 1 | |
| D2520 | B3AAA0000770 | LED | 1 | |
| D2524 | MA8056-M | ZENER DIODE | 1 | |
| D2529 | MA8056-M | ZENER DIODE | 1 | |
| D2600-03 | MA111 | DIODE | 4 | |
| D2617 | MA152 | DIODE | 1 | |
| D2619-24 | MA8140M | ZENER DIODE | 6 | |
| D2640-60 | MA8140M | ZENER DIODE | 21 | |
| D2661 | MA3X78900L | ZENER DIODE | 1 | |
| D2662 | B0BC03900015 | ZENER DIODE | 1 | |
| D2663,64 | MA111 | DIODE | 2 | |
| D2665 | MA8110M | ZENER DIODE | 1 | |
| D4019-38 | EZJZ0V80008B | VARISTOR | 20 | |
| D4041 | EZJZ0V80008B | VARISTOR | 1 | |
| D4044,45 | EZJZ0V80008B | VARISTOR | 2 | |
| D4047,48 | MA3056M | ZENER DIODE | 2 | |
| D4049-52 | B0HCMM000014 | DIODE | 4 | |
| D5606 | B0BC01100001 | ZENER DIODE | 1 | |
| D5607 | B0BC6R600005 | ZENER DIODE | 1 | |
| D5610 | B0BC4R700007 | ZENER DIODE | 1 | |
| D5612 | B0BC3R700006 | ZENER DIODE | 1 | |
| D5634 | MA111 | DIODE | 1 | |
| D5635 | MA3047H | ZENER DIODE | 1 | |
| D5637,38 | MA152 | DIODE | 2 | |
| D5639 | MA3047H | ZENER DIODE | 1 | |
| D5640 | MA3039H | ZENER DIODE | 1 | |
| D5641 | MA152 | DIODE | 1 | |
| D5642 | MA3120M | ZENER DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D5643 | MA152 | DIODE | 1 | |
| D5644 | MA3068M | ZENER DIODE | 1 | |
| D5646,47 | MA152 | DIODE | 2 | |
| D5649 | MA111 | DIODE | 1 | |
| D5801 | B0JCME000037 | DIODE | 1 | |
| D5804 | MA3120M | ZENER DIODE | 1 | |
| D5805,06 | MA152 | DIODE | 2 | |
| D5807 | MA111 | DIODE | 1 | |
| D6001 | B0HBSN000008 | DIODE | 1 | |
| D6021,22 | B0HBSN000008 | DIODE | 2 | |
| D6032 | MA111 | DIODE | 1 | |
| D6041 | B0ECHP000003 | DIODE | 1 | |
| D6051 | B0ECHP000003 | DIODE | 1 | |
| D6061,62 | B0HBSN000008 | DIODE | 2 | |
| D6071,72 | B0HBSN000008 | DIODE | 2 | |
| D6081,82 | B0HBSN000008 | DIODE | 2 | |
| D6091 | B0HBSN000008 | DIODE | 1 | |
| D6092 | B0ECHP000003 | DIODE | 1 | |
| D6101-04 | B0JCME000037 | DIODE | 4 | |
| D6105 | MA111 | DIODE | 1 | |
| D6131,32 | B0ECHP000003 | DIODE | 2 | |
| D6151-54 | B0ECHP000003 | DIODE | 4 | |
| D6191-93 | B0ECHP000003 | DIODE | 3 | |
| D6211 | B0JCME000037 | DIODE | 1 | |
| D6212 | B0ECHP000003 | DIODE | 1 | |
| D6221 | B0ECHP000003 | DIODE | 1 | |
| D6222,23 | MA111 | DIODE | 2 | |
| D6251,52 | MA8330M | ZENER DIODE | 2 | |
| D6253 | LNJ301MPUJA | LED | 1 | |
| D6254 | MA8051L | ZENER DIODE | 1 | |
| D6255 | MA111 | DIODE | 1 | |
| D6401 | B0HBSN000008 | DIODE | 1 | |
| D6404 | B0HBSN000008 | DIODE | 1 | |
| D6431,32 | B0HBSP000019 | DIODE | 2 | |
| D6441 | B0ECHP000003 | DIODE | 1 | |
| D6451 | B0ECHP000003 | DIODE | 1 | |
| D6461,62 | B0HBSN000008 | DIODE | 2 | |
| D6466 | MA111 | DIODE | 1 | |
| D6471 | B0HBSN000008 | DIODE | 1 | |
| D6472 | B0ECHP000003 | DIODE | 1 | |
| D6477 | MA111 | DIODE | 1 | |
| D6478 | B0HCKS000002 | DIODE | 1 | |
| D6480 | MA111 | DIODE | 1 | |
| D6481,82 | B0HBSN000008 | DIODE | 2 | |
| D6491 | B0HBSP000019 | DIODE | 1 | |
| D6497 | MA111 | DIODE | 1 | |
| D6501,02 | B0ECHP000003 | DIODE | 2 | |
| D6521-24 | B0ECHP000003 | DIODE | 4 | |
| D6581,82 | MA8330M | ZENER DIODE | 2 | |
| D6583 | LNJ301MPUJA | LED | 1 | |
| D6584 | MA8051L | ZENER DIODE | 1 | |
| D6585 | MA111 | DIODE | 1 | |
| D6601 | MA8240M | ZENER DIODE | 1 | |
| D6602 | B0ECHP000003 | DIODE | 1 | |
| D6603 | MA8240M | ZENER DIODE | 1 | |
| D6604 | MA111 | DIODE | 1 | |
| D6605 | MA8051L | ZENER DIODE | 1 | |
| D6606 | B0HCMM000014 | DIODE | 1 | |
| D6607 | MA111 | DIODE | 1 | |
| D6610 | MAZ81500ML | ZENER DIODE | 1 | |
| D6611-14 | MA111 | DIODE | 4 | |
| D6619,20 | B0HCKS000002 | DIODE | 2 | |
| D6621-24 | B0HDSM000005 | DIODE | 4 | |
| D6641,42 | B0HCKS000002 | DIODE | 2 | |
| D6643 | MA111 | DIODE | 1 | |
| D6644 | B0HCKS000002 | DIODE | 1 | |
| D6661 | MA111 | DIODE | 1 | |
| D6662-64 | MA8330M | ZENER DIODE | 3 | |
| D6665 | MA8051L | ZENER DIODE | 1 | |
| D6666,67 | MA111 | DIODE | 2 | |
| D6671 | MA111 | DIODE | 1 | |
| D6682 | B0HCMM000014 | DIODE | 1 | |
| D6683,84 | MA111 | DIODE | 2 | |
| D6686,87 | MA111 | DIODE | 2 | |
| D6701,02 | MA8056H | ZENER DIODE | 2 | |
| D6721 | B0HCKS000002 | DIODE | 1 | |
| D6723,24 | B0JCME000037 | DIODE | 2 | |
| D6725 | B0ECHP000003 | DIODE | 1 | |
| D6726-33 | MA8056H | ZENER DIODE | 8 | |
| D6734 | MA111 | DIODE | 1 | |
| D6752 | B0JCME000037 | DIODE | 1 | |
| D6758 | B0ECHP000003 | DIODE | 1 | |
| D6760,61 | MA111 | DIODE | 2 | |
| D6771 | B0JCME000037 | DIODE | 1 | |
| D6773 | B0HCKS000002 | DIODE | 1 | |
| D6791 | MA8200M | ZENER DIODE | 1 | |
| D6802 | B0BC01000044 | ZENER DIODE | 1 | |
| D6803 | B0HCKS000002 | DIODE | 1 | |
| D6804 | B0ECHP000003 | DIODE | 1 | |
| D6805 | MA111 | DIODE | 1 | |
| D6806 | B0ECHP000003 | DIODE | 1 | |
| D6807-10 | B0HCMM000014 | DIODE | 4 | |
| D6820-23 | MA111 | DIODE | 4 | |
| D6825 | MA8330M | ZENER DIODE | 1 | |
| D6826 | MA111 | DIODE | 1 | |
| D6841 | B0HCKS000002 | DIODE | 1 | |
| D6842,43 | MA111 | DIODE | 2 | |
| D6859 | B0ECHP000003 | DIODE | 1 | |
| D6860 | B0HCKS000002 | DIODE | 1 | |
| D6861 | MA8051L | ZENER DIODE | 1 | |
| D6862 | MA111 | DIODE | 1 | |
| D6871 | MA8051L | ZENER DIODE | 1 | |
| D6872 | MA111 | DIODE | 1 | |
| D6901,02 | MA8056H | ZENER DIODE | 2 | |
| D6903,04 | B0ECHP000003 | DIODE | 2 | |
| D6951,52 | MA8056H | ZENER DIODE | 2 | |
| D6953,54 | B0ECHP000003 | DIODE | 2 | |
| D9017-19 | MA3033 | ZENER DIODE | 3 | |
| D9020 | MA728 | DIODE | 1 | |
| D9035 | MA728 | DIODE | 1 | |
| D9100-03 | B0JCGD000002 | DIODE | 4 | |
| D9105,06 | B0JCGD000002 | DIODE | 2 | |
| D9110 | B0JCGD000002 | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D9300,01 | MA152K | DIODE | 2 | |
| D9400,01 | MA152K | DIODE | 2 | |
| D9800 | B0JCME000037 | DIODE | 1 | |
| D9801 | B0JCDD000002 | DIODE | 1 | |
| D9802 | MA728 | DIODE | 1 | |
| D9804 | MA152K | DIODE | 1 | |
| D9807,08 | MA152K | DIODE | 2 | |
| D9812 | B0JCME000037 | DIODE | 1 | |
| D9813 | B0JCDD000002 | DIODE | 1 | |
| D9814 | B0JCME000037 | DIODE | 1 | |
| D9815 | B0JCDD000002 | DIODE | 1 | |
| | | | | |
| DG1 | K1KY80A00011 | 80P CONNECTOR | 1 | |
| DG2 | K1KA11B00083 | 11P CONNECTOR | 1 | |
| DG3 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| DG5 | K1KB21BA0063 | 21P CONNECTOR | 1 | |
| DG8,G9 | K1FY119D0001 | CONNECTOR | 2 | |
| DG15 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| DG20 | K1MN40B00045 | 40P CONNECTOR | 1 | |
| DG22 | K1KBB0A00009 | CONNECTOR | 1 | |
| | | | | |
| F201 | 216005BP | FUSE 250V 5A | 1 | ⚠ |
| F301 | 216005BP | FUSE 250V 5A | 1 | ⚠ |
| F501 | 216002BP | FUSE 250V 2A | 1 | ⚠ |
| | | | | |
| FL2606,07 | J0HABB000003 | LC FILTER | 2 | |
| FL2609 | J0HABB000003 | LC FILTER | 1 | |
| FL2611 | J0HABB000003 | LC FILTER | 1 | |
| FL4009-11 | J0HABH000012 | LC FILTER | 3 | |
| FL7201 | J0HABH000013 | LC FILTER | 1 | |
| FL7301 | J0HABH000013 | LC FILTER | 1 | |
| FL7501 | J0HABH000013 | LC FILTER | 1 | |
| FL9300 | F1J1E1040022 | C 0.10UF, Z, 25V | 1 | |
| FL9301 | J0HABH000013 | LC FILTER | 1 | |
| FL9302-04 | F1J1E1040022 | C 0.10UF, Z, 25V | 3 | |
| FL9305,06 | J0HABH000013 | LC FILTER | 2 | |
| FL9400,01 | J0HABH000013 | LC FILTER | 2 | |
| FL9402-04 | F1J1E1040022 | C 0.10UF, Z, 25V | 3 | |
| FL9501,02 | J0HABH000013 | LC FILTER | 2 | |
| FL9800,01 | J0HABH000013 | LC FILTER | 2 | |
| FL9803,04 | J0HABH000012 | LC FILTER | 2 | |
| FL9805-07 | J0HABH000013 | LC FILTER | 3 | |
| | | | | |
| H1 | K1KY80A00011 | 80P CONNECTOR | 1 | |
| H2 | K1KA11AA0105 | 1P CONNECTOR | 1 | |
| H40 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| H53 | K1KA12AA0194 | 12P CONNECTOR | 1 | |
| | | | | |
| HC01 | K1KA21A00011 | 21P CONNECTOR | 1 | |
| HC06 | K1KA07BA0047 | 7P CONNECTOR | 1 | |
| HC15 | K1KY40B00003 | 40P CONNECTOR | 1 | |
| HC21 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| HC22 | K1KA11AA0194 | 11P CONNECTOR | 1 | |
| | | | | |
| IC101 | FA5502P | CONTROL | 1 | |
| IC401 | AN1431T | LINEAR IC | 1 | |
| IC501 | MIP3E30MP | CONTROL | 1 | ⚠ |
| IC1101 | TVRN840S | IC | 1 | PAVCA |
| IC1102 | TVRN851S | IC | 1 | PAVCA |
| IC1103 | MN103SC50RGL | IC | 1 | |
| IC1105,06 | C0JBAS000128 | IC | 2 | |
| IC1108 | C0EBF0000354 | IC | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| IC1110 | C0CBCAD00016 | IC | 1 | |
| IC1111 | C0EBY0000041 | IC | 1 | |
| IC2302 | C1AB00002451 | IC | 1 | |
| IC2304 | C0ABBA000168 | IC | 1 | |
| IC2306 | C0ABBA000168 | IC | 1 | |
| IC2601 | C1AB00002123 | IC | 1 | |
| IC2602 | AN15862A-VT | IC | 1 | |
| IC2603 | C1BB00001017 | IC | 1 | |
| IC2604 | C1BB00000969 | IC | 1 | |
| IC2607 | C0DBAJB00004 | IC | 1 | |
| IC2608 | C0ABBA000168 | IC | 1 | |
| IC4013 | C0CBCBF00009 | IC | 1 | |
| IC4016 | C0CBCAC00275 | IC | 1 | |
| IC4018 | C0CBCAC00275 | IC | 1 | |
| IC4019 | C1AB00002456 | IC | 1 | |
| IC4022 | TVRN856S | IC | 1 | PAVCA |
| IC4023 | TVRN857S | IC | 1 | PAVCA |
| IC4025 | C0FBBK000038 | IC | 1 | |
| IC4026 | C1AB00002535 | IC | 1 | |
| IC4027 | C0DBFFD00003 | IC | 1 | |
| IC4028 | C0ABBB000230 | IC | 1 | |
| IC4029 | C0CBCAC00282 | IC | 1 | |
| IC4030 | C0CBCBC00190 | IC | 1 | |
| IC4032 | C0DBGYY00052 | IC | 1 | |
| IC4035 | C0CBCAF00031 | IC | 1 | |
| IC4036 | C0JBAP000020 | IC | 1 | |
| IC4037 | MN84522-A | IC | 1 | |
| IC4038 | C3ABQJ000048 | IC | 1 | |
| IC5601 | N0BG2DE00001 | IC | 1 | |
| IC5602 | EHMDD9851 | LINEAR IC | 1 | |
| IC5604 | C0DBZGC00067 | IC | 1 | |
| IC5801 | C0DBAZF00003 | IC | 1 | |
| IC6131 | C0ZBZ0000895 | IC | 1 | |
| IC6151 | C0ZBZ0001324 | IC | 1 | |
| IC6191 | C0ZBZ0000895 | IC | 1 | |
| IC6211 | C0ZBZ0001325 | IC | 1 | |
| IC6221 | C0DBEMB00005 | IC | 1 | |
| IC6241 | C0JBAZ000005 | IC | 1 | |
| IC6251 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6471 | C0DBEKA00003 | IC | 1 | |
| IC6472 | C0JBAA000377 | IC | 1 | |
| IC6501 | C0ZBZ0000895 | IC | 1 | |
| IC6521 | C0ZBZ0001324 | IC | 1 | |
| IC6561,62 | C0JBAZ000005 | IC | 2 | |
| IC6581 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6601 | C0ZBZ0001325 | IC | 1 | |
| IC6602 | C0JBAB000715 | IC | 1 | |
| IC6610 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6671 | C0ZBZ0001325 | IC | 1 | |
| IC6681 | C0ZBZ0001325 | IC | 1 | |
| IC6682 | C0JBAA000377 | IC | 1 | |
| IC6721,22 | C0JBAZ000994 | IC | 2 | |
| IC6724,25 | C0CBADC00089 | IC | 2 | |
| IC6751 | C0CBADC00089 | IC | 1 | |
| IC6752 | C0ZBZ0001325 | IC | 1 | |
| IC6753 | C0JBAB000715 | IC | 1 | |
| IC6771 | C0CBADC00089 | IC | 1 | |
| IC6772 | C0ZBZ0001325 | IC | 1 | |
| IC6773,74 | C0JBAA000377 | IC | 2 | |
| IC6791 | N0BF1FB00001 | IC | 1 | |
| IC6801,02 | C0DBEMB00005 | IC | 2 | |
| IC6803 | C0DAAMH00005 | IC | 1 | |
| IC6821 | C0DBEMB00005 | IC | 1 | |
| IC6841 | C0DBEMB00005 | IC | 1 | |
| IC6861 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6871 | NJM2903M | INTEGRATED CIRCUIT | 1 | |
| IC6901-06 | AN16071A-VT | IC | 6 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| IC6951-56 | AN16071A-VT | IC | 6 | |
| IC7101 | C0JBAZ001120 | IC | 1 | |
| IC7201-09 | C0JBAZ001120 | IC | 9 | |
| IC7301-05 | C0JBAZ001120 | IC | 5 | |
| IC7401-05 | C0JBAZ001120 | IC | 5 | |
| IC7501-09 | C0JBAZ001120 | IC | 9 | |
| IC7601 | C0JBAZ001120 | IC | 1 | |
| IC9001 | TVRN811-1 | IC | 1 | |
| IC9002 | C0ZBZ0001330 | IC | 1 | |
| IC9003 | TVRN805-1 | IC | 1 | |
| IC9007 | TVRN814 | IC | 1 | |
| IC9011 | C0EBF0000431 | IC | 1 | |
| IC9200 | C1ZBZ0003186 | IC | 1 | |
| IC9300 | MN84521-A | IC | 1 | |
| IC9301 | C3ABQJ000051 | IC | 1 | |
| IC9304 | TVRN825 | IC | 1 | |
| IC9400 | MN84521-A | IC | 1 | |
| IC9401 | C3ABQJ000051 | IC | 1 | |
| IC9402 | C0JBAZ002614 | IC | 1 | |
| IC9500 | C1ZBZ0002599 | IC | 1 | |
| IC9503-05 | C0JBAZ001120 | IC | 3 | |
| IC9602 | PST9128NR | IC (LOGIC) | 1 | |
| IC9800 | C0DBAYY00054 | IC | 1 | |
| IC9801 | C0DBZFG00066 | IC | 1 | |
| IC9802, 03 | C0JBAZ001120 | IC | 2 | |
| IC9806 | C0DBAHD00011 | IC | 1 | |
| IC9807 | C0DBAYY00054 | IC | 1 | |
| IC9809 | C0DBAYY00054 | IC | 1 | |
| | | | | |
| JK2601 | K1U939A00003 | TERMINAL BOARD | 1 | PAVCA |
| JK2603 | K2HA204A0041 | JACK | 1 | |
| | | | | |
| JS1100-02 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |
| JS2300-03 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 4 | |
| JS2319 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| JS2331 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| JS2606, 07 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| JS2614-17 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 4 | |
| JS2619 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| JS2629, 30 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| JS2632-34 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| JS2640-42 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| JS2645-47 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| JS2650, 51 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| JS2654 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| JS2661-63 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 3 | |
| JS2714-25 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 12 | |
| JS4016, 17 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| JS4022-24 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |
| JS4027, 28 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| JS4033-40 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 8 | |
| JS4104 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| JS4111 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| JS4115 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| JS4118 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| JS5600 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| | | | | |
| K1 | K1KY12B00001 | 12P CONNECTOR | 1 | |
| K2 | K1KA02BA0061 | 2P CONNECTOR | 1 | |
| K101 | DG12D1-0 | RELAY | 1 | ⚠ |
| K102 | DLS12D1-0 | RELAY | 1 | ⚠ |
| | | | | |
| L101,02 | P3180207Z | CHOKE COIL | 2 | ⚠ |
| L103 | ETB44CZ129AD | TRANS | 1 | |
| L104 | EXCELSR35T | BEAD CHOKE | 1 | |
| L106 | EXCELSR35T | BEAD CHOKE | 1 | |
| L108 | EXCELSR35T | BEAD CHOKE | 1 | |
| L352,53 | EXCELDR35C | BEAD CHOKE | 2 | |
| L501 | EXCELSA35 | BEAD CHOKE | 1 | |
| L502 | EXCELDR35C | BEAD CHOKE | 1 | |
| L1101-04 | J0JHC0000078 | CHIP INDUCTOR | 4 | |
| L1107 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L1109 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2300-03 | G0C330MA0049 | PEAKING COIL | 4 | |
| L2308 | TALL08N3R9MA | INDUCTION COIL | 1 | |
| L2616 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2625 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L2632 | G0A2R7ZA0021 | CHOKE COIL | 1 | |
| L2633 | G1C100MA0072 | INDUCTION COIL | 1 | |
| L2634 | G1C470MA0077 | INDUCTION COIL | 1 | |
| L2636 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4023 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4029 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4031 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4038 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4040-46 | J0JHC0000078 | CHIP INDUCTOR | 7 | |
| L4048 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4049 | J0JBC0000080 | CHIP INDUCTOR | 1 | |
| L4050,51 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4052 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L4053-55 | J0JHC0000078 | CHIP INDUCTOR | 3 | |
| L4056,57 | J0JCC0000077 | CHIP INDUCTOR | 2 | |
| L4060,61 | J0JCC0000077 | CHIP INDUCTOR | 2 | |
| L4065,66 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4068-70 | J0JHC0000078 | CHIP INDUCTOR | 3 | |
| L4071 | J0JBC0000080 | CHIP INDUCTOR | 1 | |
| L4073 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L4075,76 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L4077 | J0JCC0000077 | CHIP INDUCTOR | 1 | |
| L4078 | J0JHC0000078 | CHIP INDUCTOR | 1 | |
| L5602 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5604 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5606,07 | G0A220GA0002 | CHOKE COIL | 2 | |
| L5609 | G0A220GA0002 | CHOKE COIL | 1 | |
| L5612 | TALL08N2R7MA | INDUCTION COIL | 1 | |
| L5615 | TALL08N150KA | INDUCTION COIL | 1 | |
| L5621 | G1C330MA0234 | INDUCTION COIL | 1 | |
| L5622,23 | G1C150MA0234 | INDUCTION COIL | 2 | |
| L5624 | G1C330MA0234 | INDUCTION COIL | 1 | |
| L5651 | G0A220GA0002 | CHOKE COIL | 1 | |
| L5801 | G0C101K00023 | PEAKING COIL | 1 | |
| L5802 | TALL08N101KA | INDUCTION COIL | 1 | |
| L6002-04 | G0CR82KA0147 | CHOKE COIL | 3 | |
| L6011-14 | G0A1R4MA0003 | CHOKE COIL | 4 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| L6061-68 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6081-88 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6101,02 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6103 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6104,05 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6211,12 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6221 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6241 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6262 | G0ZZ00002183 | PEAKING COIL | 1 | |
| L6271,72 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6398,99 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6401,02 | G0CR82KA0147 | CHOKE COIL | 2 | |
| L6404 | G0CR82KA0147 | CHOKE COIL | 1 | |
| L6411-14 | G0A1R4MA0003 | CHOKE COIL | 4 | |
| L6461-68 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6472,73 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6481-88 | G0ZZ00002183 | PEAKING COIL | 8 | |
| L6591,92 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6601,02 | G0ZZ00002183 | PEAKING COIL | 2 | |
| L6801,02 | J0JJC0000011 | CHIP INDUCTOR | 2 | |
| L6841 | J0JJC0000011 | CHIP INDUCTOR | 1 | |
| L9501,02 | J0JHC0000078 | CHIP INDUCTOR | 2 | |
| L9503 | G1C150KA0038 | INDUCTION COIL | 1 | |
| L9800 | G1C3R0MA0248 | INDUCTION COIL | 1 | |
| L9801,02 | G1C2R2MA0241 | INDUCTION COIL | 2 | |
| L9810 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| | | | | |
| MC101 | MP00P7 | MODULE | 1 | ⚠ |
| MC201 | MLZNC101 | MODULE | 1 | ⚠ |
| MC202 | MP00R1 | MODULE | 1 | ⚠ |
| MC301 | MLZNC221 | MODULE | 1 | ⚠ |
| MC502 | MLWNB103 | MODULE | 1 | ⚠ |
| MC601 | MLSZA100 | MODULE | 1 | ⚠ |
| MC701 | MLZDC103 | MODULE | 1 | ⚠ |
| | | | | |
| P2 | B2P3-VH-B | CONNECTOR | 1 | |
| P5 | B11B-PH-KS | CONNECTOR | 1 | |
| P9 | B3P4VH-B-L | CONNECTOR | 1 | ⚠ |
| P10 | B6B-PH-KS | CONNECTOR | 1 | |
| P11 | B2P3-VH-B | CONNECTOR | 1 | |
| P12 | B10B-PH-KS | CONNECTOR | 1 | |
| P23 | B3B-PH-KS | CONNECTOR | 1 | |
| P25 | B20B-PHDSS | CONNECTOR | 1 | |
| | | | | |
| PA2 | K1KA05AA0192 | 5P CONNECTOR | 1 | |
| PA5 | K1KA11AA0194 | 11P CONNECTOR | 1 | |
| PA10 | K1KA06A00452 | 6P CONNECTOR | 1 | |
| PA20 | K1MN40A00024 | 40P CONNECTOR | 1 | |
| PA31-34 | K1KA03AA0192 | 3P CONNECTOR | 4 | |
| PA40 | K1KA20AA0009 | 20P CONNECTOR | 1 | |
| PA1101 | K5H8012A0023 | FUSE | 1 | |
| PA9800 | K5H4022A0023 | FUSE | 1 | |
| | | | | |
| PC503 | PS2581A | PHOTO CAPLER | 1 | ⚠ |
| PC505,06 | PS2581A | PHOTO CAPLER | 2 | ⚠ |
| PC6480 | B3PBA0000223 | IC | 1 | |
| PC6701-03 | B3PBA0000233 | IC | 3 | |
| PC6704 | B3PBA0000234 | IC | 1 | |
| PC6705 | B3PBA0000233 | IC | 1 | |
| PC6760 | B3PBA0000223 | IC | 1 | |
| PC6801 | B3PBA0000223 | IC | 1 | |
| PC6861 | B3PBA0000223 | IC | 1 | |
| PC6871 | B3PBA0000223 | IC | 1 | |
| | | | | |
| Q103 | 2SD2185 | TRANSISTOR | 1 | |
| Q104 | 2SB1440 | TRANSISTOR | 1 | |
| Q106 | 2SD1819A | TRANSISTOR | 1 | |
| Q301,02 | 2SK3568 | FET | 2 | ⚠ |
| Q351,52 | 2SK3813 | FET | 2 | |
| Q353,54 | 2SB1218A | TRANSISTOR | 2 | |
| Q401 | 2SA1699 | TRANSISTOR | 1 | |
| Q402 | 2SK3302 | FET | 1 | |
| Q403 | 2SD601A | TRANSISTOR | 1 | |
| Q404,05 | 2SK2391 | FET | 2 | |
| Q406 | 2SD601A | TRANSISTOR | 1 | |
| Q501 | 2SK3302 | FET | 1 | |
| Q502 | 2SK2731T | FET | 1 | |
| Q551,52 | HAT1130R | FET | 2 | |
| Q553 | 2SB710A | TRANSISTOR | 1 | |
| Q1100-03 | B1ABDF000034 | TRANSISTOR | 4 | |
| Q1106-08 | B1ABDF000034 | TRANSISTOR | 3 | |
| Q1109,10 | B1CBHD000002 | FET | 2 | |
| Q1111 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1114 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1116 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1125 | 2SA207700L | TRANSISTOR | 1 | |
| Q1130 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1134 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1137 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q1139-43 | B1ABDF000034 | TRANSISTOR | 5 | |
| Q2300 | 2SA207700L | TRANSISTOR | 1 | |
| Q2301-03 | 2SD601A | TRANSISTOR | 3 | |
| Q2306,07 | 2SA207700L | TRANSISTOR | 2 | |
| Q2510,11 | 2SD601A | TRANSISTOR | 2 | |
| Q2519 | 2SB709A | TRANSISTOR | 1 | |
| Q2607 | 2SC584500L | TRANSISTOR | 1 | |
| Q2608,09 | 2SD601A | TRANSISTOR | 2 | |
| Q2611 | 2SD601A | TRANSISTOR | 1 | |
| Q2612 | 2SB709A | TRANSISTOR | 1 | |
| Q2613 | 2SC584500L | TRANSISTOR | 1 | |
| Q2615 | 2SC584500L | TRANSISTOR | 1 | |
| Q2617 | 2SC584500L | TRANSISTOR | 1 | |
| Q2618,19 | 2SD601A | TRANSISTOR | 2 | |
| Q2624 | 2SC584500L | TRANSISTOR | 1 | |
| Q2625 | 2SK3065T100 | FET | 1 | |
| Q2626 | 2SA207700L | TRANSISTOR | 1 | |
| Q4050 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q4056-59 | 2SA207700L | TRANSISTOR | 4 | |
| Q4065-69 | B1ABDF000034 | TRANSISTOR | 5 | |
| Q4070,71 | B1MBACA00008 | TRANSISTOR | 2 | |
| Q4082,83 | 2SK137400L | TRANSISTOR | 2 | |
| Q4084 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q4919 | B1ABDF000034 | TRANSISTOR | 1 | |
| Q4920 | 2SA207700L | TRANSISTOR | 1 | |
| Q5601 | B1DHDC000028 | TRANSISTOR | 1 | |
| Q5602 | 2SD601A | TRANSISTOR | 1 | |
| Q5603 | B1DHDC000028 | TRANSISTOR | 1 | |
| Q5604,05 | 2SD601A | TRANSISTOR | 2 | |
| Q5610 | 2SD601A | TRANSISTOR | 1 | |
| Q5613 | 2SD601A | TRANSISTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| Q5641-43 | 2SA207700L | TRANSISTOR | 3 | |
| Q5644 | 2SD601A | TRANSISTOR | 1 | |
| Q6001-03 | B1JADN000001 | TRANSISTOR | 3 | |
| Q6021-23 | B1JADN000001 | TRANSISTOR | 3 | |
| Q6041-43 | B1JADN000002 | TRANSISTOR | 3 | |
| Q6052,53 | B1JADN000002 | TRANSISTOR | 2 | |
| Q6101,02 | B1DFKM000002 | TRANSISTOR | 2 | |
| Q6103 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6104 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6105,06 | B1DFKM000002 | TRANSISTOR | 2 | |
| Q6111 | 2SK326800L | FET | 1 | |
| Q6112 | B1DFKM000002 | TRANSISTOR | 1 | |
| Q6114 | B1DFKM000002 | TRANSISTOR | 1 | |
| Q6141 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6142 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6146 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6147 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6171 | 2SD2185 | TRANSISTOR | 1 | |
| Q6172 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6181 | 2SD2185 | TRANSISTOR | 1 | |
| Q6182 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6221 | 2SD1263A | TRANSISTOR | 1 | |
| Q6222 | 2SC3063 | TRANSISTOR | 1 | |
| Q6251 | 2SD601A | TRANSISTOR | 1 | |
| Q6401-03 | B1JADN000001 | TRANSISTOR | 3 | |
| Q6421-23 | B1JAEP000001 | TRANSISTOR | 3 | |
| Q6441-43 | B1JADN000002 | TRANSISTOR | 3 | |
| Q6452,53 | B1JADP000002 | TRANSISTOR | 2 | |
| Q6471 | B1CHGD000006 | TRANSISTOR | 1 | |
| Q6511 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6512 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6516 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6517 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6531 | 2SD2185 | TRANSISTOR | 1 | |
| Q6532 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6551 | 2SD2185 | TRANSISTOR | 1 | |
| Q6552 | B1ADRD000001 | TRANSISTOR | 1 | |
| Q6581 | 2SD601A | TRANSISTOR | 1 | |
| Q6601 | B1DEDS000001 | TRANSISTOR | 1 | |
| Q6602 | 2SD601A | TRANSISTOR | 1 | |
| Q6621,22 | B1DFKM000001 | TRANSISTOR | 2 | |
| Q6641-45 | B1DFKM000001 | TRANSISTOR | 5 | |
| Q6647,48 | B1DFKM000001 | TRANSISTOR | 2 | |
| Q6661 | B1DEET000002 | TRANSISTOR | 1 | |
| Q6662 | 2SD601A | TRANSISTOR | 1 | |
| Q6663 | 2SD2185 | TRANSISTOR | 1 | |
| Q6671-73 | B1DEDS000001 | TRANSISTOR | 3 | |
| Q6680 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6681,82 | 2SK389500L | FET | 2 | |
| Q6691 | 2SK620 | FET | 1 | |
| Q6742,43 | 2SD601A | TRANSISTOR | 2 | |
| Q6744 | 2SK620 | FET | 1 | |
| Q6762 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6781 | B1ABNF000006 | TRANSISTOR | 1 | |
| Q6782 | B1ADNF000006 | TRANSISTOR | 1 | |
| Q6791 | 2SD601A | TRANSISTOR | 1 | |
| Q6803 | 2SD814A | TRANSISTOR | 1 | |
| Q6821 | 2SD1263A | TRANSISTOR | 1 | |
| Q6822 | 2SC3063 | TRANSISTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| Q6824 | 2SD601A | TRANSISTOR | 1 | |
| Q6841 | 2SD1263A | TRANSISTOR | 1 | |
| Q6842 | 2SC1473A | TRANSISTOR | 1 | |
| Q9044 | 2SD601A | TRANSISTOR | 1 | |
| Q9046 | 2SD601A | TRANSISTOR | 1 | |
| Q9049 | 2SB709A | TRANSISTOR | 1 | |
| Q9050-54 | 2SD601A | TRANSISTOR | 5 | |
| Q9057,58 | B1CBHD000002 | FET | 2 | |
| Q9100 | 2SD601A | TRANSISTOR | 1 | |
| Q9200,01 | B1CBHD000002 | FET | 2 | |
| Q9301,02 | 2SD601A | TRANSISTOR | 2 | |
| Q9400-02 | 2SD601A | TRANSISTOR | 3 | |
| Q9800,01 | B1MBEDA00015 | TRANSISTOR | 2 | |
| Q9803 | B1MBEDA00015 | TRANSISTOR | 1 | |
| Q9805,06 | 2SD601A | TRANSISTOR | 2 | |
| | | | | |
| R101 | ERC12UGK185 | S 1.8MOHM, K,1/2W | 1 | |
| R103 | R5B100J | W 10 OHM, J, 5W | 1 | |
| R104-06 | ERJ6ENF1213 | M 121KOHM, 1/10W | 3 | |
| R107 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R108 | ERJ6ENF1213 | M 121KOHM, 1/10W | 1 | |
| R109-11 | RF5EJR18B | F 0.18OHM, J, 5W | 3 | |
| R113 | ERJ6ENF3302 | M 33KOHM, 1/10W | 1 | |
| R114 | ERJ6ENF2701 | M 2.7KOHM, 1/10W | 1 | |
| R115 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R116 | ERJ12YJ470 | M 47 OHM, J,1/2W | 1 | |
| R117 | ERJ12YJ330 | M 33 OHM,J, 1/2W | 1 | |
| R118 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R119 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R120 | ERJ12YJ470 | M 47 OHM, J,1/2W | 1 | |
| R122 | ERJ6GEYJ154 | M 150KOHM,J,1/10W | 1 | |
| R123 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R125 | ERJ12YJ470 | M 47 OHM, J,1/2W | 1 | |
| R127-29 | ERJ6GEYJ183 | M 18KOHM,J,1/10W | 3 | |
| R130 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R131 | ER0S2CKF4993 | M 499KOHM, F,1/4W | 1 | |
| R132,33 | ERJ6ENF2493 | M 249KOHM, 1/10W | 2 | |
| R134 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R135 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R136 | ERJ6ENF3162 | M31.6KOHM, 1/10W | 1 | |
| R137 | ERJ6GEYJ123 | M 12KOHM,J,1/10W | 1 | |
| R138 | ERJ6GEYJ474 | M 470KOHM,J,1/10W | 1 | |
| R139 | ERJ6ENF3302 | M 33KOHM, 1/10W | 1 | |
| R140-42 | ERJ6ENF5493 | M 549KOHM, 1/10W | 3 | |
| R143 | ERJ6ENF6041 | M6.04KOHM, 1/10W | 1 | |
| R144 | ERJ6ENF6191 | M6.19KOHM, 1/10W | 1 | |
| R145 | ERJ6GEYJ204 | M 200KOHM,J,1/10W | 1 | |
| R146 | ERJ6GEYJ684 | M 680KOHM,J,1/10W | 1 | |
| R147 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 1 | |
| R149 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 1 | |
| R150,51 | ERJ6ENF2493 | M 249KOHM, 1/10W | 2 | |
| R201,02 | ERJ12YJ221U | M 220 OHM,J, 1/2W | 2 | |
| R203,04 | ERJ12YJ220 | M 22 OHM,J, 1/2W | 2 | |
| R205-07 | ERJ12YJ683 | M 68KOHM, 1/2W | 3 | |
| R208,09 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R210 | ERX12SJ1R0 | M 0.1 OHM, J,1/2W | 1 | |
| R251,52 | ERG2SJ183H | M 18KOHM, J, 2W | 2 | |
| R253-55 | ERJ6GEYJ114 | M 110KOHM,J,1/10W | 3 | |
| R256,57 | ERJ6GEYJ682 | M 6.8KOHM,J,1/10W | 2 | |
| R258-61 | ERJ6ENF6192 | M61.9KOHM, 1/10W | 4 | |
| R262 | ERJ6GEYJ220 | M 22 OHM,J,1/10W | 1 | |
| R301,02 | ERJ12YJ101 | M 100 OHM,J, 1/2W | 2 | |
| R303,04 | ERJ12YJ220 | M 22 OHM,J, 1/2W | 2 | |
| R305-07 | ERJ12YJ683 | M 68KOHM,J, 1/2W | 3 | |
| R308,09 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R310 | ERX12SJ1R0 | M 0.1 OHM, J,1/2W | 1 | |
| R351 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R353 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R354 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R356,57 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R358 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R359,60 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 2 | |
| R361 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R362 | ERDS2TJ101 | C 100 OHM, J,1/4W | 1 | |
| R363 | ERJ6GEYJ332 | M 3.3KOHM,J,1/10W | 1 | |
| R364 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R365-67 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 3 | |
| R368 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R369,70 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 2 | |
| R371 | ERJ6ENF1622 | M16.2KOHM, 1/10W | 1 | |
| R372 | ERJ6GEYJ1R0 | M 1 OHM,J,1/10W | 1 | |
| R373 | ERDS2TJ471 | C 470 OHM, J,1/4W | 1 | |
| R401 | ERJ12YJ100 | M 10 OHM,J, 1/2W | 1 | |
| R402,03 | ERJ12YJ104U | M 100KOHM, 1/2W | 2 | |
| R404 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R405,06 | ERJ6GEYJ184 | M 180KOHM,J,1/10W | 2 | |
| R407 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R408 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R409 | ERG2SJ682 | M 6.8KOHM, J, 2W | 1 | |
| R410 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R412 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R413 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R414-17 | ERJ6GEYJ123 | M 12KOHM,J,1/10W | 4 | |
| R418 | ERJ6GEYJ332 | M 3.3KOHM,J,1/10W | 1 | |
| R420 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R421 | ERJ6ENF4751 | M4.75KOHM, 1/10W | 1 | |
| R422 | ERJ6ENF1581 | M1.58KOHM, 1/10W | 1 | |
| R423,24 | ERJ6ENF7152 | M71.5KOHM, 1/10W | 2 | |
| R425 | ERJ6ENF3002 | M 30KOHM, 1/10W | 1 | |
| R426 | RF2EJR47B | W0.47 OHM, J, 2W | 1 | |
| R428 | ERJ6ENF6342 | M6.34KOHM, 1/10W | 1 | |
| R429 | ERJ6ENF5362 | M5.36KOHM, 1/10W | 1 | |
| R430 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R474 | ERJ6ENF1052 | M10.5KOHM, 1/10W | 1 | |
| R477-80 | ERJ6ENF1052 | M10.5KOHM, 1/10W | 4 | |
| R501 | ERJ12YJ474 | M 470KOHM, 1/2W | 1 | |
| R503 | ERJ12YJ474 | M 470KOHM, 1/2W | 1 | |
| R505 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 1 | |
| R507,08 | ERJ6GEYJ334 | M 330KOHM,J,1/10W | 2 | |
| R509-12 | ERJ6ENF8253 | M 825KOHM, 1/10W | 4 | |
| R514,15 | ERJ6ENF8253 | M 825KOHM, 1/10W | 2 | |
| R518 | ERJ12YJ100 | M 10 OHM,J, 1/2W | 1 | |
| R519 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R528,29 | ERJ6ENF2703 | M 270KOHM, 1/10W | 2 | |
| R530 | ER0S2TKF5363 | M 536KOHM, F,1/4W | 1 | |
| R531 | ERJ6GEYJ4R7 | M 4.7 OHM,J,1/10W | 1 | |
| R560 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R561 | ERDS2TJ332 | C 3.3KOHM, J,1/4W | 1 | |
| R563 | ERJ6GEYJ332 | M 3.3KOHM,J,1/10W | 1 | |
| R564 | ERJ6GEYJ391 | M 390 OHM,J,1/10W | 1 | |
| R565 | ERJ6GEYJ473 | M 47KOHM,J,1/10W | 1 | |
| R566 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R567 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R568 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R569,70 | ERJ12YJ151 | M 150 OHM,J, 1/2W | 2 | |
| R571 | ERJ6GEYJ332 | M 3.3KOHM,J,1/10W | 1 | |
| R572,73 | ERJ6ENF2703 | M 270KOHM, 1/10W | 2 | |
| R574 | ER0S2TKF5363 | M 536KOHM, F,1/4W | 1 | |
| R580 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R1101 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1102,03 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 2 | |
| R1105 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1113 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R1116 | ERJ2GEJ562 | M 5.6KOHM,J,0.063W | 1 | |
| R1117 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1121,22 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R1123 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R1124,25 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 2 | |
| R1129,30 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R1131,32 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1133,34 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 2 | |
| R1135 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1137 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1145 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1147,48 | D1HG5608A002 | NETWORK RESISTER | 2 | |
| R1150 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1153 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1154,55 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R1156 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1157 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1158 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R1159 | ERJ2GEJ123X | M 12KOHM ,J,0.063W | 1 | |
| R1161 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1164 | ERJ2GEJ123X | M 12KOHM ,J,0.063W | 1 | |
| R1165 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R1166,67 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1168 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1171 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1174 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1175 | ERJ2GEJ563 | M 56KOHM ,J,0.063W | 1 | |
| R1176 | ERJ2GEJ123X | M 12KOHM ,J,0.063W | 1 | |
| R1177 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1181 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1182 | ERJ2GEJ683 | M 68KOHM, J,0.063W | 1 | |
| R1183 | EXB28V680JX | RESISTOR ARRAY | 1 | |
| R1184 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1187 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R1188 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1189,90 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R1197-99 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 3 | |
| R1200 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R1203 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1206 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1207 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1214 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1215-17 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 3 | |
| R1218 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1220 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1221 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R1222 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R1223 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1224 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1225,26 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1228 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R1229 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1230 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R1231 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R1232,33 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 2 | |
| R1234 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1235,36 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 2 | |
| R1238 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1239 | ERJ3EKF1202 | M 12KOHM, 1/16W | 1 | |
| R1241 | ERJ2GEJ822 | M 8.2KOHM, J,0.063W | 1 | |
| R1246 | ERJ2GEJ912 | M 9.1KOHM, J,0.063W | 1 | |
| R1249 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1250 | ERJ2GEJ224 | M 220KOHM, J,0.063W | 1 | |
| R1251,52 | EXB2HV101J | RESISTOR ARRAY | 2 | |
| R1256 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1259 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1263,64 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1268,69 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R1270,71 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1275 | ERJ3EKF7151 | M7.15KOHM, 1/16W | 1 | |
| R1279,80 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R1281 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1282 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1283 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1290 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R1292,93 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 2 | |
| R1296,97 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R1303-06 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R1307 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1308 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R1309-12 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R1313,14 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 2 | |
| R1315 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1316 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1318,19 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 2 | |
| R1321 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R1322 | ERJ2GEJ100 | M 10 OHM, J,0.063W | 1 | |
| R1324 | ERJ2GEJ823 | M 82KOHM, J,0.063W | 1 | |
| R1326 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1328 | ERJ2GEJ683 | M 68KOHM, J,0.063W | 1 | |
| R1330 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1332 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1333 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1338 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1339 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1342 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1343 | ERJ2GEJ561 | M 60 OHM, J,0.063W | 1 | |
| R1346 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1351 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1352 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1354 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1356,57 | ERJ2GEJ100 | M 10 OHM, J,0.063W | 2 | |
| R1363 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1367 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R1368 | ERJ2GEJ183 | M 18KOHM ,J,0.063W | 1 | |
| R1372 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1375 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1376 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R1377 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 1 | |
| R1384 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1386 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R1387 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1388 | ERJ2GEJ563 | M 56KOHM ,J,0.063W | 1 | |
| R1390 | ERJ2GEJ563 | M 56KOHM ,J,0.063W | 1 | |
| R1400 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1405,06 | ERJ2GEJ474 | M 470KOHM, J,0.063W | 2 | |
| R1408 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1409 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1410 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1411 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1412,13 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 2 | |
| R1426-33 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 8 | |
| R1434 | ERJ2GEJ471 | M 470 OHM, J,0.063W | 1 | |
| R1436 | ERJ2GEJ561 | M 60 OHM, J,0.063W | 1 | |
| R1438 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1440 | ERJ2GEJ241 | M 240 OHM, J,0.063W | 1 | |
| R1446 | ERJ2GEJ471 | M 470 OHM, J,0.063W | 1 | |
| R1449 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1453 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1454 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1458,59 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R1464 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1466 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R1467 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1470 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R1472 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R1474 | ERJ8GEY0R00 | M 0 OHM, 1/8W | 1 | |
| R1478 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R1479 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1524 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1526 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R1527 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R1528 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R1530 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R2310,11 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R2312 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2323,24 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R2325 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2329 | ERJ3EKF1003 | M 100KOHM, 1/16W | 1 | |
| R2332 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2341 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2349 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2357 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2359 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R2360 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2361 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2363 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2364 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |
| R2365 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2366 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2368 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2369 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R2372,73 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R2375 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2376 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2383 | ERJ3EKF3301 | M 3.3KOHM, 1/16W | 1 | |
| R2384 | ERJ3EKF1151 | M1.15KOHM, 1/16W | 1 | |
| R2387 | ERJ3EKF1151 | M1.15KOHM, 1/16W | 1 | |
| R2388 | ERJ3EKF3301 | M 3.3KOHM, 1/16W | 1 | |
| R2397,98 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R2401,02 | ERJ3GEYJ331 | M 330 OHM,J,1/16W | 2 | |
| R2403 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2404,05 | ERJ3GEYJ331 | M 330 OHM,J,1/16W | 2 | |
| R2406 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2407 | ERJ3EKF1241 | M1.24KOHM, 1/16W | 1 | |
| R2408 | ERJ3EKF1181 | M1.18KOHM, 1/16W | 1 | |
| R2409 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R2410 | ERJ3EKF7870 | M 787 OHM, 1/16W | 1 | |
| R2421 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R2422 | ERJ3EKF7870 | M 787 OHM, 1/16W | 1 | |
| R2516 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R2517 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R2520 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 1 | |
| R2524 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R2525 | ERJ6ENF1002 | M 10KOHM, 1/10W | 1 | |
| R2526 | ERJ6GEYJ562 | M 5.6KOHM,J,1/10W | 1 | |
| R2542 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R2545 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R2550 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R2553 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R2557 | ERJ6ENF5490 | M 549 OHM, 1/10W | 1 | |
| R2559,60 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R2603 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R2604 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2605 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R2606 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2607 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2608 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R2609 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2610 | ERJ3GEYJ184 | M 180KOHM,J,1/16W | 1 | |
| R2611,12 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 2 | |
| R2625 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2640,41 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R2642 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2643 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2644 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R2650 | ERJ3EKF2701 | M 2.7KOHM, 1/16W | 1 | |
| R2651 | ERJ3EKF1201 | M 1.2KOHM, 1/16W | 1 | |
| R2654 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2655 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2656 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2657 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2658 | ERJ3GEYJ123 | M 12KOHM,J,1/16W | 1 | |
| R2659 | ERJ3GEYJ823 | M 82KOHM,J,1/16W | 1 | |
| R2660 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2671 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R2672 | ERJ3GEYJ123 | M 12KOHM,J,1/16W | 1 | |
| R2673 | ERJ3GEYJ823 | M 82KOHM,J,1/16W | 1 | |
| R2674 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R2676 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2677 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2678 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R2679 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2680,81 | ERJ3GEYJ184 | M 180KOHM,J,1/16W | 2 | |
| R2682 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2684 | ERJ3GEYJ203 | M 20KOHM,J,1/16W | 1 | |
| R2685 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2686 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2687 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R2690 | ERJ3GEYJ182 | M 1.8KOHM,J,1/16W | 1 | |
| R2692 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R2693 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2694 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2695 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2696 | ERJ3GEYJ105 | M 1MOHM,J,1/16W | 1 | |
| R2697 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R2698 | ERJ3GEYJ182 | M 1.8KOHM,J,1/16W | 1 | |
| R2700 | ERJ3GEYJ274 | M 270KOHM,J,1/16W | 1 | |
| R2701-03 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 3 | |
| R2704 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R2708 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2718 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2719 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R2724 | ERJ14YJ821 | M 820 OHM,J,1/16W | 1 | |
| R2726,27 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2728 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2733,34 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2735 | ERJ3GEYJ183 | M 18KOHM,J,1/16W | 1 | |
| R2736 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2737 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2738 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2741 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2744 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R2747,48 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 2 | |
| R2749 | ERJ3EKF2701 | M 2.7KOHM, 1/16W | 1 | |
| R2750 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2751 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2753 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2754 | ERJ3EKF1201 | M 1.2KOHM, 1/16W | 1 | |
| R2755 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2756 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2757 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R2758 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2759 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2760,61 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2762,63 | ERJ3EKF1300V | M 130 OHM, 1/16W | 2 | |
| R2764 | ERJ3EKF1000 | M 100 OHM, 1/16W | 1 | |
| R2767 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2769,70 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2771 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R2772 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2773 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R2775 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2776 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R2777-79 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 3 | |
| R2781 | ERJ3GEYJ821 | M 820 OHM,J,1/16W | 1 | |
| R2783 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R2785 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R2786 | ERJ3EKF8202 | M 82KOHM, 1/16W | 1 | |
| R2787 | ERJ3EKF1622V | M16.2KOHM, 1/16W | 1 | PAVCA |
| R2790 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R2791 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R2792 | ERJ3GEYJ682 | M 6.8KOHM,J,1/16W | 1 | |
| R2793-95 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 3 | |
| R2797-00 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 4 | |
| R2801,02 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |
| R2803 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R2804 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2807,08 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2818 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R2821-25 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 5 | |
| R2830 | ERJ3GEYJ823 | M 82KOHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R2832,33 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 2 | |
| R2834 | ERJ3EKF6342 | M6.34KOHM, 1/16W | 1 | |
| R2835 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2837 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R2838 | ERJ3EKF6342 | M6.34KOHM, 1/16W | 1 | |
| R2839 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2840 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R2842 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R2843 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R2848-51 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 4 | |
| R2854 | ERJ3GEYJ393 | M 39KOHM,J,1/16W | 1 | |
| R2855 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 1 | |
| R2856 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2858 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2859 | ERJ3GEYJ393 | M 39KOHM,J,1/16W | 1 | |
| R2860,61 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 2 | |
| R2862 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2864 | ERJ6GEYJ393 | M 39KOHM,J,1/10W | 1 | |
| R2865 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 1 | |
| R2868,69 | ERJ6ENF75R0 | M 75 OHM, 1/10W | 2 | |
| R2894 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R3751 | ERJ6ENF1741 | M1.74KOHM, 1/10W | 1 | |
| R3753 | ERJ6ENF2321 | M2.32KOHM, 1/10W | 1 | |
| R3755 | ERJ6ENF1621 | M1.62KOHM, 1/10W | 1 | |
| R3756 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R3758 | ERJ6ENF3161 | M3.16KOHM, 1/10W | 1 | |
| R4001 | ERJ3EKF1211 | M1.21KOHM, 1/16W | 1 | |
| R4004 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4008 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4010 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4017 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R4021 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4024,25 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4026,27 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 2 | |
| R4031-33 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R4037-39 | D1HG1038A002 | NETWORK RESISTER | 3 | |
| R4040,41 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4042,43 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4044 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4045,46 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R4047 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4101 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4257 | ERJ3EKF3302 | M 33KOHM, 1/16W | 1 | |
| R4265 | ERJ3EKF3242 | M32.4KOHM, 1/16W | 1 | |
| R4269 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4271,72 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4286,87 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4293 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4338-43 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 6 | |
| R4465 | ERJ2GEJ224 | M 220KOHM, J,0.063W | 1 | |
| R4469 | ERJ3EKF1500 | M 150 OHM, 1/16W | 1 | |
| R4474 | ERJ3EKF1211 | M1.21KOHM, 1/16W | 1 | |
| R4480 | ERJ3EKF4220 | M 422 OHM, 1/10W | 1 | |
| R4481 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R4482,83 | ERJ3EKF1781 | M1.78KOHM, 1/16W | 2 | |
| R4487 | ERJ3EKF5600 | M 560 OHM, 1/16W | 1 | |
| R4488 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R4495 | ERJ3EKF4302 | M 43KOHM, 1/16W | 1 | |
| R4496-99 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 4 | |
| R4500 | ERJ3EKF2702V | M27.0KOHM, 1/16W | 1 | |
| R4501,02 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R4503 | ERJ3EKF1600 | M 160 OHM, 1/16W | 1 | |
| R4507-13 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 7 | |
| R4517 | ERJ3EKF1371 | M 13.7 OHM, 1/16W | 1 | |
| R4520 | ERJ3EKF1691 | M1.69KOHM, 1/16W | 1 | |
| R4521,22 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4527 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4533 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4540 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4542 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4544 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4550 | EXB28V220J | RESISTOR ARRAY | 1 | |
| R4552 | EXB28V220J | RESISTOR ARRAY | 1 | |
| R4554 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4555 | EXB28V220J | RESISTOR ARRAY | 1 | |
| R4560,61 | EXB28V220J | RESISTOR ARRAY | 2 | |
| R4563-65 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 3 | |
| R4568 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4583,84 | ERJ2GEJ390 | M 39 OHM, J,0.063W | 2 | |
| R4589-04 | ERJ2GEJ2R2X | M 2.2OHM, J,0.063W | 16 | |
| R4605,06 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4607 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4609,10 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4612,13 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4617,18 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4619 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R4620 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4621 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R4622 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4624 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4626 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R4628 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4629-32 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 4 | |
| R4633,34 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4636 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4637 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R4639 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4640 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4641 | EXB28V330J | RESISTOR ARRAY | 1 | |
| R4642-45 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R4647 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4648 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R4655 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 1 | |
| R4657 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R4658 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4661 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4662 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4665 | EXB2HV220JV | RESISTOR ARRAY | 1 | |
| R4667 | EXB2HV220JV | RESISTOR ARRAY | 1 | |
| R4668 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R4669 | EXB2HV220JV | RESISTOR ARRAY | 1 | |
| R4672,73 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R4675 | ERJ3EKF1802 | M 18KOHM, 1/16W | 1 | |
| R4677 | ERJ3EKF1802 | M 18KOHM, 1/16W | 1 | |
| R4679,80 | ERJ3EKF2202 | M 22KOHM, 1/16W | 2 | |
| R4681,82 | ERJ3EKF3302 | M 33KOHM, 1/16W | 2 | |
| R4701 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 1 | |
| R4704,05 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 2 | |
| R4706 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4708,09 | ERJ2GEJ151 | M 150 OHM, J,0.063W | 2 | |
| R4710 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4711 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4712 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4713,14 | EXB2HV221JV | RESISTOR ARRAY | 2 | |
| R4715 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4718-20 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 3 | |
| R4727 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4729,30 | ERJ3EKF1000 | M 100 OHM, 1/16W | 2 | |
| R4731 | ERJ3EKF1001 | M 1KOHM, 1/16W | 1 | |
| R4732 | ERJ3EKF4751 | M 4.75KOHM, 1/16W | 1 | |
| R4733 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R4734 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R4735 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R4737 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4738,39 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R4743-47 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 5 | |
| R4749,50 | EXB2HV680J | RESISTOR ARRAY | 2 | |
| R4751-54 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 4 | |
| R4756-60 | ERJ2GEJ680 | M 68 OHM, J,0.063W | 5 | |
| R4762 | EXB2HV680J | RESISTOR ARRAY | 1 | |
| R4763-65 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |
| R4772 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4773 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4774 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4775 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4776 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4777 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4778 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4779 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 1 | |
| R4782 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4783 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4784 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4785 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R4788 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4791,92 | ERJ2GEJ470 | M 47 OHM, J,0.063W | 2 | |
| R4793,94 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 2 | |
| R4796 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R4804 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4805,06 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |
| R4807-11 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 5 | |
| R4814 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R4816,17 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 2 | |
| R4819 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R4822 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4823-25 | EXB38VR000 | RESISTOR ARRAY | 3 | |
| R4826,27 | EXB2HVR000 | RESISTOR ARRAY | 2 | |
| R4830,31 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R4832 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 1 | |
| R4833 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4835 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R4837 | ERJ2GEJ220 | M 22 OHM, J,0.063W | 1 | |
| R4838 | ERJ2GEJ112 | M 1.1KOHM, J,0.063W | 1 | |
| R4841 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4846,47 | ERJ2GEJ820 | M 82 OHM, J,0.063W | 2 | |
| R4898 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R4900,01 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R4903 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R4904 | ERJ2GEJ682 | M 6.8KOHM, J,0.063W | 1 | |
| R4905 | ERJ2GEJ152 | M 1.5KOHM, J,0.063W | 1 | |
| R5601 | ERJ3EKF1800 | M 180 OHM, 1/16W | 1 | |
| R5603 | ERJ3EKF1542 | M15.4KOHM, 1/16W | 1 | |
| R5605 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5606 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5607 | ERJ3EKF4531 | M4.53KOHM, 1/16W | 1 | |
| R5609 | ERJ3EKF2000 | M 200 OHM, 1/16W | 1 | |
| R5615 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5617 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5619 | ERJ3GEYJ333 | M 33KOHM,J,1/16W | 1 | |
| R5620 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5621 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5625-27 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 3 | |
| R5632 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R5633 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5634 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R5635 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R5637,38 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R5639 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5640 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5641 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5642 | ERJ3GEYJ471 | M 470 OHM,J,1/16W | 1 | |
| R5643 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5644 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 1 | |
| R5645 | ERJ3EKF2201 | M 2.2KOHM, 1/16W | 1 | |
| R5646 | ERJ3EKF4701 | M 4.7KOHM, 1/16W | 1 | |
| R5647 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R5648 | ERJ3GEYJ392 | M 3.9KOHM,J,1/16W | 1 | |
| R5649 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R5650 | ERJ3GEYJ221 | M 220 OHM,J,1/16W | 1 | |
| R5652 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R5653,54 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R5659 | ERJ3EKF4700 | M 470 OHM, 1/16W | 1 | |
| R5660 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R5662 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5664 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5665 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |
| R5667-69 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 3 | |
| R5672 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5676 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5692 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R5693 | ERJ3GEYJ333 | M 33KOHM,J,1/16W | 1 | |
| R5694 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R5695 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R5801 | ERJ3EKF8450 | M 845 OHM, 1/16W | 1 | |
| R5802 | ERJ3EKF1302 | M 23KOHM, 1/16W | 1 | |
| R5803 | ERJ3EKF2001 | M 2KOHM, 1/16W | 1 | |
| R5804 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R5805-08 | ERJ3GEYJ222 | M 2.2KOHM,J,1/16W | 4 | |
| R5809 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R5822-24 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 3 | |
| R5826 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R5836 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R6001-06 | ERJ14YJ150U | M 15 OHM, J,1/4W | 6 | |
| R6020 | ERG3FJS101D | M 100 OHM, J, 3W | 1 | |
| R6021 | ERJ14YJ150U | M 15 OHM, J,1/4W | 1 | |
| R6022 | ERG3FJS101D | M 100 OHM, J, 3W | 1 | |
| R6023-27 | ERJ14YJ150U | M 15 OHM, J,1/4W | 5 | |
| R6031,32 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6033 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6034 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6041-46 | ERJ14YJ100 | M 10 OHM, J,1/4W | 6 | |
| R6053-56 | ERJ14YJ100 | M 10 OHM, J,1/4W | 4 | |
| R6061,62 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 2 | |
| R6102 | D0GD101JA036 | M 100 OHM,J,0.25W | 1 | |
| R6104 | D0GD101JA036 | M 100 OHM,J,0.25W | 1 | |
| R6106 | D0GD101JA036 | M 100 OHM,J,0.25W | 1 | |
| R6108 | D0GD101JA036 | M 100 OHM,J,0.25W | 1 | |
| R6109 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6110 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6111,12 | D0GD470JA036 | M 47 OHM,J,0.25W | 2 | |
| R6113 | ERJ14YJ224 | M 220KOHM, J,1/4W | 1 | |
| R6114 | D0GD470JA036 | M 47 OHM,J,0.25W | 1 | |
| R6116 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6131,32 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6133,34 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6135,36 | D0GD100JA036 | M 10 OHM,J,0.25W | 2 | |
| R6141,42 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6146,47 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6151,52 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6153,54 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6155,56 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R6157-60 | D0GF1R0JA047 | M 1.0 OHM,J, 0.33W | 4 | |
| R6171 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6172,73 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6181 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6182,83 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6191-94 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 4 | |
| R6195 | D0GD104JA036 | M 100KOHM,J,0.25W | 1 | |
| R6196 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6213 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6214 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6220 | ERDS2TC0 | C 0 OHM, 1/4W | 1 | |
| R6222 | ERG1FJS103D | M 10KOHM, J, 1W | 1 | |
| R6223 | ERG2FJS123D | M 12KOHM, J, 2W | 1 | |
| R6225 | D0GD203JA036 | M 20KOHM,J,0.25W | 1 | |
| R6226,27 | ERJ6GEYJ163 | M 16KOHM,J,1/10W | 2 | |
| R6228 | ERJ6GEYJ562 | M 5.6KOHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6229 | ERJ6GEYJ163 | M 16KOHM,J,1/10W | 1 | |
| R6230 | ERDS2TC0 | C 0 OHM, 1/4W | 1 | |
| R6231 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R6232 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6241 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R6242 | EXB38V472J | RESISTOR ARRAY | 1 | |
| R6243 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R6244 | EXB38V472J | RESISTOR ARRAY | 1 | |
| R6251 | D0GD103JA036 | M 10KOHM,J,0.25W | 1 | |
| R6252,53 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6254 | ERJ6ENF6801 | M 6.8KOHM, 1/10W | 1 | |
| R6255 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6256 | ERJ6ENF1501 | M 1.5KOHM, 1/10W | 1 | |
| R6257 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6258 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6261 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6401-06 | ERJ14YJ150U | M 15 OHM, J,1/4W | 6 | |
| R6421-26 | ERJ14YJ150U | M 15 OHM, J,1/4W | 6 | |
| R6441-46 | ERJ14YJ100 | M 10 OHM, J,1/4W | 6 | |
| R6453-56 | ERJ14YJ100 | M 10 OHM, J,1/4W | 4 | |
| R6465 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6466 | ERJ6ENF5602 | M 56KOHM, 1/10W | 1 | |
| R6467,68 | ERJ6ENF8202 | M 82KOHM, 1/10W | 2 | |
| R6471 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6472 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6473 | ERJ6GEYJ561 | M 560 OHM,J,1/10W | 1 | |
| R6474 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6475,76 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 2 | |
| R6477 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6478 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6479 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6501,02 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6503 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6504,05 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6506 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6507-09 | D0GF1R0JA047 | M 1.0 OHM,J, 0.33W | 3 | |
| R6511,12 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6516,17 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6521,22 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6523,24 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 2 | |
| R6525,26 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 2 | |
| R6531 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6532,33 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6551 | D0GD100JA036 | M 10 OHM,J,0.25W | 1 | |
| R6552,53 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 2 | |
| R6561-64 | EXB38V470J | RESISTOR ARRAY | 4 | |
| R6565-68 | EXB38V472J | RESISTOR ARRAY | 4 | |
| R6581 | D0GD103JA036 | M 10KOHM,J,0.25W | 1 | |
| R6582,83 | ERJ6ENF3902 | M 39KOHM, 1/10W | 2 | |
| R6584 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R6585 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6586 | ERJ6ENF1801 | M 1.8KOHM, 1/10W | 1 | |
| R6587 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6588 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6590 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6591 | EXB38V472J | RESISTOR ARRAY | 1 | |
| R6592 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6603 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6604 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6605 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6606 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R6607 | ERJ6ENF5361 | M5.36KOHM, 1/10W | 1 | |
| R6608,09 | D0GF102JA047 | M 1.0 KOHM,J,0.33W | 2 | |
| R6610 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6611 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R6612 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R6613 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R6614,15 | D0GF243JA047 | M 24 KOHM,J,0.33W | 2 | |
| R6616 | ERJ6ENF1502 | M 15KOHM, 1/10W | 1 | |
| R6617 | ERJ6GEYJ105 | M 1MOHM,J,1/10W | 1 | |
| R6618 | ERJ6ENF1202 | M 12KOHM, 1/10W | 1 | |
| R6619 | ERJ6ENF1501 | M 1.5KOHM, 1/10W | 1 | |
| R6620 | D0D28R2JA021 | M 8.2 OHM,J,5W | 1 | |
| R6621,22 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 2 | |
| R6641-45 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 5 | |
| R6647,48 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 2 | |
| R6658 | D0D1101JA009 | M 100 OHM,J,1W | 1 | |
| R6659,60 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 2 | |
| R6661 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6662 | ERJ6ENF3001 | M 3KOHM, 1/10W | 1 | |
| R6663 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6664 | D0GF222JA047 | M 2.2 KOHM,J,0.33W | 1 | |
| R6665 | ERJ14YJ470 | M 47 OHM,J, 1/2W | 1 | |
| R6666 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R6667,68 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 2 | |
| R6671 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |
| R6672 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6673-75 | D0GD5R6JA059 | M 5.6 OHM,J,0.25W | 3 | |
| R6682 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6683 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6684 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 1 | |
| R6685 | ERJ6GEYJ471 | M 470 OHM,J,1/10W | 1 | |
| R6686 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6687 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6688 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6689 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 1 | |
| R6690 | ERJ6GEYJ151 | M 150 OHM,J,1/10W | 1 | |
| R6691 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6696,97 | D0D32R2JA020 | M 2.2 OHM,J,5W | 2 | |
| R6700-08 | ERJ6GEYJ471 | M 470 OHM,J,1/10W | 9 | |
| R6710-18 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 9 | |
| R6721,22 | EXB38V220J | RESISTOR ARRAY | 2 | |
| R6723 | ERJ6GEYJ222 | M 2.2KOHM,J,1/10W | 1 | |
| R6724 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6742 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6743 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6744 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6745 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6746,47 | D0GD103JA036 | M 10KOHM,J,0.25W | 2 | |
| R6755 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6756-58 | D0GD101JA059 | M 100 OHM,J,0.25W | 3 | |
| R6759 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6760 | ERJ6GEYJ122 | M 1.2KOHM,J,1/10W | 1 | |
| R6761 | ERJ6GEYJ100 | M 10 OHM,J,1/10W | 1 | |
| R6762 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6775,76 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 2 | |
| R6777 | D0GD151JA036 | M 150 OHM,J,0.25W | 1 | |
| R6781 | ERJ6GEYJ470 | M 47 OHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6782 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6791 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R6792 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6793 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6801 | ERX3FJS8R2D | M 8.2 OHM, J, 3W | 1 | |
| R6802 | ERG2FJS683D | M 68KOHM, J, 2W | 1 | |
| R6803 | ERG2FJS563D | M 56KOHM, J, 2W | 1 | |
| R6806,07 | ERX12SJ1R2 | M 1.2 OHM, J,1/2W | 2 | |
| R6808 | D0GD272JA059 | M 2.7KOHM,J,0.25W | 1 | |
| R6809 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6810,11 | ERJ6GEYJ433 | M 43KOHM,J,1/10W | 2 | |
| R6812 | ERJ6ENF2403 | M 240KOHM, 1/10W | 1 | |
| R6813 | ERJ6ENF9101 | M 9.1KOHM, 1/10W | 1 | |
| R6814 | ERJ6ENF5601 | M 5.6KOHM, 1/10W | 1 | |
| R6816 | ERJ6ENF3902 | M 39KOHM, 1/10W | 1 | |
| R6817 | ERJ6ENF1302 | M 13KOHM, 1/10W | 1 | |
| R6819 | ERJ6GEYJ681 | M 680 OHM,J,1/10W | 1 | |
| R6820 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R6821 | ERG2FJS221D | M 220 OHM, J, 2W | 1 | |
| R6822 | ERJ12YJ104U | M 100KOHM, 1/2W | 1 | |
| R6823 | ERG1FJS104D | M 100KOHM, J, 1W | 1 | |
| R6824 | ERJ6GEYJ562 | M 5.6KOHM,J,1/10W | 1 | |
| R6825,26 | ERJ6ENF2703 | M 270KOHM, 1/10W | 2 | |
| R6827 | ERJ6ENF2702 | M 27KOHM, 1/10W | 1 | |
| R6828 | ERJ6ENF5101 | M 5.1KOHM, 1/10W | 1 | |
| R6829,30 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 2 | |
| R6831 | ERJ6GEYJ153 | M 15KOHM,J,1/10W | 1 | |
| R6832 | ERDS1FJ4R7 | C 4.7 OHM, J,1/2W | 1 | |
| R6833-36 | ERJ6ENF5602 | M 56KOHM, 1/10W | 4 | |
| R6837 | ERJ6ENF5102 | M 51KOHM, 1/10W | 1 | |
| R6839 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6841 | ERJ12YJ153U | M 15KOHM, 1/2W | 1 | |
| R6842 | ERJ14YJ433U | M 43KOHM, 1/2W | 1 | |
| R6843 | ERJ6GEYJ623 | M 62KOHM,J,1/10W | 1 | |
| R6844 | D0D2101JA021 | M 100 OHM,J,2W | 1 | |
| R6845 | ERJ6GEYJ623 | M 62KOHM,J,1/10W | 1 | |
| R6846,47 | ERJ6GEYJ563 | M 56KOHM,J,1/10W | 2 | |
| R6848 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 1 | |
| R6849,50 | ERJ6ENF6802 | M 68KOHM, 1/10W | 2 | |
| R6851 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6852 | ERJ6ENF2491 | M2.49KOHM, 1/10W | 1 | |
| R6853 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6858 | D0GD102JA059 | M 1.0KOHM,J,0.25W | 1 | |
| R6860 | D0D28R2JA021 | M 8.2 OHM,J,5W | 1 | |
| R6861 | ERJ6ENF3902 | M 39KOHM, 1/10W | 1 | |
| R6862,63 | ERJ6ENF4702 | M 47KOHM, 1/10W | 2 | |
| R6864 | ERJ6ENF9101 | M 9.1KOHM, 1/10W | 1 | |
| R6865,66 | ERJ6ENF2201 | M 2.2KOHM, 1/10W | 2 | |
| R6867 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6868 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R6869 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6871-73 | ERJ6ENF3902 | M 39KOHM, 1/10W | 3 | |
| R6874 | ERJ6ENF8201 | M 8.2KOHM, 1/10W | 1 | |
| R6875 | ERJ6ENF3301 | M 3.3KOHM, 1/10W | 1 | |
| R6876 | ERJ6ENF1201 | M 1.2KOHM, 1/10W | 1 | |
| R6877 | ERJ6GEYJ392 | M 3.9KOHM,J,1/10W | 1 | |
| R6878 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R6879 | ERJ6GEYJ472 | M 4.7KOHM,J,1/10W | 1 | |
| R6886-88 | ERJ6GEYJ224 | M 220KOHM,J,1/10W | 3 | |
| R6891 | ERJ6GEYJ332 | M 3.3KOHM,J,1/10W | 1 | |
| R6901 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6902-04 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 3 | |
| R6905 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R6909 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6913 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6917 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6924 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6931-34 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 4 | |
| R6935,36 | ERJ8GEYJ224 | M 220KOHM, J,1/8W | 2 | |
| R6951 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6955 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6959 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6963 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6967 | ERJ6GEYJ221 | M 220 OHM,J,1/10W | 1 | |
| R6971 | ERJ6GEYJ101 | M 100 OHM,J,1/10W | 1 | |
| R6972-74 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 3 | |
| R6981-84 | ERJ6GEYJ103 | M 10KOHM,J,1/10W | 4 | |
| R6985,86 | ERJ8GEYJ224 | M 220KOHM, J,1/8W | 2 | |
| R7103-06 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7108 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7110 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7113-16 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7118 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7120 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7123-26 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7128 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7130 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7131 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R7132 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R7133 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7134 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R7135 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7136-39 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R7140-42 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R7201 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R7203-05 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 3 | |
| R7207 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7209,10 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7211-13 | EXB38V471J | RESISTOR ARRAY | 3 | |
| R7215,16 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7221-25 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 5 | |
| R7228,29 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7234,35 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 2 | |
| R7238,39 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 2 | |
| R7240 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7241-44 | EXB38V471J | RESISTOR ARRAY | 4 | |
| R7245 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7246-49 | EXB38V471J | RESISTOR ARRAY | 4 | |
| R7250-53 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7254 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7256 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7257-60 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R7261-63 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R7264-71 | EXB38V470J | RESISTOR ARRAY | 8 | |
| R7274-79 | EXB38V471J | RESISTOR ARRAY | 6 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R7280-85 | EXB38V470J | RESISTOR ARRAY | 6 | |
| R7301-08 | EXB38V470J | RESISTOR ARRAY | 8 | |
| R7309 | EXB38V471J | RESISTOR ARRAY | 1 | |
| R7326-29 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R7330,31 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7332 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7333,34 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R7335,36 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R7337-44 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 8 | |
| R7345-48 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 4 | |
| R7349-56 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 8 | |
| R7357,58 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R7359 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R7360 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R7361 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7362-69 | EXB38V471J | RESISTOR ARRAY | 8 | |
| R7403-06 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7408 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7410 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7413-16 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7418 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7420 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7423-26 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7428 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7430 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7433-36 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7438 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7440 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7441-44 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R7445 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R7446-49 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 4 | |
| R7450-57 | EXB38V470J | RESISTOR ARRAY | 8 | |
| R7459 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 1 | |
| R7460 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7461 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R7462-70 | EXB38V681J | RESISTOR ARRAY | 9 | |
| R7501,02 | EXB38V681J | RESISTOR ARRAY | 2 | |
| R7503 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7504,05 | EXB38V470J | RESISTOR ARRAY | 2 | |
| R7510-13 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7514 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7515 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R7516-19 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7520 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7521-24 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7525 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7526-33 | EXB38V681J | RESISTOR ARRAY | 8 | |
| R7535 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R7536 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R7537 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7538 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7541-43 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 3 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R7544-46 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R7547-54 | EXB38V470J | RESISTOR ARRAY | 8 | |
| R7555 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7556-59 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7560 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R7575 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R7577 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7580-85 | EXB38V681J | RESISTOR ARRAY | 6 | |
| R7586-91 | EXB38V470J | RESISTOR ARRAY | 6 | |
| R7603-06 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7608 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7610 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7613-16 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7618 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7620 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7623-26 | ERJ12YJ6R8U | M 6.8 OHM, J,1/2W | 4 | |
| R7628 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7630 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R7631 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R7632 | ERJ6GEYJ104 | M 100KOHM,J,1/10W | 1 | |
| R7633 | ERJ6GEYJ223 | M 22KOHM,J,1/10W | 1 | |
| R7634 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R7635-38 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 4 | |
| R7639-41 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R7642 | EXB38V681J | RESISTOR ARRAY | 1 | |
| R9060-67 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 8 | |
| R9070 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9074 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9076 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9095 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9097 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9099 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9100,01 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9102 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9106 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9107 | ERJ3GEYJ332 | M 3.3KOHM,J,1/16W | 1 | |
| R9108,09 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9110 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9111 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R9113 | ERJ3GEYJ100 | M 10 OHM,J,1/16W | 1 | |
| R9120 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9121 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9127 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9129 | ERJ3GEYJ683 | M 68KOHM,J,1/16W | 1 | |
| R9134 | ERJ3GEYJ333 | M 33KOHM,J,1/16W | 1 | |
| R9140 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R9141-45 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 5 | |
| R9148 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9149 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9150,51 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9152,53 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9154,55 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 2 | |
| R9156-59 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 4 | |
| R9160,61 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R9164-66 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9167,68 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R9169 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9170-72 | ERJ3GEYJ393 | M 39KOHM,J,1/16W | 3 | |
| R9173-75 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9177 | ERJ3GEYJ223 | M 22KOHM,J,1/16W | 1 | |
| R9178 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9179 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R9180 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9181-84 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 4 | |
| R9185,86 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9187,88 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 2 | |
| R9189,90 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9192 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9193 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9194 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9196 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9198 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9199 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9201,02 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9203 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 1 | |
| R9204,05 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9206,07 | ERJ3GEYJ102 | M 1KOHM,J,1/16W | 2 | |
| R9209 | ERJ3GEYJ100 | M 10 OHM,J,1/16W | 1 | |
| R9210 | ERJ3GEYJ272 | M 2.7KOHM,J,1/16W | 1 | |
| R9215 | ERJ3GEYJ123 | M 12KOHM,J,1/16W | 1 | |
| R9217-22 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 6 | |
| R9236 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9237 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9244,45 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |
| R9247,48 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9300,01 | ERJ3GEYJ820 | M 82 OHM,J,1/16W | 2 | |
| R9302,03 | D1HG8208A002 | NETWORK RESISTER | 2 | |
| R9304,05 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9306,07 | EXB38V820J | RESISTOR ARRAY | 2 | |
| R9308 | D1HG8208A002 | NETWORK RESISTER | 1 | |
| R9309,10 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9311,12 | ERJ3GEYJ820 | M 82 OHM,J,1/16W | 2 | |
| R9313,14 | D1HG8208A002 | NETWORK RESISTER | 2 | |
| R9315,16 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9318 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9319 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9320 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9367 | ERJ3GEYJ181 | M 180 OHM,J,1/16W | 1 | |
| R9371 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9372 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9373 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9374 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9375 | ERJ3GEYJ151 | M 150 OHM,J,1/16W | 1 | |
| R9389-91 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9393-95 | D1HG8208A002 | NETWORK RESISTER | 3 | |
| R9396,97 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9398 | EXB38V820J | RESISTOR ARRAY | 1 | |
| R9404 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9412-21 | EXB38V470J | RESISTOR ARRAY | 10 | |
| R9428 | EXB38V103J | RESISTOR ARRAY | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R9430 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9433 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9437,38 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9440 | EXB2HV470JV | RESISTOR ARRAY | 1 | |
| R9441 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9442 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9443 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9444 | D1HG8208A002 | NETWORK RESISTER | 1 | |
| R9445 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9446 | EXB38V820J | RESISTOR ARRAY | 1 | |
| R9448 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9449,50 | D1HG8208A002 | NETWORK RESISTER | 2 | |
| R9451,52 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9453-57 | D1HG8208A002 | NETWORK RESISTER | 5 | |
| R9458,59 | ERJ3GEYJ820 | M 82 OHM,J,1/16W | 2 | |
| R9460,61 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9462,63 | EXB38V820J | RESISTOR ARRAY | 2 | |
| R9464,65 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 2 | |
| R9466,67 | ERJ3GEYJ820 | M 82 OHM,J,1/16W | 2 | |
| R9468 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9469 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9470 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9471 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9472 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9475 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9480 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9482-85 | ERJ3EKF1001 | M 1KOHM, 1/16W | 4 | |
| R9486 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9487 | ERJ3GEYJ151 | M 150 OHM,J,1/16W | 1 | |
| R9488 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9489-95 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 7 | |
| R9496 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9497 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 1 | |
| R9498 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9506 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9507 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 1 | |
| R9512 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9514 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9515 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9523 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9525 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9526 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9527,28 | EXB2HV272JV | RESISTOR ARRAY | 2 | |
| R9529,30 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9531-33 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R9534 | EXB38V470J | RESISTOR ARRAY | 1 | |
| R9535,36 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9537 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9539 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9542 | ERJ3GEYJ680 | M 68 OHM,J,1/16W | 1 | |
| R9543,44 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9545 | ERJ3GEYJ304V | M 300KOHM,J,1/16W | 1 | |
| R9546 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9548-50 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9552-54 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R9556 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9560 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9574 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R9578 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9580-83 | ERJ3EKF1001 | M 1KOHM, 1/16W | 4 | |
| R9584 | ERJ3GEYJ330 | M 33 OHM,J,1/16W | 1 | |
| R9585,86 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 2 | |
| R9587-95 | EXB38V470J | RESISTOR ARRAY | 9 | |
| R9596-99 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 4 | |
| R9602 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9616 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9619,20 | ERJ3GEYJ472 | M 4.7KOHM,J,1/16W | 2 | |
| R9622 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9624,25 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9628 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9630 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9631 | EXB2HV272JV | RESISTOR ARRAY | 1 | |
| R9632-34 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 3 | |
| R9637 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9639 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9641 | ERJ3GEYJ470 | M 47 OHM,J,1/16W | 1 | |
| R9643 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9645 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9800 | ERJ3EKF1302 | M 23KOHM, 1/16W | 1 | |
| R9801 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R9802 | ERJ3EKF6202 | M 62KOHM, 1/16W | 1 | |
| R9803 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9804 | ERJ3EKF2402 | M 24KOHM, 1/16W | 1 | |
| R9805 | ERJ3EKF3002 | M 30KOHM, 1/16W | 1 | |
| R9806 | ERJ3EKF3902 | M 39KOHM, 1/16W | 1 | |
| R9807 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9808 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9810 | ERJ3EKF3001 | M 3KOHM, 1/16W | 1 | |
| R9813 | ERJ3EKF2401 | M 2.4KOHM, 1/16W | 1 | |
| R9814 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R9815 | ERJ3EKF2202 | M 22KOHM, 1/16W | 1 | |
| R9816 | ERJ3EKF8202 | M 82KOHM, 1/16W | 1 | |
| R9821 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 1 | |
| R9823-28 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 6 | |
| R9830,31 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 2 | |
| R9838,39 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 2 | |
| R9840 | ERJ3GEYJ220 | M 22 OHM,J,1/16W | 1 | |
| R9841 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9842-44 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 3 | |
| R9845 | ERJ3GEYJ562 | M 5.6KOHM,J,1/16W | 1 | |
| R9846,47 | EXB2HV272JV | RESISTOR ARRAY | 2 | |
| R9848,49 | EXB2HV470JV | RESISTOR ARRAY | 2 | |
| R9850 | ERJ3GEYJ473 | M 47KOHM,J,1/16W | 1 | |
| R9854 | ERJ3GEYJ101 | M 100 OHM,J,1/16W | 1 | |
| R9859 | EXB38V101J | RESISTOR ARRAY | 1 | |
| R9868 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9869-71 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9872 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9875-77 | ERJ3GEYJ103 | M 10KOHM,J,1/16W | 3 | |
| R9878 | ERJ3EKF3902 | M 39KOHM, 1/16W | 1 | |
| R9879 | ERJ3EKF2002 | M 20KOHM, 1/16W | 1 | |
| R9880 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R9883 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9884 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |
| R9891 | ERJ3EKF4702 | M 47KOHM, 1/16W | 1 | |
| R9892 | ERJ3EKF1502 | M 15KOHM, 1/16W | 1 | |
| R9893 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |
| R9896 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R9897 | ERJ3GEYJ104 | M 100KOHM,J,1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| RF101 | A5MC100JP2 | 139C 10 | 1 | ⚠ |
| | | | | |
| RM2510 | PNA4701M05TV | REMOCO RECEIVER | 1 | |
| | | | | |
| RTL | TNAG170S | DT-PACK | 1 | PAVCA ⚠ |
| RTL | TNPA3769ABE | CIRCUIT BOARD H | 1 | PAVCA ⚠ |
| RTL | TNPA3855E | CIRCUIT BOARD HC | 1 | PAVCA ⚠ |
| RTL | TNPA3903BHS | CIRCUIT BOARD DG | 1 | PAVCA ⚠ |
| RTL | TXNPA1BJTUE | CIRCUIT BOARD PA | 1 | PAVCA ⚠ |
| RTL | ETXMM610MEF | CIRCUIT BOARD P | 1 | PAVCA ⚠ |
| RTL | TXNC11BHTUE | CIRCUIT BOARD C1 | 1 | PAVCA ⚠ |
| RTL | TXNC21BHTUE | CIRCUIT BOARD C2 | 1 | PAVCA ⚠ |
| RTL | TXNC31BHTUE | CIRCUIT BOARD C3 | 1 | PAVCA ⚠ |
| RTL | TXNC41BHTUE | CIRCUIT BOARD C4 | 1 | PAVCA ⚠ |
| RTL | TXNC51BHTUE | CIRCUIT BOARD C5 | 1 | PAVCA ⚠ |
| RTL | TXNC61BHTUE | CIRCUIT BOARD C6 | 1 | PAVCA ⚠ |
| RTL | TNPA3820ACS | CIRCUIT BOARD D | 1 | PAVCA ⚠ |
| RTL | TXNSC1BHTUE | CIRCUIT BOARD SC | 1 | PAVCA ⚠ |
| RTL | TXNSD1BHTUE | CIRCUIT BOARD SD | 1 | PAVCA ⚠ |
| RTL | TNPA3829S | CIRCUIT BOARD SS2 | 1 | PAVCA ⚠ |
| RTL | TXNSS1BHTUE | CIRCUIT BOARD SS | 1 | PAVCA ⚠ |
| RTL | TNPA3830S | CIRCUIT BOARD SS3 | 1 | PAVCA ⚠ |
| RTL | TXNSU1BHTUE | CIRCUIT BOARD SU | 1 | PAVCA ⚠ |
| RTL | TNPA3603AES | CIRCUIT BOARD K | 1 | PAVCA ⚠ |
| RTL | TNPA3604ACS | CIRCUIT BOARD S | 1 | PAVCA ⚠ |
| | | | | |
| S2 | K1KA02AA0193 | 2P CONNECTOR | 1 | |
| | | | | |
| SC2 | K1KA02A00626 | 2P CONNECTOR | 1 | |
| SC20 | K1KA20AA0008 | 20P CONNECTOR | 1 | |
| SC23 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| SC30 | K1KA08AA0192 | 8P CONNECTOR | 1 | |
| SC41,42 | K1ML80B00001 | 80P CONNECTOR | 2 | |
| SC45,46 | K1KA09A00239 | 9P CONNECTOR | 2 | |
| | | | | |
| SD1-D4 | K1MN96B00006 | 96P CONNECTOR | 4 | |
| SD46 | K1KB09A00045 | 9P CONNECTOR | 1 | |
| | | | | |
| SS11 | K1KA02A00626 | 2P CONNECTOR | 1 | |
| SS12 | K1KA10AA0194 | 10P CONNECTOR | 1 | |
| SS20,21 | K1KA07A00170 | 7P CONNECTOR | 2 | |
| SS22,23 | K1KB07AA0087 | 7P CONNECTOR | 2 | |
| SS33 | K1KA04AA0193 | 4P CONNECTOR | 1 | |
| SS34 | K1KA03AA0193 | 3P CONNECTOR | 1 | |
| SS43 | K1KA12AA0194 | 12P CONNECTOR | 1 | |
| SS44 | K1KA04AA0193 | 4P CONNECTOR | 1 | |
| SS51-56 | K1MN13B00020 | 13P CONNECTOR | 6 | |
| | | | | |
| SU1-U4 | K1MN96B00006 | 96P CONNECTOR | 4 | |
| SU45 | K1KB09A00045 | 9P CONNECTOR | 1 | |
| | | | | |
| SW2500 | K0F122A00172 | SWITCREMOTE CONTROLH | 1 | |
| SW3751-55 | EVQ11G05R | SWITCH | 5 | |
| | | | | |
| T201 | ETB57LZ156AD | TRANS | 1 | ⚠ |
| T301 | ETB50LZ116AD | TRANS | 1 | ⚠ |
| T501 | ETB25KA1C6AD | TRANS | 1 | ⚠ |
| T6602 | ETS25AZ149AD | TRANS | 1 | |
| | | | | |
| VR251 | EVMEASA01B54 | VARIABLE RESISTOR | 1 | |
| VR351 | EVMEASA01B14 | VARIABLE RESISTOR | 1 | |
| VR401 | EVMEASA01B34 | VARIABLE RESISTOR | 1 | |
| VR6000 | EVMEASA00B14 | CONTROL 10KOHMB 0.3W | 1 | |
| VR6600 | EVMEASA00B13 | CONTROL 1KOHMB 0.3W | 1 | |
| VR6602 | EVMEASA00B53 | CONTROL 5KOHMB 0.3W | 1 | |
| | | | | |
| X1100 | H0J100500030 | CRYSTAL | 1 | |
| X1101 | H0J327200114 | CRYSTAL | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| X4004 | H0J270500087 | CRYSTAL | 1 | |
| X9000 | H2D200500011 | CRYSTAL | 1 | |
| X9500 | H0J200500038 | CRYSTAL | 1 | |
| | | | | |
| Z101 | TND14V751 | VARISTOR | 1 | ⚠ |
| Z102 | ERZVGAD471 | VARISTOR | 1 | ⚠ |
| Z501 | ERZVGAD471 | VARISTOR | 1 | ⚠ |
| | | | | |
| ZA2300,01 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 2 | |
| ZA4001 | K4CD08000002 | TERMINAL | 1 | |
| ZA4003-05 | K4CD08000002 | TERMINAL | 3 | |
| ZA4007-09 | TESA169 | SHIELD CLIP | 3 | |
| ZA4011-14 | TESA169 | SHIELD CLIP | 4 | |
| ZA5600,01 | K4CZ01000027 | COMPATIBLE WITH JALCO K9 | 2 | |
| ZA6001-03 | K4CD01000011 | TERMINAL | 3 | |
| ZA6401-03 | K4CD01000011 | TERMINAL | 3 | |
| ZA7101-05 | K4CD01000013 | TERMINAL | 5 | |
| ZA7201-05 | K4CD01000013 | TERMINAL | 5 | |
| ZA7301-05 | K4CD01000013 | TERMINAL | 5 | |
| ZA7401-05 | K4CD01000013 | TERMINAL | 5 | |
| ZA7501-05 | K4CD01000013 | TERMINAL | 5 | |
| ZA7601-05 | K4CD01000013 | TERMINAL | 5 | |
| ZA9001 | K4CD01000011 | TERMINAL | 1 | |
| | | | | |
| ZD101 | MA8051 | ZENER DIODE | 1 | |
| ZD351-54 | MA8150 | ZENER DIODE | 4 | |
| ZD405,06 | MA4300N | ZENER DIODE | 2 | |
| ZD407 | MA4120N | ZENER DIODE | 1 | |
| ZD408 | MA8220 | ZENER DIODE | 1 | |
| ZD501 | MA8270 | ZENER DIODE | 1 | |
| ZD502 | MA4300N | ZENER DIODE | 1 | |
| | | | | |
| C8099,00 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8101,02 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8103,04 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8105 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C8106,07 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8108 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8109 | EEEHB0G101R | C 100PF, J, 4V | 1 | |
| C8110,11 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8112 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8113-18 | ECJ0EB1A104K | C 0.1UF, K, 10V | 6 | |
| C8120,21 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8128,29 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8144 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8145 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8162 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8164 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8170 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C8200 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8201 | ECJ1VB1H103K | C 0.001UF, K, 50V | 1 | |
| C8202,03 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8204 | EEEHB0J221P | C 220PF, J, 6.3V | 1 | |
| C8205 | EEEHB1H220P | C 22PF, J, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C8206,07 | EEEHB0J221P | C 220PF, J, 6.3V | 2 | |
| C8208 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| C8211 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| C8212 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8218,19 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8220 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8222 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8224,25 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8226 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C8228,29 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8231 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8233 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8234,35 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8237 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8238,39 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8240 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8241 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8244 | ECJ1VF1A105Z | C 1UF, Z, 10V | 1 | |
| C8245 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8246 | EEEHB0G470R | C 47PF, J, 4V | 1 | |
| C8247 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8253 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8254 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8255 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8272,73 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8298,99 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8302 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8303 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C8304,05 | ECJ0EC1H150J | C 15PF, K, 50V | 2 | |
| C8306 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8308-10 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8311,12 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8313-15 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8316 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C8317-19 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8320 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8321-23 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8327 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C8329-31 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8332 | ECJ0EC1H151J | C 180PF, K, 50V | 1 | |
| C8333,34 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8336 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8337 | EEEHB1C100R | C 10PF, J, 16V | 1 | |
| C8338 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8342-44 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8345,46 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C8347-53 | ECJ0EB1A104K | C 0.1UF, K, 10V | 7 | |
| C8355 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8356 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8357,58 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8359 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| C8360 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8361 | ECJ0EC1H270J | C 270PF, K, 50V | 1 | |
| C8362 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8365 | ECJ1VB1A224K | C 0.22UF, Z, 50V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C8368-76 | ECJ0EB1A104K | C 0.1UF, K, 10V | 9 | |
| C8377 | ECJ0EB1C223K | C 0.022UF, K, 16V | 1 | |
| C8413,14 | ECJ0EC1H120J | C 120PF, K, 50V | 2 | |
| C8415 | ECJ0EB1H471K | C 470PF, K, 50V | 1 | |
| C8419 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C8420,21 | ECJ0EB1H102K | C 1000PF, K, 50V | 2 | |
| C8430 | ECJ0EC1H050C | C 5PF, D, 50V | 1 | |
| C8432 | ECJ0EC1H270J | C 270PF, K, 50V | 1 | |
| C8433,34 | ECJ0EC1H101J | C 100PF, K, 50V | 2 | |
| C8435,36 | ECJ0EC1H470J | C 470PF, K, 50V | 2 | |
| C8437 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8440,41 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8445 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8446 | ECJ0EB1H182K | C 1800UF, Z, 50V | 1 | |
| C8450-52 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 3 | |
| C8453 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8456,57 | F1J0J475A035 | C 4.7UF, K, 16V | 2 | |
| C8467,68 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8469 | ECJ1VB0J334K | C 0.33UF, K,6.3V | 1 | |
| C8474 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8475,76 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8477 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8478 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8479,80 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8482 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8483 | ECJ0EC1H101J | C 100PF, K, 50V | 1 | |
| C8484 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8485 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C8486 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C8487 | ECJ0EC1H151J | C 180PF, K, 50V | 1 | |
| C8488 | ECJ0EC1H101J | C 100PF, K, 50V | 1 | |
| C8492 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C8495 | ECJ0EC1H020C | C 2PF, D, 50V | 1 | PAVCA |
| C8496 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8500 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 1 | |
| C8501 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8503,04 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8505 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8506 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C8507,08 | ECJ2FF1A475Z | C 4.7UF, Z, 10V | 2 | |
| C8509 | EEEHB1C470P | C 47PF, J, 16V | 1 | |
| C8510 | ECJ0EC1H050C | C 5PF, D, 50V | 1 | |
| C8511 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8515 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8516 | F2G0J470A019 | E 47UF 6.3V | 1 | |
| C8517 | ECJ0EC1H050C | C 5PF, D, 50V | 1 | |
| C8518 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8520,21 | ECJ0EC1H181J | C 180PF, K, 50V | 2 | |
| C8522,23 | ECJ0EC1H390J | C 390PF, K, 50V | 2 | |
| C8529 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8530 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8531 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C8532 | ECJ0EB1C223K | C 0.022UF, K, 16V | 1 | |
| C8533,34 | ECJ1XB1C104K | C 0.1UF, Z, 16V | 2 | |
| C8535 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8536 | ECJ1XB1H102K | C 1000UF, Z, 50V | 1 | |
| C8537 | ECJ0EB1H471K | C 470PF, K, 50V | 1 | |
| C8538 | ECJ1VF1H104Z | C 0.1UF, Z, 50V | 1 | |
| C8542 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| C8546,47 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8550 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8551 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8552 | ECJ1VB1C105K | C 0.01UF, K, 16V | 1 | |
| C8553-55 | ECJ0EB1A104K | C 0.1UF, K, 10V | 3 | |
| C8556 | ECJ1VB0J475K | C 4.7UF, K, 6.3V | 1 | |
| C8557 | F1J1A106A043 | C 0.010UF, K, 16V | 1 | |
| C8558 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8559,60 | EEEHB1C470P | C 47PF, J, 16V | 2 | |
| C8561 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8563 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8567 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8568 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C8572 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8573 | ECJ2FB0J106M | C 10UF, Z,6.3V | 1 | |
| C8577 | ECJ0EC1H270J | C 270PF, K, 50V | 1 | |
| C8578 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8579 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8580,81 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8584 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8590 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8592 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8594 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8595,96 | ECJ0EB1C103K | C0.010UF, K, 16V | 2 | |
| C8597 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8598 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8600 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8601 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8602-04 | ECJ0EB1C103K | C0.010UF, K, 16V | 3 | |
| C8605 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8606 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8607 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8608 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8609 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8610 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8611,12 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8613 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8614 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8615,16 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8617 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8620 | ECJ0EB1A104K | C 0.1UF, K, 10V | 1 | |
| C8621 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8622 | ECGRL0G680ER | C 68PF, J, 4V | 1 | |
| C8624 | ECJ0EB1C103K | C0.010UF, K, 16V | 1 | |
| C8626-28 | ECJ0EB1C103K | C0.010UF, K, 16V | 3 | |
| C8629,30 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8633,34 | ECJ0EC1H151J | C 180PF, K, 50V | 2 | |
| C8635,36 | ECJ0EC1H100D | C 10PF, K, 50V | 2 | |
| C8639 | ECJ1XB0J105K | C 1UF, K, 16V | 1 | |
| C8644,45 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8646 | ECJ0EB1H102K | C 1000PF, K, 50V | 1 | |
| C8652 | ECJ2FF1A106Z | C 0.001UF, Z, 10V | 1 | |
| C8653,54 | ECJ1XB0J105K | C 1UF, K, 16V | 2 | |
| C8660,61 | ECJ0EB1A104K | C 0.1UF, K, 10V | 2 | |
| C8662-64 | ECJ0EB1H102K | C 1000PF, K, 50V | 3 | |
| | | | | |
| D8203,04 | LNJ208R8ARA | LED | 2 | |
| D8208 | K7JAAAB00001 | DIODE | 1 | |
| D8224 | B0JCME000037 | DIODE | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| D8225 | B0JCDD000002 | DIODE | 1 | |
| D8226 | B0JCME000037 | DIODE | 1 | |
| D8227 | B0JCDD000002 | DIODE | 1 | |
| | | | | |
| DT07 | K1KA04BA0050 | 4P CONNECTOR | 1 | |
| DT09 | K1NA09D00004 | 9P CONNECTOR | 1 | |
| DT12 | K1KAB0A00011 | CONNECTOR | 1 | |
| | | | | |
| FL8215 | J0HAAC000045 | LC FILTER | 1 | |
| FL8224-34 | J0HAAC000045 | LC FILTER | 11 | |
| FL8236,37 | J0HAAC000045 | LC FILTER | 2 | |
| FL8262,63 | J0MAB0000164 | LC FILTER | 2 | |
| FL8264,65 | J0HAAC000045 | LC FILTER | 2 | |
| | | | | |
| IC8009,10 | C3ABRG000061 | IC | 2 | |
| IC8022 | C0ZBZ0001052 | IC | 1 | |
| IC8200 | C0FBBK000038 | IC | 1 | |
| IC8201 | C0ABBB000190 | IC | 1 | |
| IC8202 | C0JBAS000245 | IC | 1 | |
| IC8203,04 | C0JBAS000223 | IC | 2 | |
| IC8205 | C0ABBA000025 | IC | 1 | |
| IC8206 | C1AB00002471 | IC | 1 | PAVCA |
| IC8211 | MN884321B | IC | 1 | |
| IC8227 | C0EBE0000336 | IC | 1 | |
| IC8228 | C0EBM0000027 | IC | 1 | |
| IC8229 | C3EBJC000055 | IC | 1 | |
| IC8235 | C0DBZFF00004 | IC | 1 | |
| IC8240 | MN2WS0025B-A | IC | 1 | |
| IC8244 | C0FBAK000024 | IC | 1 | |
| IC8246,47 | C0DBAYY00054 | IC | 2 | |
| IC8254 | TVRN838S | IC | 1 | PAVCA |
| | | | | |
| L8096 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8141-43 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| L8200-03 | J0JHC0000045 | CHIP INDUCTOR | 4 | |
| L8209 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8211 | ELJNA1R0JFB | INDUCTION COIL | 1 | |
| L8221 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8223-25 | J0JHC0000045 | CHIP INDUCTOR | 3 | |
| L8239 | J0JCC0000241 | CHIP INDUCTOR | 1 | |
| L8240 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8242 | J0JCC0000078 | CHIP INDUCTOR | 1 | |
| L8243 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| L8244 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8250 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8253-56 | TSK1032 | BEAD CHOKE | 4 | |
| L8258 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8264-68 | J0JHC0000045 | CHIP INDUCTOR | 5 | |
| L8283-85 | J0JHC0000045 | CHIP INDUCTOR | 3 | |
| L8288,89 | J0JHC0000045 | CHIP INDUCTOR | 2 | |
| L8290 | G1C3R3ZA0083 | INDUCTION COIL | 1 | |
| L8291 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L8292 | G1C1R5ZA0083 | INDUCTION COIL | 1 | |
| L8293 | G1C100MA0077 | INDUCTION COIL | 1 | |
| L8294 | J0JHC0000034 | CHIP INDUCTOR | 1 | |
| L8297 | J0JHC0000045 | CHIP INDUCTOR | 1 | |
| L8298,99 | TSK1032 | BEAD CHOKE | 2 | |
| L8303,04 | G1CR22JA0020 | INDUCTION COIL | 2 | PAVCA |
| L8305 | G1CR39JA0020 | INDUCTION COIL | 1 | PAVCA |
| L8306 | J0JHC0000045 | CHIP INDUCTOR | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| | | | | |
| Q8209-11 | B1ADDF000005 | TRANSISTOR | 3 | |
| Q8217-20 | B1ABDF000034 | TRANSISTOR | 4 | |
| Q8227,28 | B1ADDF000005 | TRANSISTOR | 2 | |
| Q8229,30 | B1MBDDA00003 | TRANSISTOR | 2 | |
| | | | | |
| R8137 | ERJ2GEJ121 | M 120 OHM, J,0.063W | 1 | |
| R8140,41 | ERJ3EKF1001 | M 1KOHM, 1/16W | 2 | |
| R8144-47 | D1HG5608A002 | NETWORK RESISTER | 4 | |
| R8148,49 | D1HG3908A002 | NETWORK RESISTER | 2 | |
| R8150-62 | ERJ2GEJ390 | M 39 OHM, J,0.063W | 13 | |
| R8163-66 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 4 | |
| R8200-03 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 4 | |
| R8206 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8207 | ERJ2GEJ562 | M 5.6KOHM,J,0.063W | 1 | |
| R8208 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8209 | ERJ2GEJ273 | M 27KOHM ,J,0.063W | 1 | |
| R8210 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8211 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8216 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8217 | ERJ2GEJ562 | M 5.6KOHM,J,0.063W | 1 | |
| R8218 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8219 | ERJ2GEJ153 | M 15KOHM ,J,0.063W | 1 | |
| R8220 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R8228 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8270 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R8272 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8273,74 | ERJ3GEYJ510 | M 51 OHM,J,1/16W | 2 | |
| R8277 | ERJ3EKF1202 | M 12KOHM, 1/16W | 1 | |
| R8282 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R8285 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8287 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8288 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8289,90 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8291 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8293 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8297 | ERJ2GEJ102 | M 1KOHM, J,0.063W | 1 | |
| R8300 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8301 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8303 | ERJ2GEJ272 | M 2.7KOHM, J,0.063W | 1 | |
| R8304,05 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8310,11 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8312 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8313 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8314,15 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 2 | |
| R8316-18 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 3 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R8322-25 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 4 | |
| R8333-36 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 4 | |
| R8338 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8342 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8343 | ERJ2GEJ181 | M 180 OHM, J,0.063W | 1 | |
| R8344,45 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8347 | ERJ2GEJ221 | M 220 OHM, J,0.063W | 1 | |
| R8349 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8351 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8354 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8355 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8366-69 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 4 | |
| R8380 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8417,18 | D1HG1218A002 | NETWORK RESISTER | 2 | |
| R8421 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8424 | ERJ3EKF2742 | M27.4KOHM, 1/16W | 1 | |
| R8425 | ERJ3EKF9311 | M9.31KOHM, 1/16W | 1 | |
| R8426-28 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R8431 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8433 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8435 | ERJ3EKF6191 | M6.19KOHM, 1/16W | 1 | |
| R8436 | ERJ3EKF4642 | M46.4KOHM, 1/16W | 1 | |
| R8440 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8455 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8458 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8460 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8461 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8462,63 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 2 | |
| R8464,65 | EXB2HV104JV | RESISTOR ARRAY | 2 | |
| R8468 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8470 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8471 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8476 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8477 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 1 | |
| R8478 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8479,80 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 2 | |
| R8481 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8483-87 | ERJ3GEYJ560 | M 56 OHM,J,1/16W | 5 | |
| R8488 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8489 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8490 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8491-94 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 4 | |
| R8496 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8501 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8503 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8504-06 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 3 | |
| R8507-09 | ERJ3EKF1002 | M 10KOHM, 1/16W | 3 | |
| R8510 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8511 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8512-18 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 7 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R8519 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8524 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8525,26 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8527 | ERJ2GEJ392 | M 3.9KOHM, J,0.063W | 1 | |
| R8528 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8529,30 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8531 | EXB38V560J | RESISTOR ARRAY | 1 | |
| R8532-35 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 4 | |
| R8536 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8537 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8538 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8539 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8540 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8541-47 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 7 | |
| R8548 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8550,51 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8552 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8553 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8557 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8558 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8559 | EXB38V560J | RESISTOR ARRAY | 1 | |
| R8560 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8561 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8562 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8564,65 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8566 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8567 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8568 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8570-73 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 4 | |
| R8574 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8576-78 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 3 | |
| R8582-89 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 8 | |
| R8591-95 | ERJ2GEJ330 | M 33 OHM, J,0.063W | 5 | |
| R8596,97 | D1HG33080001 | NETWORK RESISTER | 2 | |
| R8598-00 | D1HG5608A002 | NETWORK RESISTER | 3 | |
| R8601 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8602 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8605-08 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 4 | |
| R8610-15 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 6 | |
| R8629 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8630 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8631 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R8632-37 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 6 | |
| R8640 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8641 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8643 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8645 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8646 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R8647 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8648 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8649 | ERJ3EKF75R0 | M 0.75HM, 1/16W | 1 | |
| R8650 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8651 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8652 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R8653 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8654,55 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 2 | |
| R8656 | ERJ3EKF1002 | M 10KOHM, 1/16W | 1 | |
| R8657 | ERJ3EKF2702V | M27.0KOHM, 1/16W | 1 | |
| R8658 | ERJ2GEJ560 | M 56 OHM, J,0.063W | 1 | |
| R8659 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8661 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R8665 | EXB2HVR000 | RESISTOR ARRAY | 1 | |
| R8666 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8667 | ERJ2GEJ331 | M 330 OHM, J,0.063W | 1 | |
| R8669 | ERJ2GEJ331 | M 330 OHM, J,0.063W | 1 | |
| R8671,72 | ERJ6GEYJ102 | M 1KOHM,J,1/10W | 2 | |
| R8673 | EXB2HVR000 | RESISTOR ARRAY | 1 | |
| R8674 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8678 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8682 | ERJ3EKF4702 | M 47KOHM, 1/16W | 1 | |
| R8686,87 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8688,89 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8690 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R8691 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8692 | ERJ3EKF5102 | M51.0KOHM, 1/16W | 1 | |
| R8693 | ERJ2GEJ333 | M 33KOHM, J,0.063W | 1 | |
| R8695 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R8696 | ERJ3EKF5102 | M51.0KOHM, 1/16W | 1 | |
| R8697 | ERJ2GEJ223 | M 22KOHM, J,0.063W | 1 | |
| R8698 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8700 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8702 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8704 | ERJ2GEJ101 | M 100 OHM, J,0.063W | 1 | |
| R8705 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8706 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8707 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8708 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8709 | ERJ3EKF1272 | M12.7KOHM, 1/16W | 1 | |
| R8710 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8711 | ERJ2GEJ222 | M 2.2KOHM, J,0.063W | 1 | |
| R8712 | ERJ2GEJ472 | M 4.7KOHM, J,0.063W | 1 | |
| R8715 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 1 | |
| R8716 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8717 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8719 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8720-25 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 6 | |
| R8726 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8727 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8732 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8733 | ERJ3EKF3572 | M35.7KOHM, 1/16W | 1 | |
| R8734 | ERJ3EKF3242 | M32.4KOHM, 1/16W | 1 | |
| R8735 | ERJ2GEJ104 | M 100KOHM, J,0.063W | 1 | |
| R8736 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8738 | ERJ3EKF6802 | M 68KOHM, 1/16W | 1 | |
| R8741,42 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8744 | ERJ3EKF3602 | M 36KOHM, 1/16W | 1 | |

| Ref. No. | Part No. | Part Name & Description | Pcs | Remarks |
|---|---|---|---|---|
| R8746 | ERJ3EKF4992 | M 49.9KOHM, 1/16W | 1 | |
| R8747,48 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 2 | |
| R8749 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| R8751-53 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 3 | |
| R8754 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8755 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8756,57 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8777 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 1 | |
| R8779 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8780,81 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8782-87 | EXB38VR000 | RESISTOR ARRAY | 6 | |
| R8788 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8791 | ERJ2GEJ332 | M 3.3KOHM, J,0.063W | 1 | |
| R8792,93 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 2 | |
| R8794 | ERJ6GEY0R00 | M 0 OHM, 1/10W | 1 | |
| R8799-02 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 4 | |
| R8817,18 | ERJ2GEJ473 | M 47KOHM,J,0.063W | 2 | |
| R8821-26 | ERJ3GEY0R00 | M 0 OHM, 1/16W | 6 | |
| R8837,38 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 2 | |
| R8839 | ERJ3EKF6801 | M 6.8KOHM, 1/16W | 1 | |
| R8841 | ERJ3EKF1801 | M 1.8KOHM, 1/16W | 1 | |
| R8842 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8843 | ERJ2GEJ182 | M 1.8KOHM, J,0.063W | 1 | |
| R8844 | ERJ2GE0R00 | M 0.0 OHM, J,0.063W | 1 | |
| R8845 | ERJ2GEJ103 | M 10KOHM, J,0.063W | 1 | |
| | | | | |
| TU8200 | ENGE6408DF | TUNER | 1 | PAVCA ⚠ |
| | | | | |
| X8005 | H0J270500061 | CRYSTAL | 1 | |
| X8200 | H0J250500050 | CRYSTAL | 1 | |
| | | | | |
| XF8200 | J0C4405B0004 | LC FILTER | 1 | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |